

MECCANO



(TRADE MARK 296321)

INSTRUCTIONS


FOR OUTFITS Nos. 1 to 3.

1/-

Copyright by MECCANO LIMITED, LIVERPOOL, throughout the World

No. 21A

ENGLISH EDITION

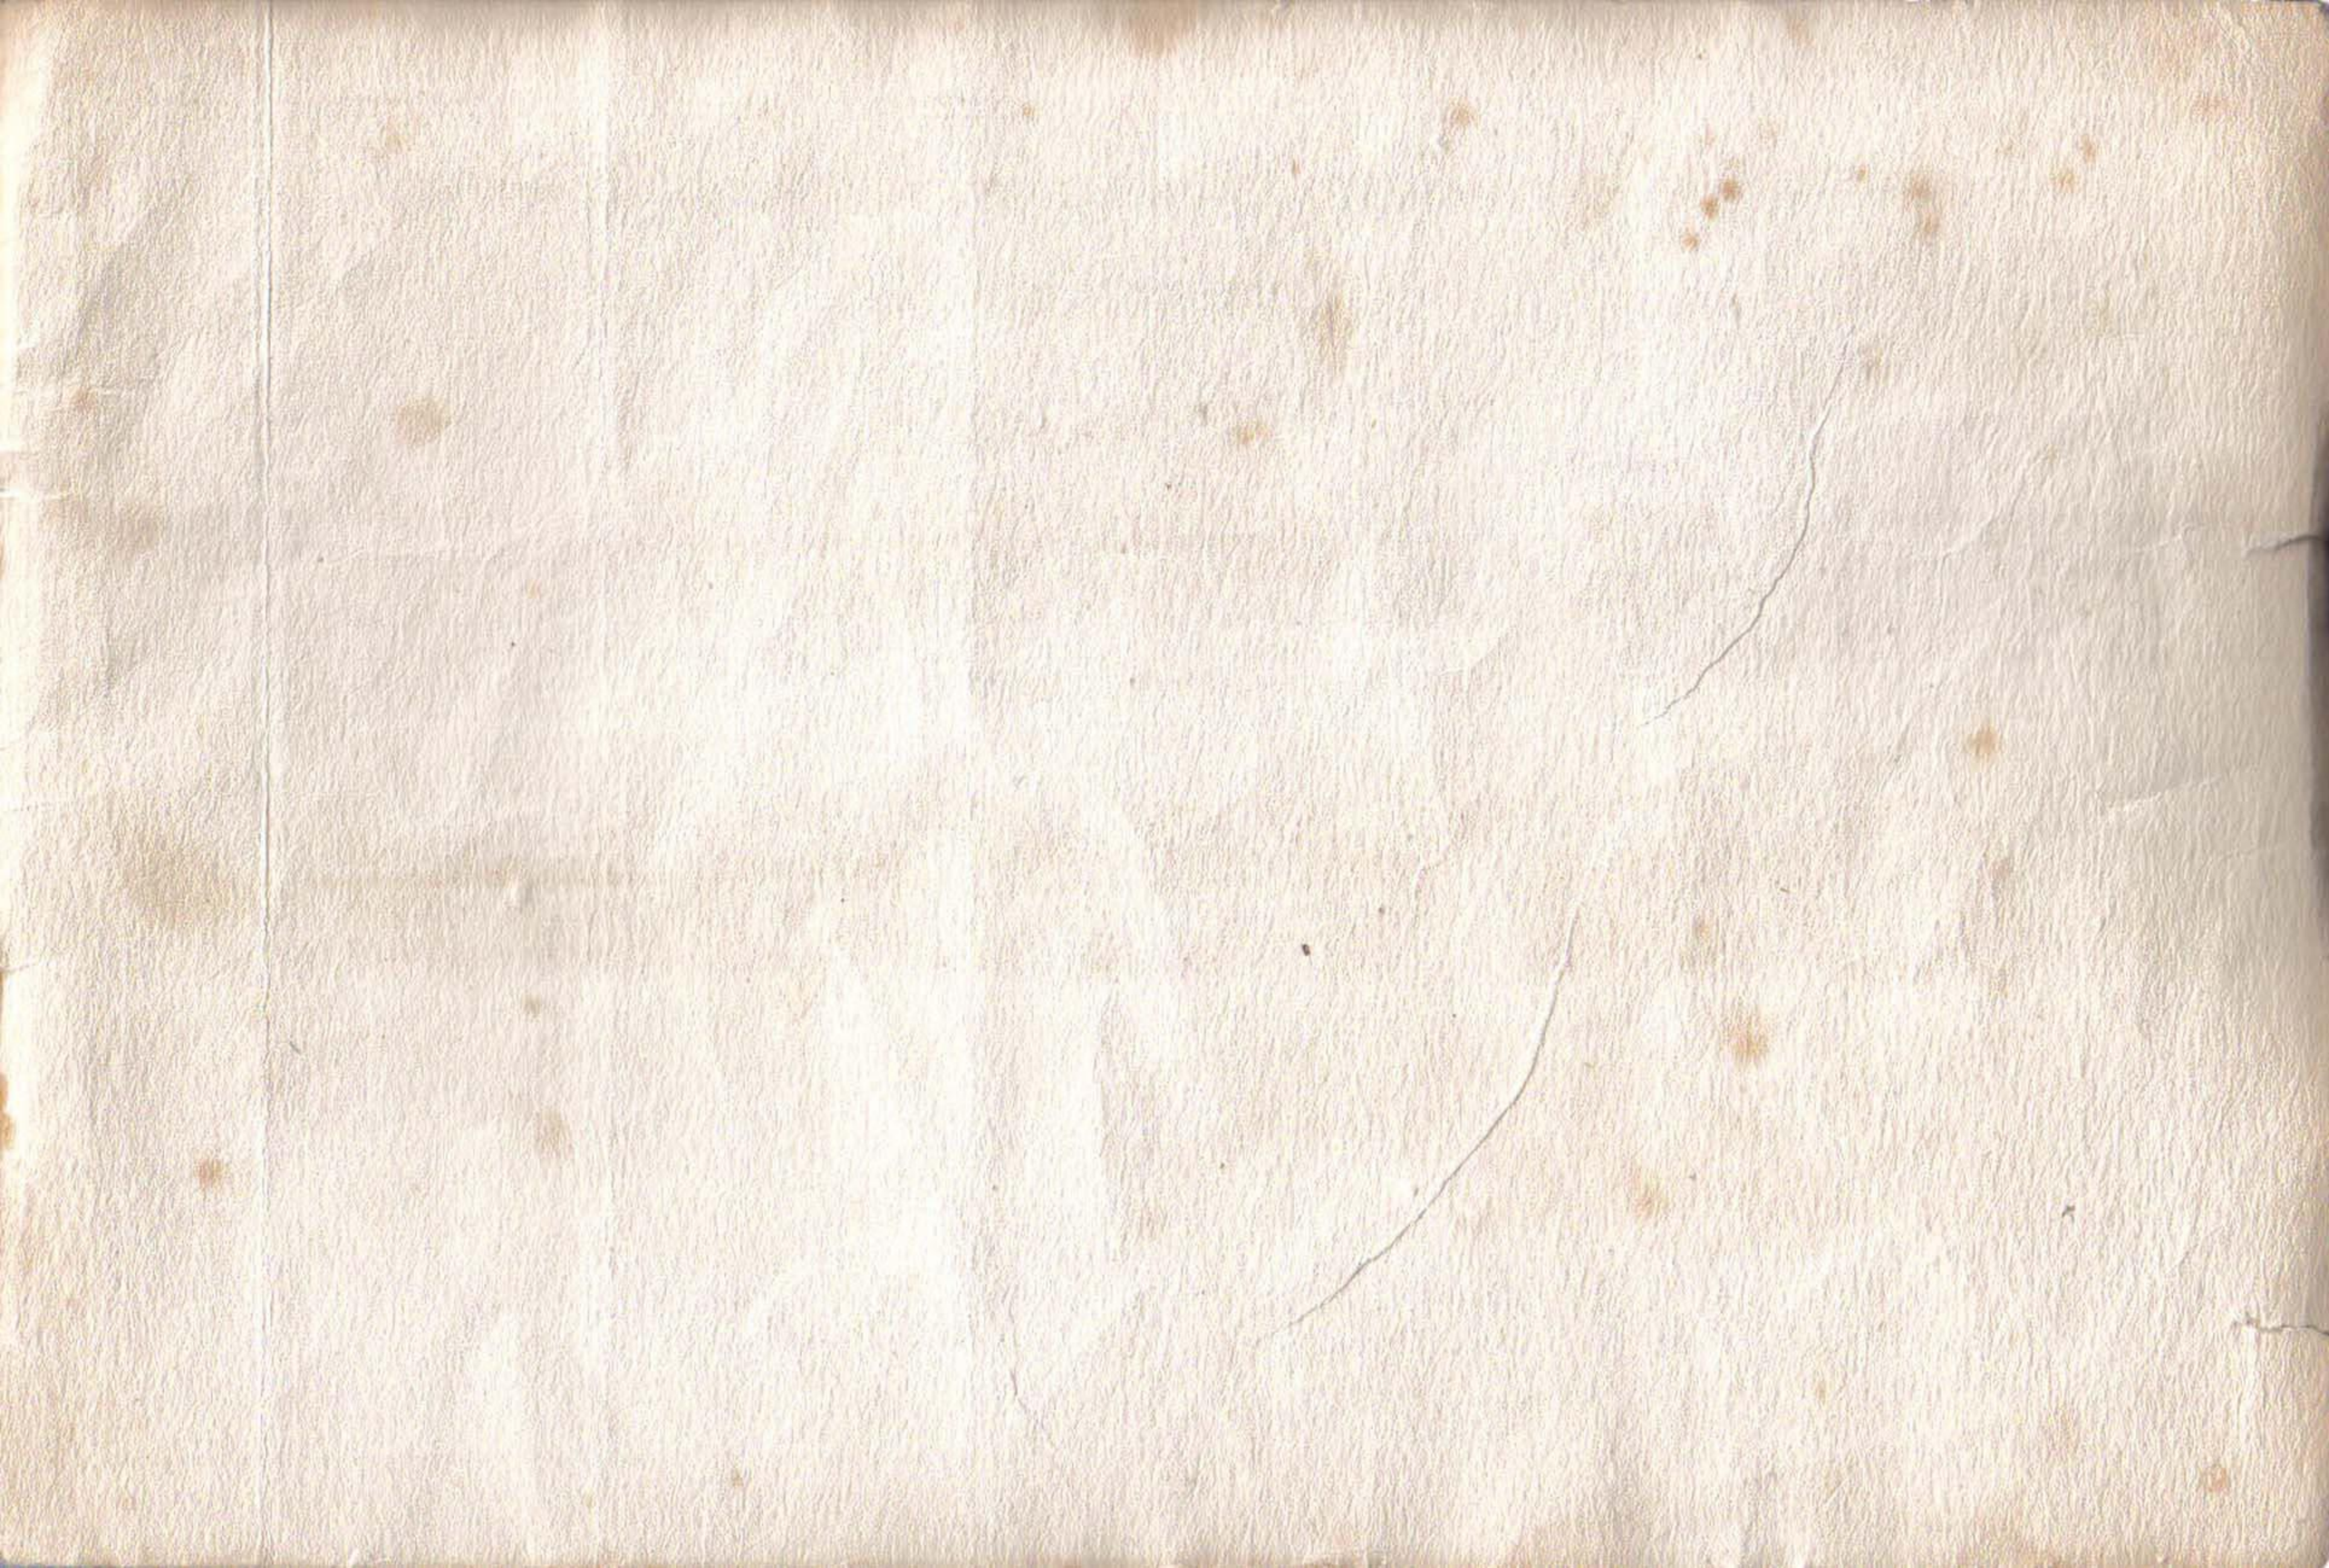

MECCANO

Hornby's Original System, First Patented 1901

PATENTS & DESIGNS,
GREAT BRITAIN:

671,790
671,534
671,484
671,485
671,212

154,130
153,234
145,357
139,125
116,370

648,958
617,509
577,272
577,207

4,564/15
4,183/14
3,869/14
22,962/13
20,535/13
21,117/12

PATENTED THROUGHOUT THE WORLD

To Meccano Boys

YOUR Meccano Outfit contains a number of accurately made and finished engineering parts, which enable you to duplicate any and every movement known to mechanism.

The value of a constructional system does not lie in the number of parts which it contains, but entirely in the uses to which the various parts can be put. Meccano will do more than all other constructional toys put together, and no other system will do the same as Meccano. Every other metal constructional toy is an imitation of Meccano, which was the first toy of its kind. *The genius and knowledge and experience are in the Meccano parts.*

Meccano is sold as a children's toy, to give them fun, interest them, and instruct them in the fascinating wonders of engineering, but every day sees a fresh use for it. Engineers and architects use it for designing models and inventing movements. Professors and teachers in technical schools use it to demonstrate mechanical principles to their students. We have received enthusiastic letters from inventors who have designed practical commercial machines with Meccano parts for weaving and other purposes. It is largely used in institutions for the blind, for teaching patients, and in very many children's hospitals it brings happiness and relief to thousands of afflicted ones.

There is no hard work attached to building Meccano models. All the work and thought have been put into the parts when they were designed, and all you have to do is to follow the instructions, and screw the parts together.

Bright boys are inventing new Meccano models every day, and sending them in to win prizes in our big competitions. These new models will be included in subsequent editions of our Manuals which we shall publish from time to time, and for which you should look out and secure as they are published.

MECCANO MAGAZINE.—This is the Meccano boys' newspaper, published solely for them, to help them to get all the pleasure possible from building models. It contains illustrations of new prize models, articles on mechanical and electrical subjects, boys' correspondence and replies by the Editor, announcements of new model-building and essay competitions, etc. It is also the official organ of the Meccano Guild. It may be purchased from regular Meccano dealers at 1d. per copy, or we will send you a copy regularly on receipt of 6d for the next six issues, or 1/- for the next 12.

MECCANO GUILD.—This is a great boys' movement which every possessor of a Meccano Outfit should join. All its members wear a special badge and recognise each other as friends. Guild members form Meccano Clubs in different centres, and there are hundreds of these Clubs throughout the country holding meetings, exhibitions, lectures, concerts, etc., every week. They have wonderful times together and enjoy themselves as no other boys can. The Guild Secretary, Meccano Works, Liverpool, will mail you full particulars on request.


MECCANO PRIZE COMPETITIONS

MONEY AND FAME FOR MECCANO BOYS.—Each year there is a big Meccano Prize Competition, in which we offer big prizes in money, and new Meccano Outfits to clever boys who are able to design new models. Send your own ideas in, and get your share of the prize money. Be sure to ask your dealer for full particulars and entry forms. If you have any difficulty send us a postcard, and we will see that you get what you want. There are no entrance fees or restrictions of any kind.

IMPORTANT NOTICE.—In some of the models throughout this Manual we have made use of the Meccano Braced Girder, large wheels, sprocket wheels and chain, etc., which are only supplied in the Inventor's Accessory Outfits, or as separate parts. We have employed these parts, as they improve the appearance and working of the models, and they also form a suggestion for the use of the Inventor's Accessory Outfits, but in every case the same models may be effectively built with the parts contained in the regular Meccano Outfits.

These Models Can be Made with MECCANO Outfit No. 1


Types of Trucks and Luggage Carts



Model No. 1

Parts Required:

3 of No. 5	1 of No. 15
2 " " 10	2 " " 22
2 " " 12	8 " " 37
1 of No. 52	

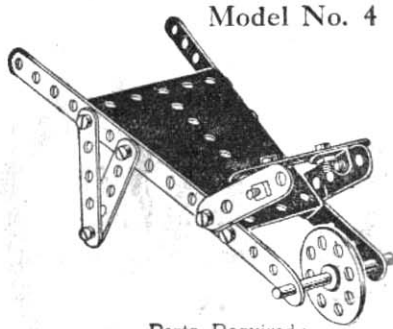

Model No. 4


Parts Required:

2 of No. 2	1 of No. 24
9 " " 5	2 " " 35
2 " " 12	14 " " 37
1 " " 17	1 " " 54

Model No. 6

Parts Required:

4 of No. 2
4 " " 5
4 " " 60
2 " " 15A
4 " " 22
12 " " 37
1 " " 52




Model No. 2


Parts

Required:

4 of No. 5
4 " " 60
2 " " 15A
4 " " 22
12 " " 37
1 " " 52



See Notice page 3


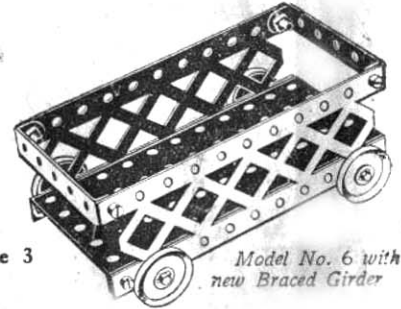


Model No. 6 with new Braced Girder

Model No. 3

Parts Required:

3 of No. 2
8 " " 5
2 " " 60
4 " " 10
2 " " 12
2 " " 15A
4 " " 22
20 " " 37
1 " " 52




Model No. 5

Parts Required:

4 of No. 2	4 of No. 22
4 " " 5	20 " " 37
4 " " 60	1 " " 52
2 " " 15A	

Model No. 7

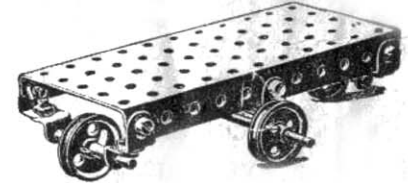


Parts Required:

2 of No. 10	2 of No. 22A
8 " " 12	4 " " 35
1 " " 15A	10 " " 37
2 " " 17	1 " " 52
2 " " 22	



Fig. 7A

Model No. 8




Parts Required:

2 of No. 2	1 of No. 24
4 " " 5	9 " " 37
1 " " 15A	4 " " 35
2 " " 17	1 " " 44
2 " " 22	1 " " 52
	2 of No. 60

Types of Trucks and Luggage Carts (continued)

Model No. 11

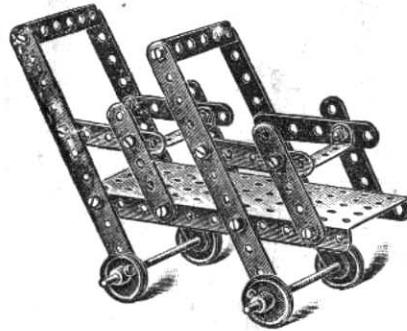


Parts Required:

4 of No. 2
8 " " 5
2 " " 15A
4 " " 22
20 " " 37
1 " " 52
4 " " 60


Model No. 13

Parts Required:

2 of No. 15A
4 " " 22
1 " " 52



Model No. 9

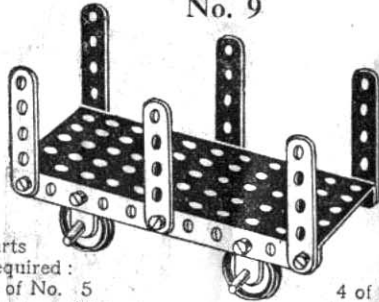


Parts Required:

6 of No. 5
4 " " 10
2 " " 15A

4 of No. 22
10 " " 37
1 " " 52


Model No. 14

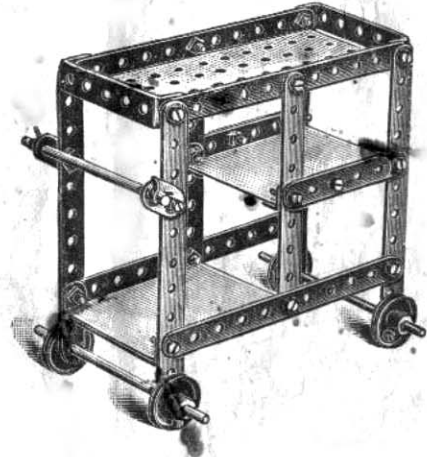

Parts Required:

6 of No. 2
8 " " 5
2 " " 10
4 " " 12
3 " " 15A
4 " " 22
2 " " 35
20 " " 37
1 " " 52
4 " " 60

Model No. 12

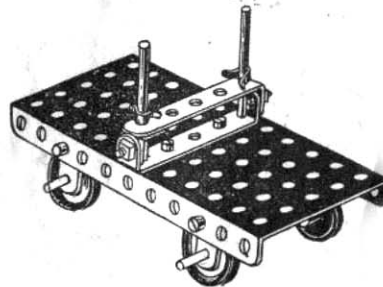


Parts Required:

4 of No. 22
2 " " 35
4 of No. 10
8 " " 37
2 " " 15A
1 " " 52
2 " " 17
2 " " 60

Model No. 10

Parts Required:

2 of No. 2
8 " " 5
1 " " 15A
2 " " 22
10 " " 37
1 " " 52
1 " " 60

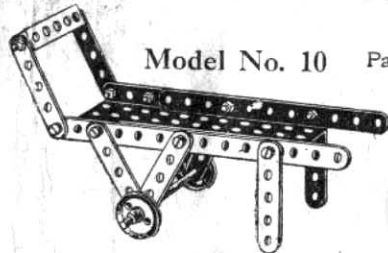


The two lower platforms are constructed out of pieces of ordinary cardboard, their outer edges resting on 2 1/2" bent strips and their inner edges on angle brackets.



Model No. 15
Swing


Parts Required:

4 of No. 1
1 " " 2
6 " " 5
4 " " 12
12 " " 37
1 " " 52
3 " " 60

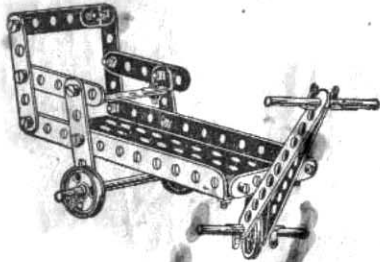

Model No. 16 Bath Chair

2 of No. 2	4 of No. 35
6 " " 5	14 " " 37
1 " " 15A	1 " " 44
2 " " 17	1 " " 52
3 " " 22	3 " " 60

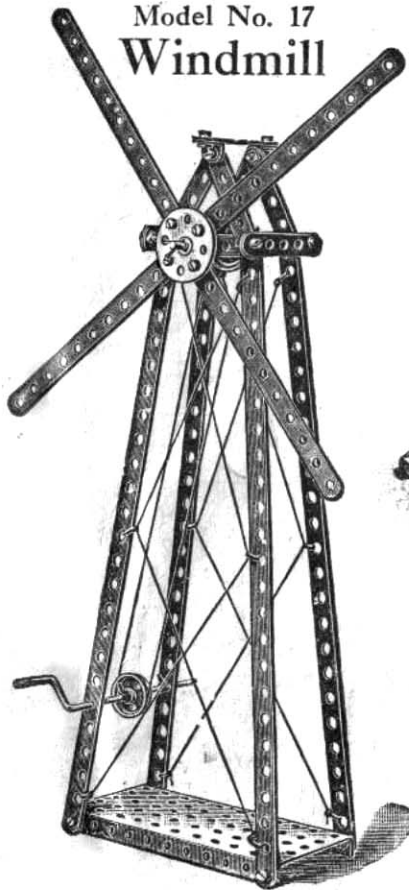

Model No. 17
Windmill


Parts Required:

4 of No. 1	1 of No. 15A	4 of No. 35
4 " " 2	1 " " 19	20 " " 37
7 " " 5	2 " " 22	1 " " 52
2 " " 12	1 " " 24	2 " " 60


Model No. 18
Well Windlass

Parts Required:

2 of No. 2
8 " " 5
4 " " 12
1 " " 19
2 " " 22
12 " " 37



Model No. 19

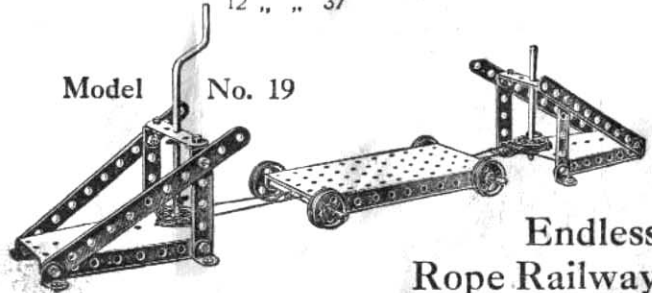

Endless
Rope Railway


Parts Required:

4 of No. 2	1 of No. 19	12 of No. 37
4 " " 5	4 " " 22	1 " " 52
8 " " 12	2 " " 22A	2 " " 54
3 " " 15A	4 " " 35	2 " " 60

Model No. 20 Seesaw

Parts Required:

4 of No. 2	2 of No. 35
6 " " 5	19 " " 37
6 " " 12	1 " " 44
1 " " 17	1 " " 52

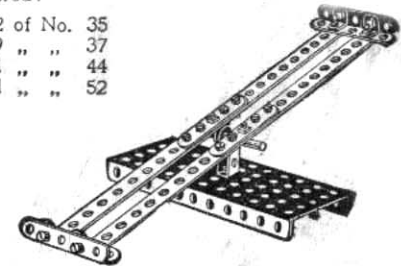


Model No. 21

Travelling Ladder

Parts Required:

- 6 of No. 2
- 4 " " 5
- 2 " " 15A
- 4 " " 22
- 16 " " 37
- 1 " " 52
- 4 " " 60

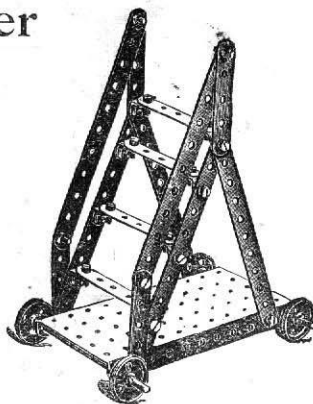


Model No. 22

Step Ladder

Parts Required:


- | | |
|------------|-------------|
| 4 of No. 2 | 2 of No. 12 |
| 3 " " 5 | 12 " " 37 |
| | 4 " " 60 |

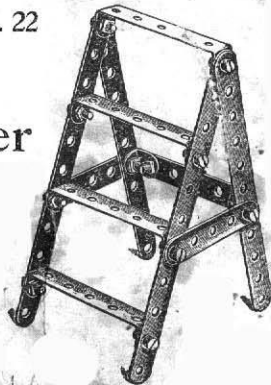

Model No. 23 Telpher Span

Parts Required:

- | | | |
|------------|-------------|--------------|
| 2 of No. 1 | 1 of No. 17 | 20 of No. 37 |
| 2 " " 2 | 1 " " 19 | 1 " " 44 |
| 6 " " 5 | 3 " " 22 | 1 " " 52 |
| 4 " " 12 | 2 " " 22A | 2 " " 54 |
| 2 " " 15A | 6 " " 35 | 3 " " 60 |

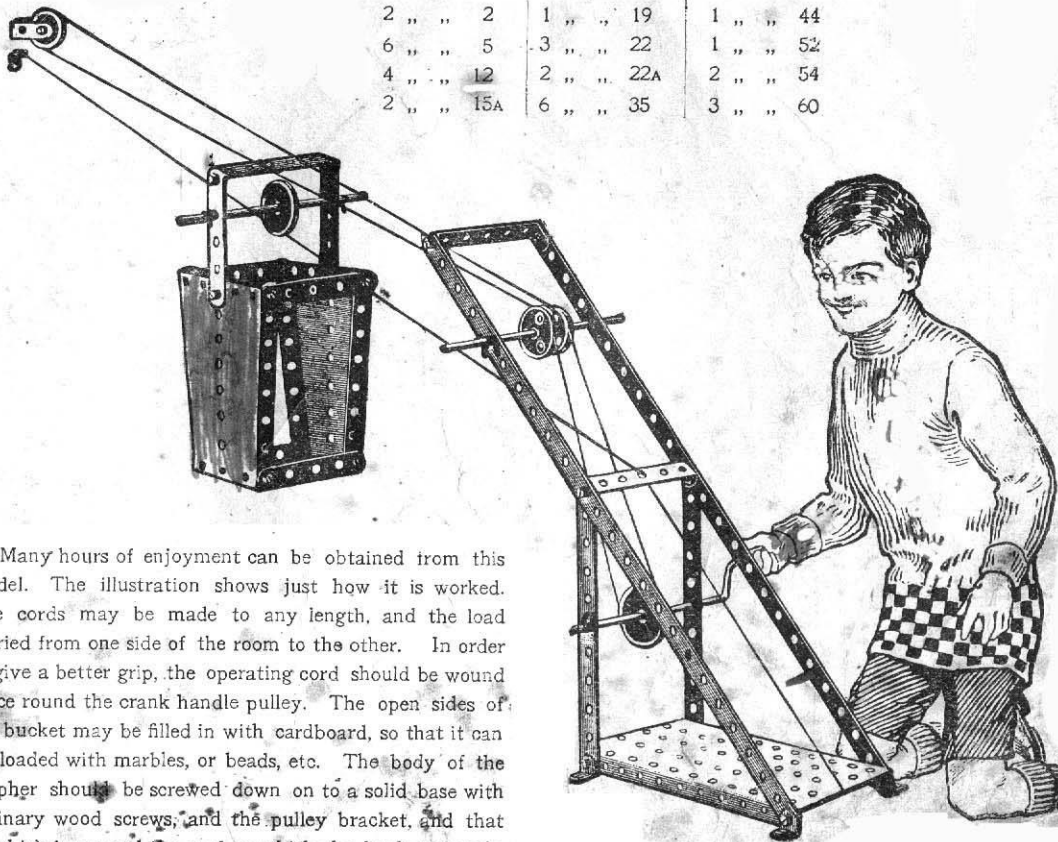


Many hours of enjoyment can be obtained from this model. The illustration shows just how it is worked. The cords may be made to any length, and the load carried from one side of the room to the other. In order to give a better grip, the operating cord should be wound twice round the crank handle pulley. The open sides of the bucket may be filled in with cardboard, so that it can be loaded with marbles, or beads, etc. The body of the Telpher should be screwed down on to a solid base with ordinary wood screws, and the pulley bracket, and that to which is secured the cord on which the bucket travels, are screwed in a suitable position on the opposite side of the room.

Model No. 24 Travelling Jib Crane

Parts Required:

2 of No.	1
3 " "	2
2 " "	5
2 " "	15A
1 " "	17
1 " "	19
4 " "	22
2 " "	22A
1 " "	24
5 " "	35
15 " "	37
1 " "	52
1 " "	54
1 " "	57
1 " "	60

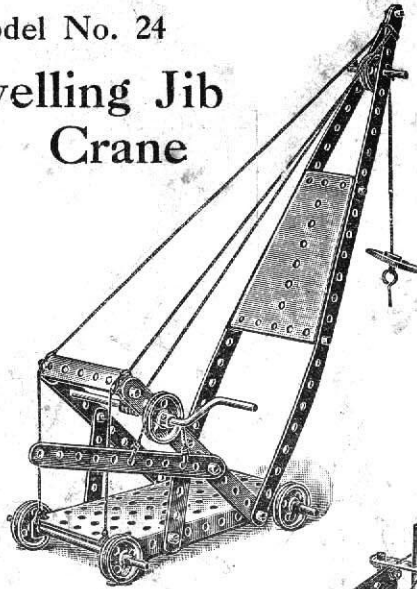


Types of Cranes

Model No. 25 Jib Crane

Parts Required:


4 of No.	1	4 of No.	35
6 " "	2	20 " "	37
1 " "	3	1 " "	52
1 " "	11	2 " "	54
2 " "	12	1 " "	57
1 " "	15A	2 " "	60
2 " "	17		
1 " "	19		
4 " "	22		
2 " "	22A		
1 " "	24		

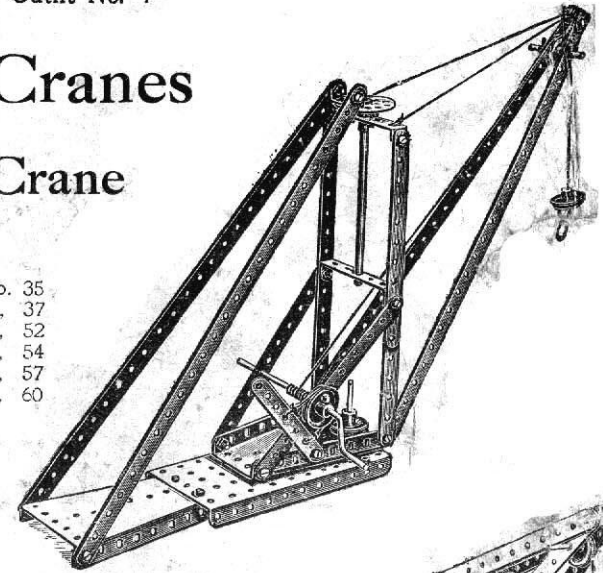

Model No. 26 Overhead Crane

Parts Required:

2 of No.	1	2 of No.	22A
6 " "	2	1 " "	24
9 " "	5	6 " "	35
4 " "	10	20 " "	37
4 " "	12	1 " "	44
3 " "	15	1 " "	52
1 " "	17	2 " "	54
1 " "	19	1 " "	57
4 " "	22	2 " "	60

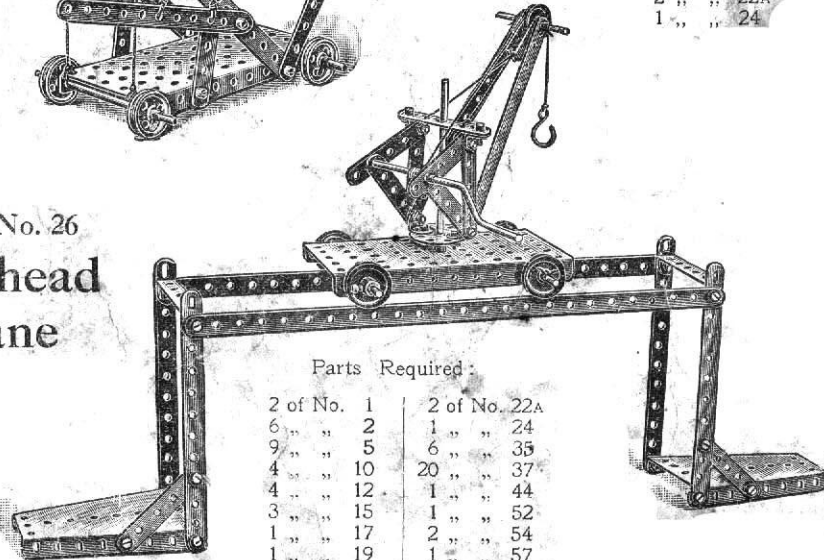


Model No. 27 Swivelling Crane

Parts Required:

2 of No.	1	2 of No.	22A
6 " "	2	1 " "	24
1 " "	3	4 " "	35
4 " "	5	18 " "	37
1 " "	11	1 " "	44
1 " "	15A	1 " "	52
2 " "	17	2 " "	54
1 " "	19	1 " "	57
4 " "	22	3 " "	60

The hoisting cord after passing over the pulley at the end of the jib, passes over a pulley running in a cranked bent strip secured by a nut and bolt to the 2 1/2" bent strip at the back of the jib.

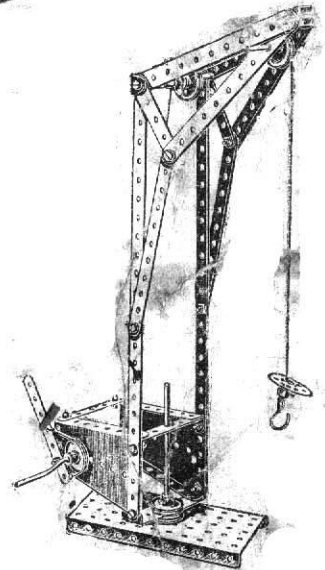

Model No. 28

Swivelling Jib Crane





Fig. 28A

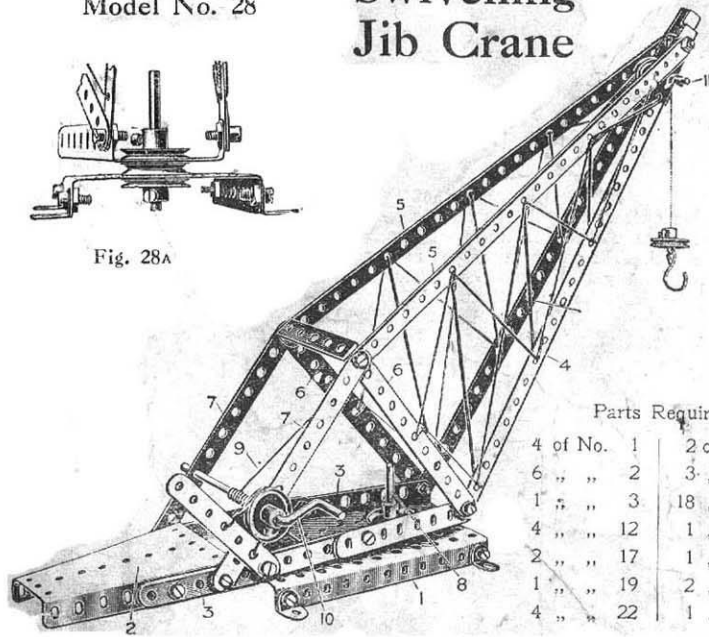


Parts Required:

4 of No. 1	2 of No. 22A
6 " " 2	3 " " 35
1 " " 3	18 " " 37
4 " " 12	1 " " 44
2 " " 17	1 " " 52
1 " " 19	2 " " 54
4 " " 22	1 " " 60

The fixed base of this Crane is a perforated flanged plate 1, and the swivelling base of the Crane is formed by two sector plates 2 and 3. The jib is formed from two 12½" strips 4 bolted to the ends of the sector plate 3, two other 12½" strips 5 being bolted to the top of the strips 4 and to cross strips 6, the outer ends of these latter strips being stayed by strips 7 bolted to the other sector plate. The upper structure of the Crane swivels about a rod 8, and is secured as shown in Fig. 28A. The winding rope 9 is operated by the crank handle 10 and passes over a pulley in the head of the Crane on a short rod 11.

Model No. 29 Turntable Gangway

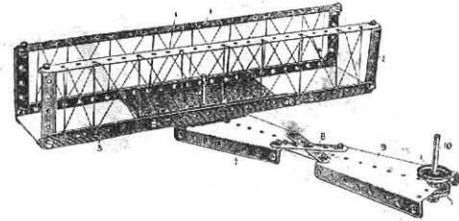

Parts Required:

4 of No. 1	19 of No. 37
2 " " 5	1 " " 52
2 " " 17	2 " " 54
3 " " 22	4 " " 60
1 " " 24	


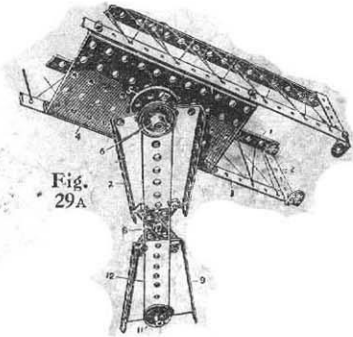


Fig. 29A

The side frames of the gangway are made of 12½" strips 1 bolted by means of 2½" bent strips 2 to lower strips 3, the strips 3 and 1 being set at right angles to each other, and the side frames being connected by a perforated flanged plate 4. A bush wheel 5 is bolted to the underside of the flanged plate and fitted with a rod on which is mounted a 1" pulley 6, the rod passing through one of the end holes of a sector plate 7. This sector plate 7 is connected by diagonal strips 8 to another sector plate 9, through the end hole of which a rod 10 is threaded carrying two 1" pulleys 11. An operating cord 12 passes from the pulley 11 to the pulley 6. In this way the gangway may be rotated by operating the spindle 10.

Types of Railway Signals

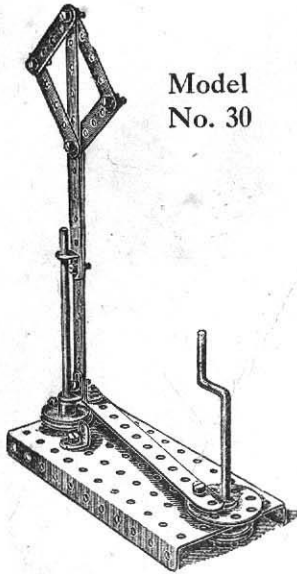

Model No. 30


Parts Required:

3 of No. 2	3 of No. 22
4 " " 5	1 " " 24
4 " " 12	14 " " 37
1 " " 15A	1 " " 52
1 " " 19	

Model No. 33
Scales

Parts Required:

4 of No. 2	2 of No. 22A
8 " " 5	4 " " 35
1 " " 11	19 " " 37
2 " " 12	1 " " 52
2 " " 17	2 " " 54

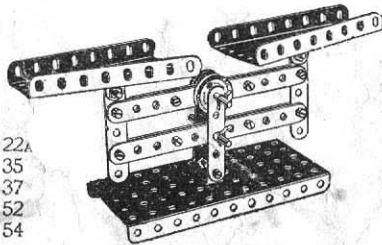


Model No. 31

In fixing the lever to the lower end of the sector plate, lock the nuts, so as to prevent the screw from working out.


Parts Required:

2 of No. 1
2 " " 2
1 " " 3
4 " " 12
1 " " 17
2 " " 22
19 " " 37
2 " " 35
1 " " 52
1 " " 54



Model No. 34

The scale beam of this model is pivoted in a slot at the top of the upright standard. This slot is formed by bolting a 2 1/2 in. strip to the standard, nuts being placed between the strip and the standard before screwing up. These nuts hold the strip and the standard at the required distance apart to give the beam, free play.

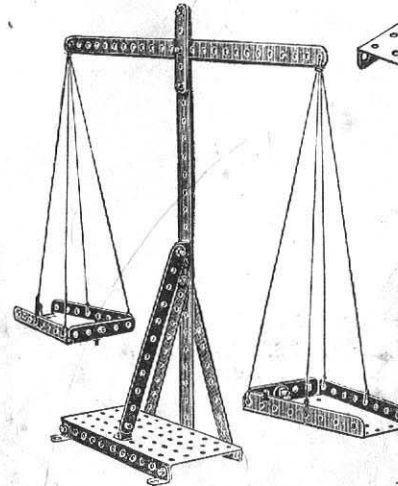


Model No. 32

Parts Required:

3 of No. 2	1 of No. 22
9 " " 5	1 " " 35
1 " " 11	16 " " 37
1 " " 17	1 " " 52

The two outside signals of this Model are operated by the levers pivoted to the upright, and the centre signal by the pulley wheel. The cord operating this latter signal is securely tied round the pulley wheel so that when the wheel is turned the signal is raised or lowered.

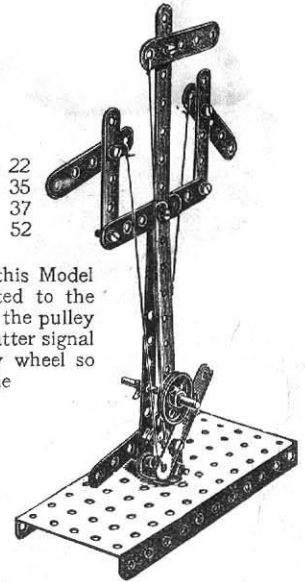

Scales





Fig. 34A

Parts Required:

2 of No. 1	19 of No. 37
3 " " 2	1 " " 52
1 " " 5	2 " " 54
4 " " 12	2 " " 60

Model No. 35 Joy Wheel

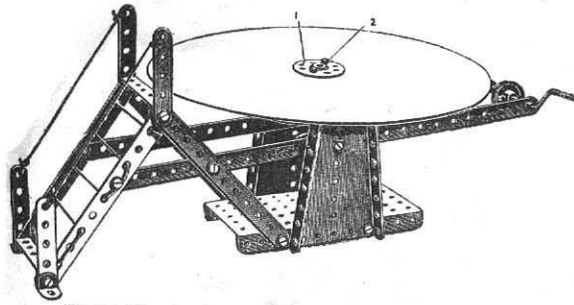

Parts Required:

2 of No. 1	3 of No. 22
4 " " 2	1 " " 24
4 " " 5	3 " " 35
2 " " 12	20 " " 37
1 " " 15A	1 " " 52
1 " " 19	2 " " 54
	3 " " 60

The driving mechanism and construction of the framework of this model are clearly brought out in Fig. 35A. Cut out a circular piece of card-board, 8" in diameter, and in the centre of the disc fix a bush wheel 1 by nuts and bolts 2. The eye of the bush wheel is then threaded over the top of the vertical spindle 3, and secured by its set-screw. The rotating table is cut out of a piece of ordinary card-board.


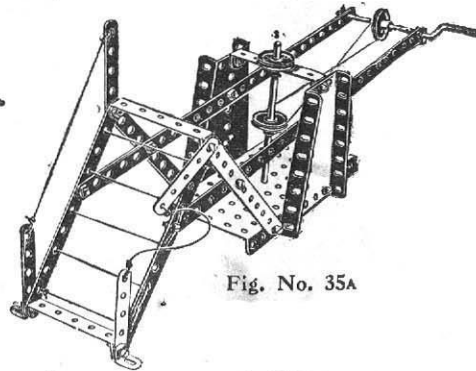


Fig. No. 35A

Model No. 36 Go Chair

Parts Required:

2 of No. 2
7 " " 5
2 " " 15A
4 " " 22
13 " " 37
2 " " 60

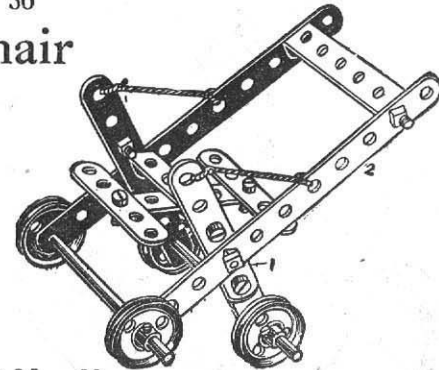

Model No. 38

Cot on Wheels

Parts Required:

4 of No. 2	4 of No. 22
6 " " 5	17 " " 37
2 " " 12	3 " " 60

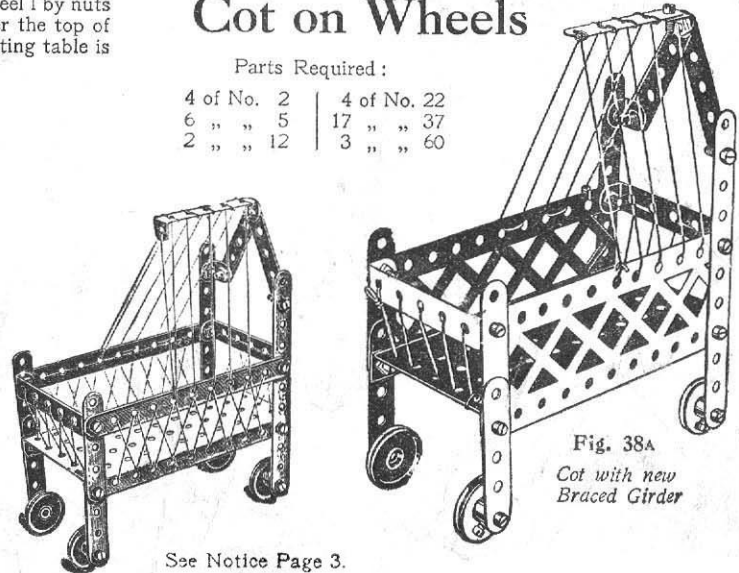



Fig. 38A
Cot with new
Braced Girder

Parts Required:

4 of No. 1
4 " " 2
6 " " 5
4 " " 10
2 " " 15A
1 " " 17
1 " " 19
3 " " 22
1 " " 24
5 " " 35
20 " " 37
1 " " 52
2 " " 54
4 " " 60

Model No. 37

Roundabout

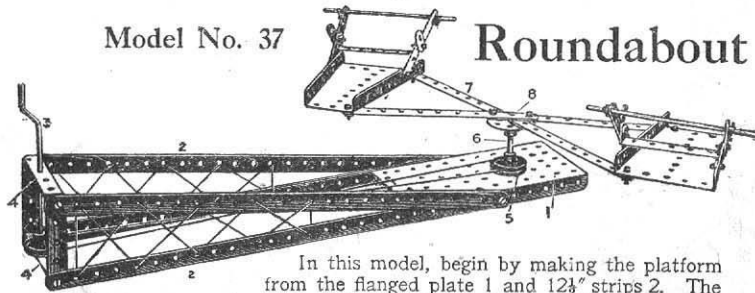


In this model, begin by making the platform from the flanged plate 1 and 12½" strips 2. The bearings of the crank handle 3 are formed in 2½" bent strips 4. The drive from the pulley on the crank is taken to a 1" pulley 5, fast on the spindle 6, another similar pulley being secured to the spindle beneath the flanged plate. The arms 7, formed of four 5½" strips, are bolted to a bush wheel 8 fast on the spindle 6.

See Notice Page 3.


Model No. 39 Snow Plough

Fig. No. 39A




Parts Required :

6 of No. 2	2 of No. 22A
3 " " 5	1 " " 24
2 " " 60	4 " " 35
2 " " 10	19 " " 37
1 " " 12	1 " " 44
3 " " 15A	1 " " 52
1 " " 17	2 " " 54
4 " " 22	

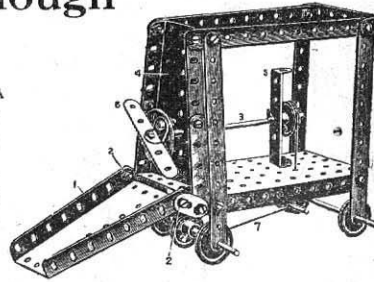

The construction of the framework of this Model presents no difficulty. The sector plate 1 forming the plough is loosely pivoted on the bolts 2. The axle 3 is mounted in the front sector plate 4 and the 2½" bent strip 5. A 2½" strip 6 is bolted by angle brackets to a bush wheel on the front of the axle and forms a dispersing propeller for the snow after it rises up the inclined sector plate 1. A continuous cord 7 is passed round a 1" pulley wheel 8 and round a short axle 9 and a 1" pulley wheel on the propeller axle. In this way, as the plough is moved along the track, the propeller is revolved.

Model No. 40 Motor Cart

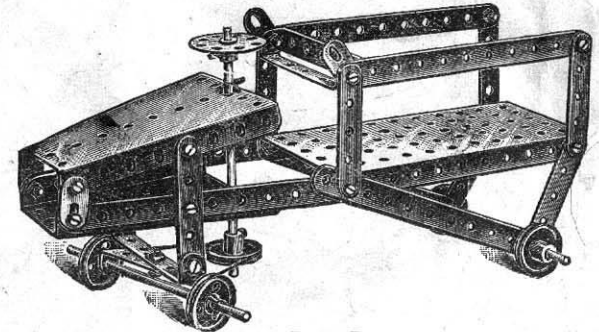


Parts Required :

6 of No. 2	1 of No. 24
8 " " 5	3 " " 35
4 " " 10	20 " " 37
3 " " 15A	1 " " 52
3 " " 22	2 " " 54
2 " " 22A	4 " " 60


Model No. 41

Monoplane

Fig. No. 41A

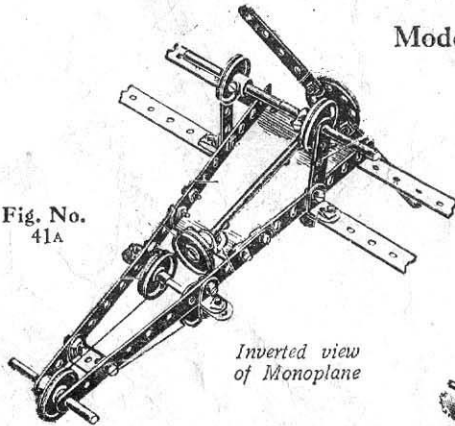


Inverted view of Monoplane

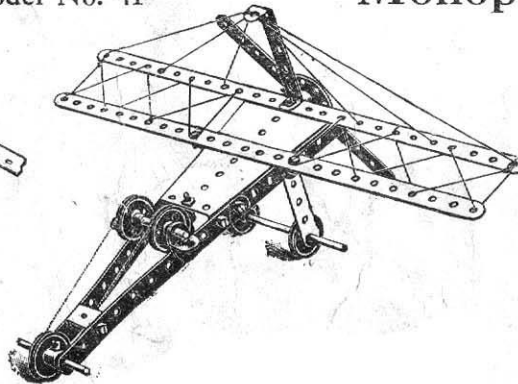

Parts Required :


2 of No. 1
2 " " 2
4 " " 5
1 " " 11
8 " " 12
2 " " 15A
1 " " 17
4 " " 22
2 " " 22A
1 " " 24
2 " " 35
18 " " 37
1 " " 54
1 " " 60

Fig. No. 41B

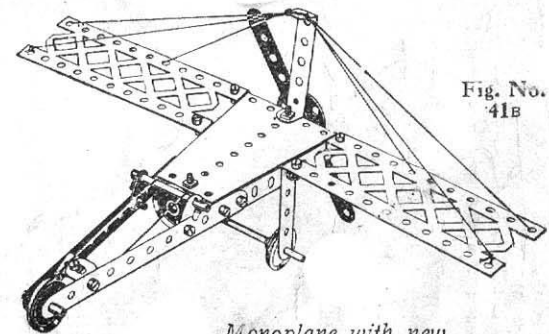

Monoplane with new Meccano Braced Girder


Model No. 42
Drilling Machine

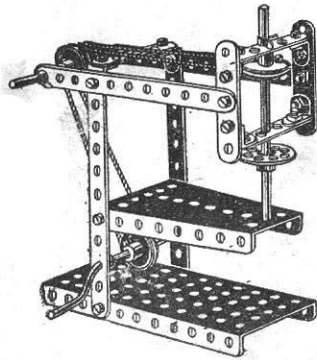

Parts Required:

4 of No.	2
5	5
6	12
2	15A
1	19
4	22
4	24
1	35
18	37
1	52
1	54


Model No. 43
Pit Headgear

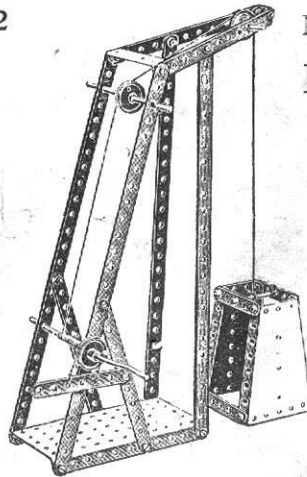

Parts Required:

4 of No.	1
4	2
1	3
4	5
1	11
1	15A
1	17
1	19
2	22
3	35
24	37
1	52
2	54

Model No. 44
Hoisting Block

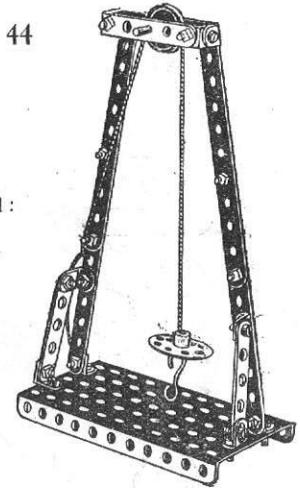


Parts Required:

4 of No.	2
3	5
8	12
1	17
1	22
1	24
22	37
1	52
1	57
1	60


Model No. 45
Churn

Parts Required:

6 of No.	2
4	5
2	12
2	15
1	19
2	22
2	22A
1	24
5	35
19	37
1	52
2	54
3	60

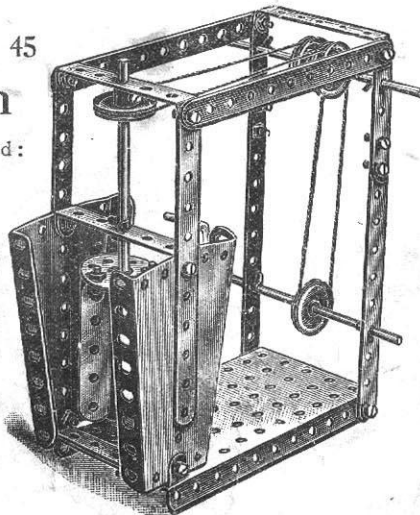


Model No. 46 Potter's Wheel

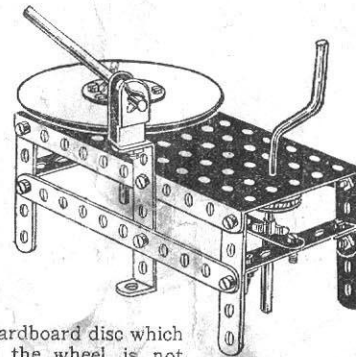

The cardboard disc which forms the wheel is not provided in the outfit.

Parts Required:

2 of No.	2
4	5
1	15A
1	17
1	19
2	22
1	24
3	35
16	37
1	44
1	52
3	60




Under View of Potter's Wheel

Fig. 46A

These Models Can be Made with MECCANO Outfit No. 1

Model No. 47

Torpedo Destroyer

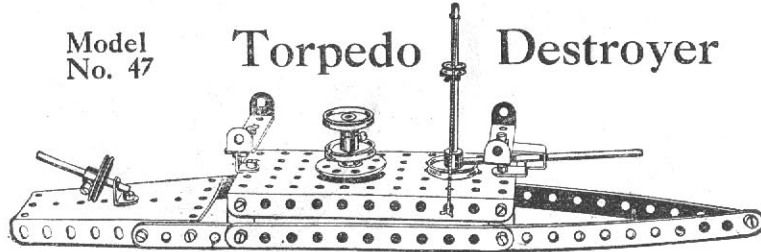


Parts Required :	4 of No. 2	1 of No. 17	19 of No. 37
	2 " " 5	4 " " 22	1 " " 44
	4 " " 10	1 " " 23	1 " " 52
	1 " " 11	1 " " 24	1 " " 54
	1 " " 12	3 " " 35	2 " " 60
	2 " " 15A		

Model No. 48

Drop Stamp

Parts Required :


4 of No. 2	4 of No. 22
7 " " 5	1 " " 24
4 " " 12	2 " " 35
2 " " 15A	20 " " 37
1 " " 19	1 " " 52
	1 " " 60

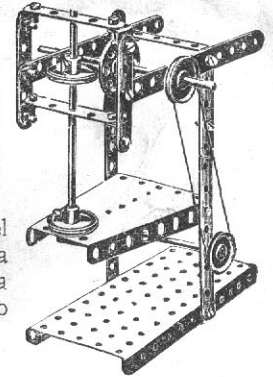

The stamp of this model is raised and dropped by a 2 1/2" strip attached to a bush wheel similar to Model No. 55.

Model No. 49


Tower Wagon

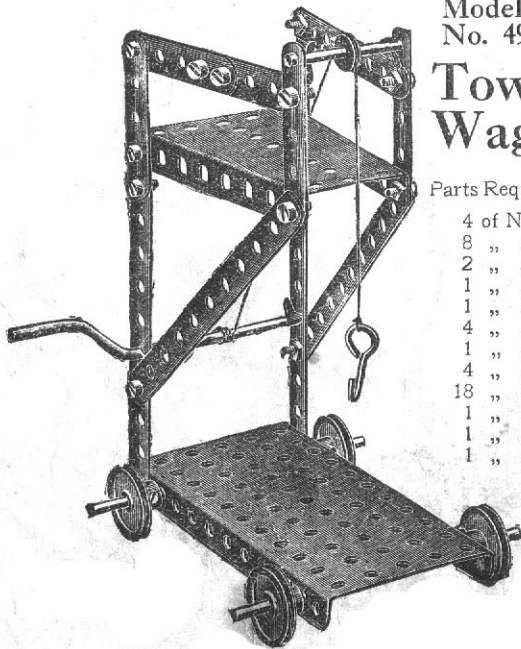

Parts Required :

4 of No. 2
8 " " 5
2 " " 15A
1 " " 17
1 " " 19
4 " " 22
1 " " 23
4 " " 35
18 " " 37
1 " " 52
1 " " 54
1 " " 57

Model No. 50
Automatic Dial Press

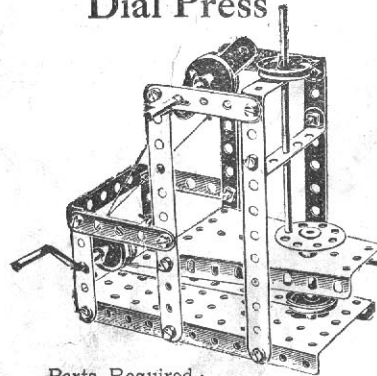

Parts Required :


4 of No. 2	2 of No. 22A
7 " " 5	1 " " 24
2 " " 15A	6 " " 35
1 " " 17	18 " " 37
1 " " 19	1 " " 52
4 " " 22	1 " " 54
	3 " " 60

Model No. 51

Tip Wagon

Parts Required :


1 of No. 2
4 " " 5
5 " " 12
3 " " 15A
4 " " 22
15 " " 37
2 " " 35
1 " " 52
2 " " 54
2 " " 60

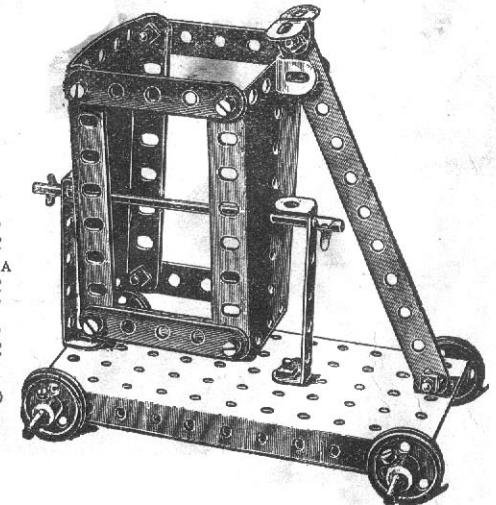


Model No. 52 Polishing Spindle

Parts
Required:


- 1 of No. 2
- 4 " " 5
- 2 " " 10
- 8 " " 12
- 1 " " 15A
- 2 " " 22
- 1 " " 24
- 2 " " 35
- 15 " " 37
- 1 " " 52



Model No. 53 High Level Bridge

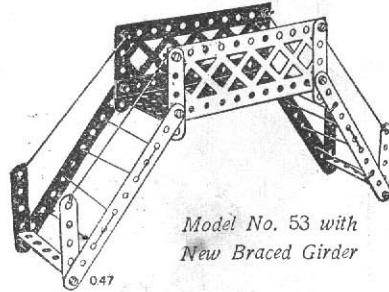

Model No. 53 with
New Braced Girder

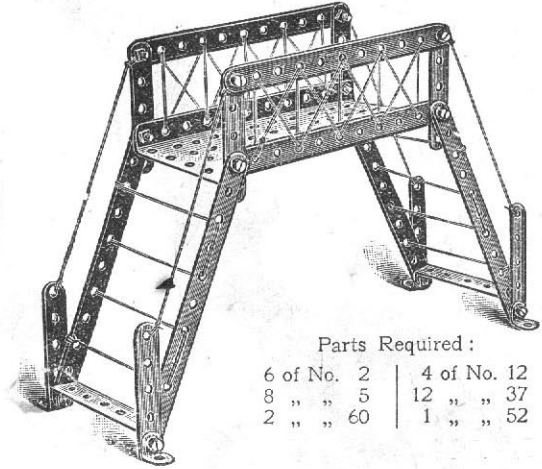


Parts Required:

- | | |
|------------|-------------|
| 6 of No. 2 | 4 of No. 12 |
| 8 " " 5 | 12 " " 37 |
| 2 " " 60 | 1 " " 52 |


Model No. 54 Level Crossing

Parts
Required:

- 3 of No. 2
- 2 " " 5
- 2 " " 12
- 1 " " 17
- 4 " " 22
- 1 " " 24
- 9 " " 37
- 1 " " 52




Model No. 55 Ore Crusher

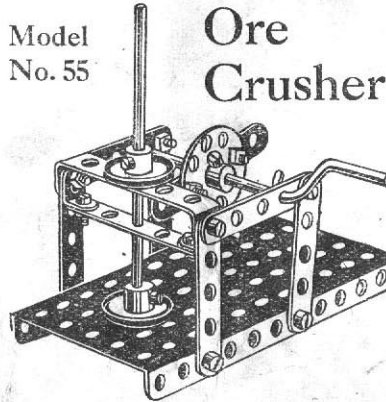

Parts Required:

- | | | |
|------------|-------------|-------------|
| 8 of No. 5 | 1 of No. 19 | 2 of No. 35 |
| 2 " " 12 | 2 " " 22 | 12 " " 37 |
| 1 " " 15A | 1 " " 24 | 1 " " 52 |
| | | 1 " " 60 |

Model No. 56 Buffing Spindle

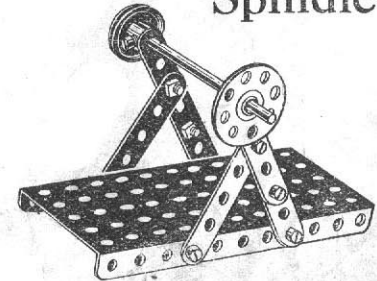


Parts Required:

- | | |
|------------|-------------|
| 6 of No. 5 | 1 of No. 24 |
| 1 " " 15A | 8 " " 37 |
| 1 " " 22 | 1 " " 52 |

Model No. 57 Metal Saw

Parts Required:


4 of No. 2	1 of No. 19
5 " " 5	2 " " 22
1 " " 10	1 " " 24
8 " " 12	2 " " 35
1 " " 17	23 " " 37
1 of No. 52	
2 " " 60	

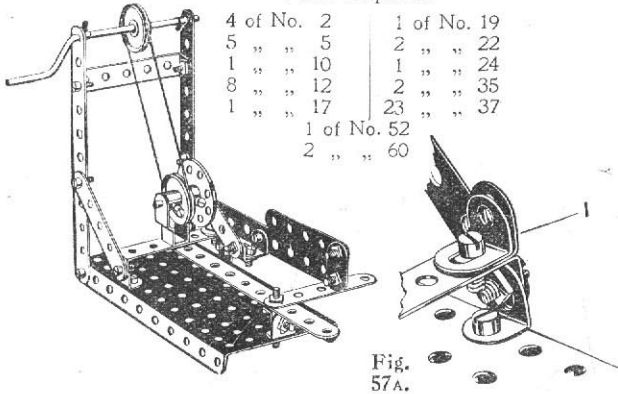

Model No. 58 Coronation Chair

Parts Required:


4 of No. 2	
9 " " 5	
2 " " 10	
2 " " 12	
19 " " 37	
1 " " 52	

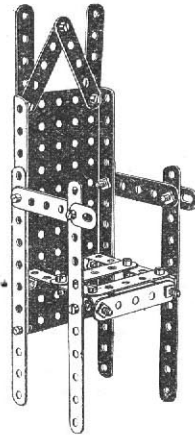


Model No. 59 Gangway

Parts Required:

2 of No. 2	
8 " " 5	
2 " " 10	
1 " " 15A	
1 " " 19	
1 " " 22	
1 " " 22A	
3 " " 35	
8 " " 37	
1 " " 52	
1 " " 54	

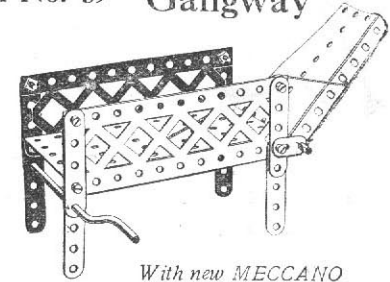


With new MECCANO Braced Girder

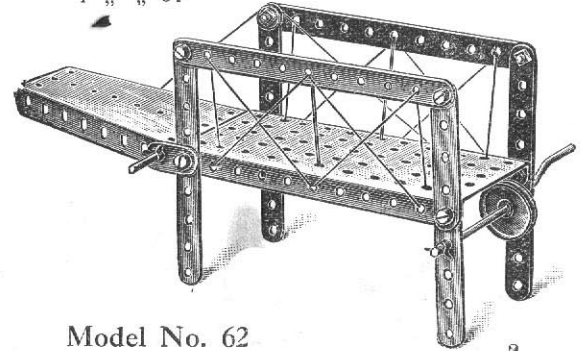

Model No. 60 Lathe

Parts Required:


6 of No. 2	
2 " " 60	
4 " " 12	
1 " " 17	
1 " " 19	
3 " " 22	
1 " " 24	
17 " " 37	
1 " " 44	
1 " " 52	

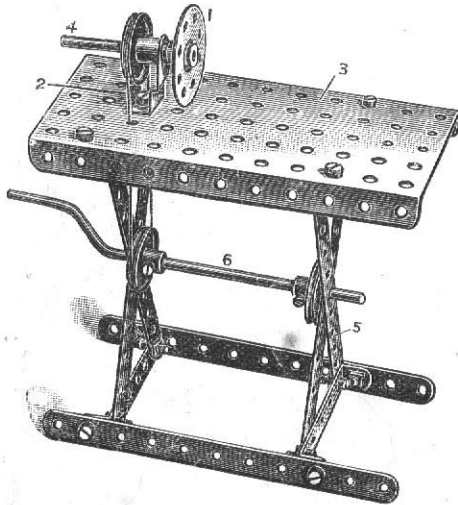

Model No. 61 Buffers

Parts Required:


2 of No. 2	4 of No. 35
2 " " 5	6 " " 37
2 " " 17	1 " " 52
2 " " 22	2 " " 60

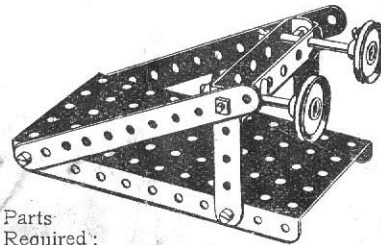

Model No. 62 Stamping Mill


Parts Required:

1 of No. 2	18 of No. 37
1 " " 3	1 " " 52
12 " " 12	2 " " 54
2 " " 15A	
1 " " 19	
4 " " 22	
1 " " 24	
2 " " 35	

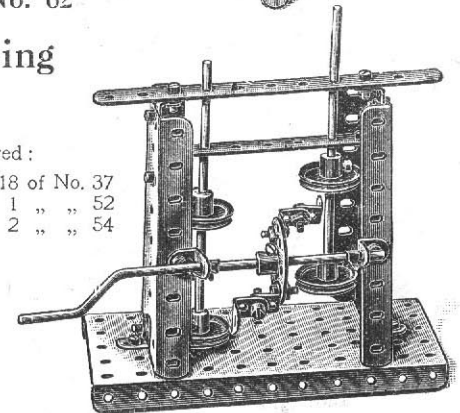


Model No. 63

Ticca Gharry

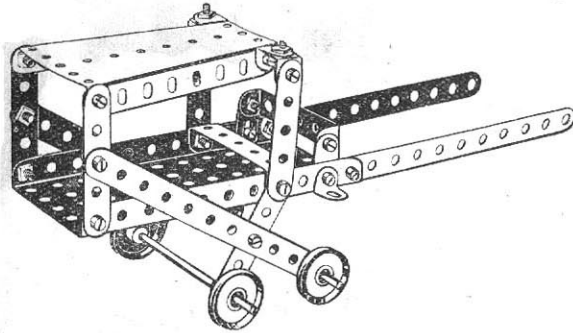

	4 of No. 2	4 of No. 22
Parts	6 " " 5	20 " " 37
Required :	2 " " 10	1 " " 52
	6 " " 12	1 " " 54
	2 " " 15A	2 " " 60

Model No. 66

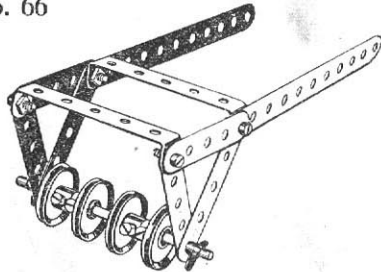


Furrowing Roller

	2 of No. 2	2 of No. 35
Parts	6 " " 5	4 " " 37
Required :	1 " " 15A	2 " " 60
	4 " " 22	

Model No. 64

Sharpshooter Gun

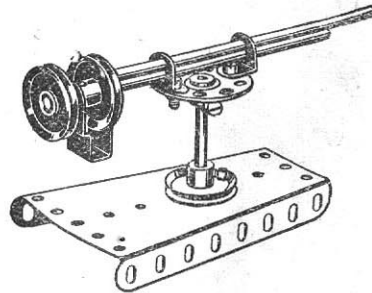


Parts Required :

2 of No. 12
2 " " 15A
1 " " 17
4 " " 22
1 " " 24
2 " " 37
1 " " 44
1 " " 54

Anti-Aircraft Gun

Model No. 67

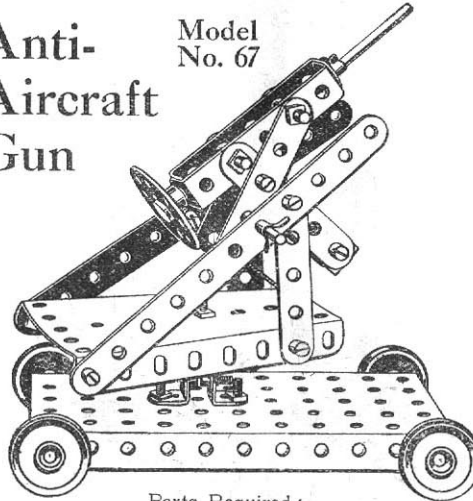


Parts Required :

2 of No. 2	4 of No. 22	1 of No. 44
6 " " 5	1 " " 24	1 " " 52
4 " " 12	5 " " 35	1 " " 54
2 " " 15A	23 " " 37	2 " " 60

Model No. 65

Sleigh



Parts Required :


2 of No. 2
6 " " 5
12 " " 37
1 " " 52

Stamping Machine


Model No. 68

Parts Required :

4 of No. 2
8 " " 5
2 " " 12
2 " " 15A
1 " " 19
4 " " 22
1 " " 24
3 " " 35
20 " " 37
1 " " 52
2 " " 60

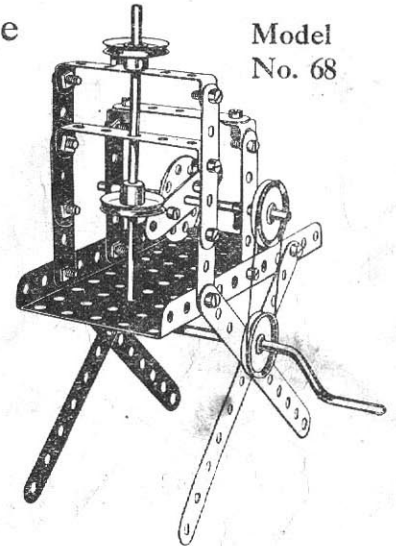


Model No. 69 Timber Drag

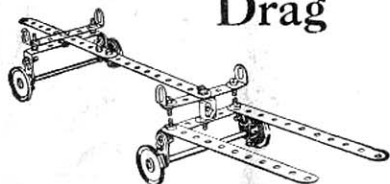

Parts Required:	4 of No. 2	4 of No. 22
	4 " " 10	18 " " 37
	6 " " 12	3 " " 60
	2 " " 15A	

Steering Truck


Model No. 70

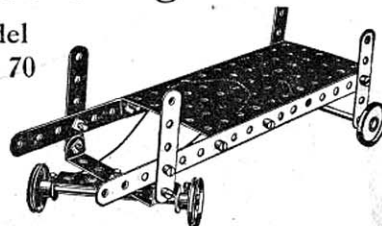

Parts Required:	2 of No. 2	11 of No. 37
	4 " " 5	1 " " 52
	2 " " 15A	2 " " 60
		4 of No. 22

Boiler Truck

Model No. 71

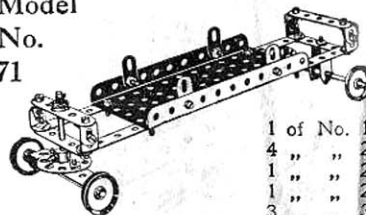


Parts Required:	8 of No. 5	1 of No. 17
	4 " " 10	4 " " 22
	8 " " 12	1 " " 23
	2 " " 15A	1 " " 24
		3 " " 35
		23 " " 37
		1 " " 44
		8 " " 52
		1 " " 60

Model No. 73 Lurry



Parts Required:	2 of No. 2	13 of No. 37
	4 " " 10	1 " " 24
	2 " " 12	1 " " 52
	2 " " 15A	2 " " 60
		4 of No. 22

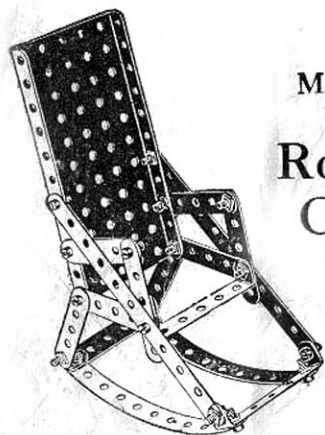

Model No. 72
Rocking Chair

Parts Required:	4 of No. 2	18 of No. 37
	9 " " 5	1 " " 52
	2 " " 12	1 " " 60


Model No. 74

Watch Stand



Parts Required:	4 of No. 2	1 of No. 35
	1 " " 17	8 " " 37
	1 " " 22	1 " " 52
	1 " " 23	1 " " 57
	1 " " 24	1 " " 60

Model No. 75 Telegraph Code Key




Parts Required:	3 of No. 2	1 of No. 22
	1 " " 10	12 " " 37
	5 " " 12	1 " " 52

A 5/16 in. perforated strip is bolted to the plate as shown, and is bent up to form a spring to return the key to its original position.

Model
No. 76


Drop Hammer



Parts Required :	2 of No. 2	3 of No. 22
	7 " " 5	1 " " 24
	6 " " 12	23 " " 37
	1 " " 15A	1 " " 44
	1 " " 19	1 " " 52
	2 of No. 60	

Model
No. 79


Double- Drop Hammer

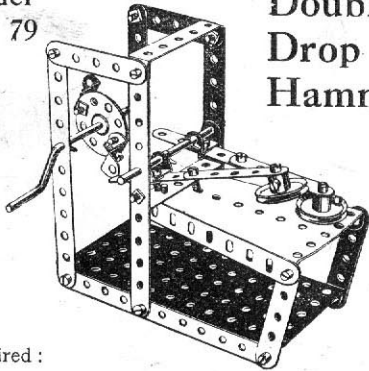

Parts Required :	4 of No. 2	1 of No. 19	22 of No. 37
	8 " " 5	2 " " 22	1 " " 52
	8 " " 12	1 " " 24	1 " " 54
	1 " " 15A	4 " " 35	2 " " 60

Model
No. 77

Roulette Wheel

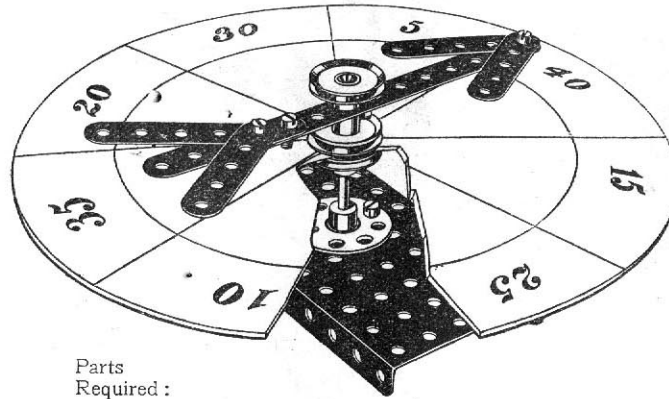


Parts
Required :

1 of No. 2
5 " " 5
1 " " 15A
3 " " 22
1 " " 24
5 " " 37
1 " " 52

Cut out a circular piece of cardboard and mark as shown to form scoring board. This is clamped between two 1" pulley wheels. The pointer revolves freely on the upright spindle and is held in position by another 1" pulley wheel.

Model No. 80

Bogey Truck

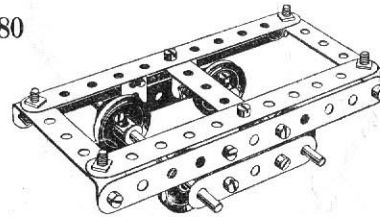


Parts
Required :

4 of No. 2	4 of No. 22
3 " " 5	18 " " 37
4 " " 10	2 " " 60
2 " " 15A	

Model
No. 78


Spinning Top



Parts Required :	1 of No. 17
	1 " " 22
	1 " " 24

Band Saw

Model
No. 81




Parts
Required :

6 of No. 2	3 of No. 22
4 " " 5	6 " " 35
2 " " 10	10 " " 37
2 " " 15A	1 " " 52
1 " " 19	2 " " 60

Gong


Model No. 82

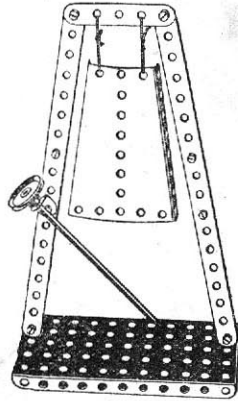

Parts Required:

2 of No. 2
1 " " 5
3 " " 12
1 " " 15A
1 " " 22
10 " " 37
1 " " 52
1 " " 54


Model No. 83 Horse Sleigh

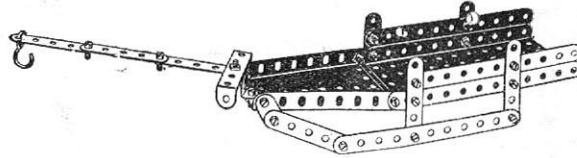

Parts Required:

4 of No. 2	25 of No. 37
9 " " 5	1 " " 52
4 " " 10	1 " " 54
2 " " 12	1 " " 57


Model No. 84 Motor Van



Parts Required:

6 of No. 2	2 of No. 15A	22 of No. 37
1 " " 3	4 " " 22	1 " " 52
9 " " 5	1 " " 22A	4 " " 60
1 " " 11	1 " " 24	


Model No. 85 Rock Drill

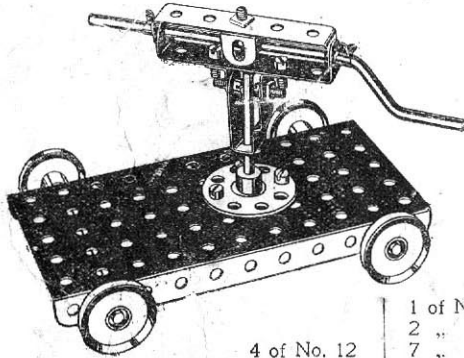

Parts Required:

4 of No. 12	1 of No. 24
1 " " 15A	2 " " 35
1 " " 19	7 " " 37
4 " " 22	1 " " 44
	1 " " 52
	2 " " 60


Model No. 86 Bed Table

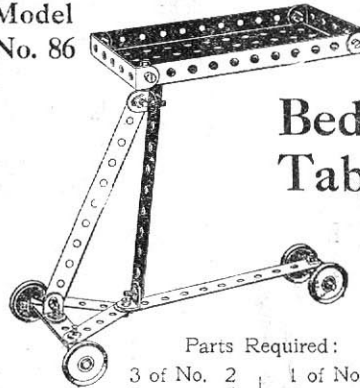

Parts Required:

3 of No. 2	1 of No. 17
2 " " 5	4 " " 22
1 " " 11	15 " " 37
4 " " 12	1 " " 52
1 " " 15A	3 " " 60


Model No. 87 Motor Lorry

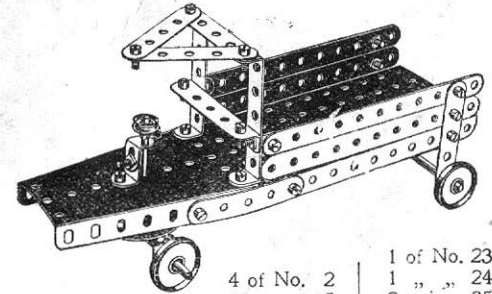

Parts Required:

4 of No. 2	1 of No. 23
8 " " 5	1 " " 24
8 " " 12	2 " " 35
2 " " 15A	25 " " 37
1 " " 17	1 " " 52
4 " " 22	1 " " 54
	2 " " 60


Model No. 88 Lawn Mower



Parts Required:

4 of No. 2	4 of No. 22
6 " " 5	21 " " 37
4 " " 10	1 " " 44
4 " " 12	1 " " 54
2 " " 15A	2 " " 60
1 " " 17	


Model No. 89 Foot Cycle



Parts Required:

5 of No. 2	1 of No. 22
1 " " 5	1 " " 24
4 " " 10	4 " " 35
1 " " 11	15 " " 37
3 " " 12	1 " " 44
2 " " 17	


Model No. 90 Cart

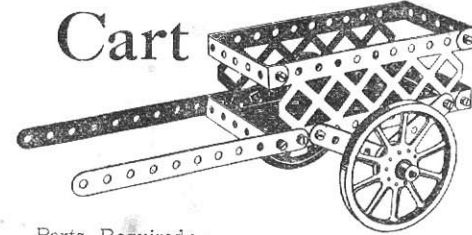

Parts Required:

4 of No. 2	2 of No. 22	2 of No. 59
4 " " 5	15 " " 37	4 " " 60
1 " " 15	1 " " 44	2 " " 100
2 " " 19A	1 " " 52	


Model No. 91 Deck Chair



Parts Required:

4 of No. 1	1 of No. 15A
4 " " 2	30 " " 37
1 " " 3	1 " " 52
6 " " 5	2 " " 60
6 " " 12	


Model No. 92 Invalid Chair



Parts Required:

4 of No. 2	22 of No. 37
8 " " 5	1 " " 52
2 " " 10	1 " " 54
2 " " 15A	2 " " 60
4 " " 22	


Forge Bellows Model No. 93



Parts Required:

4 of No. 2	1 of No. 19
1 " " 3	2 " " 22
2 " " 5	1 " " 24
2 " " 10	5 " " 35
1 " " 11	25 " " 37
2 " " 12	1 " " 52
2 " " 15A	2 " " 54
1 " " 17	3 " " 60

Model No. 94 Coster's Barrow

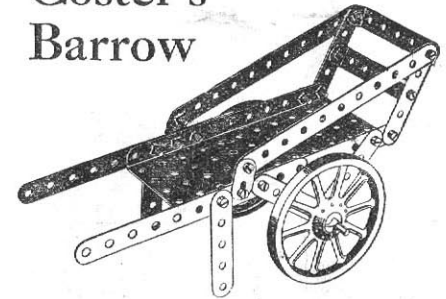


Parts Required:

4 of No. 2	4 of No. 35
8 " " 5	16 " " 37
2 " " 10	1 " " 52
1 " " 15A	2 " " 60
2 " " 19A	

Sighting Rule

Model No. 95

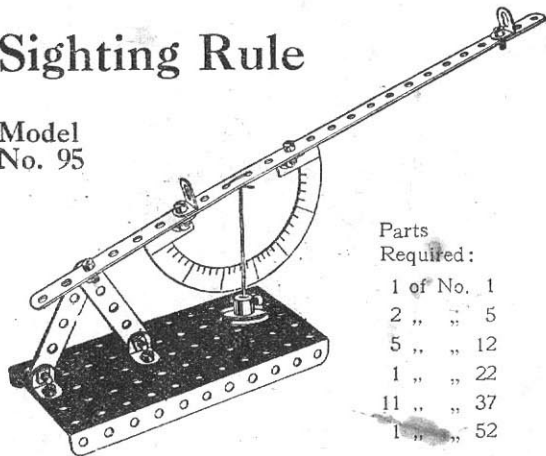


Parts Required:

- 1 of No. 1
- 2 " " 5
- 5 " " 12
- 1 " " 22
- 11 " " 37
- 1 " " 52

Devil Wall

Model No. 96

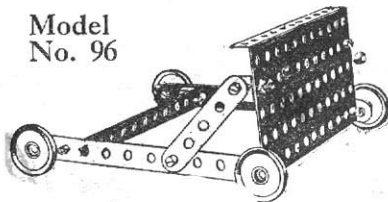


Parts Required:

- | | |
|------------|-------------|
| 3 of No. 2 | 4 of No. 22 |
| 2 " " 5 | 18 " " 37 |
| 6 " " 12 | 1 " " 52 |

Model No. 97

Hatchet

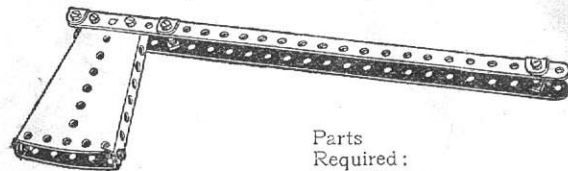


Parts Required:

- 3 of No. 1
- 6 " " 12
- 15 " " 37
- 2 " " 54

Model No. 98

Mail Bag Hanger

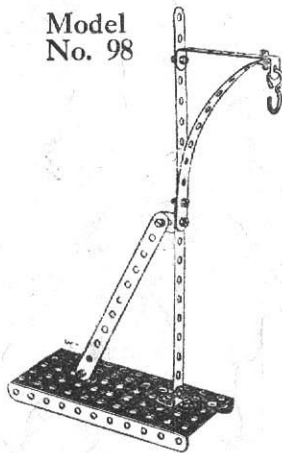


Parts Required:

- 4 of No. 2
- 4 " " 12
- 10 " " 37
- 1 " " 52
- 1 " " 57
- 1 " " 60

Model No. 99

Music Stand

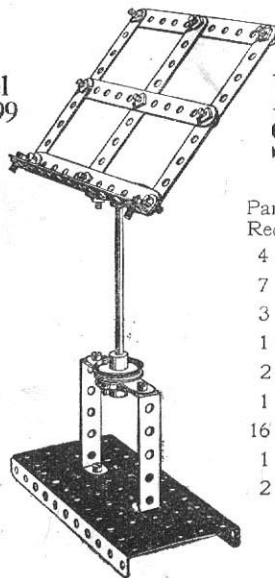


Parts Required:

- 4 of No. 2
- 7 " " 5
- 3 " " 12
- 1 " " 15A
- 2 " " 22
- 1 " " 24
- 16 " " 37
- 1 " " 52
- 2 " " 60

Punching Machine

Model No. 100

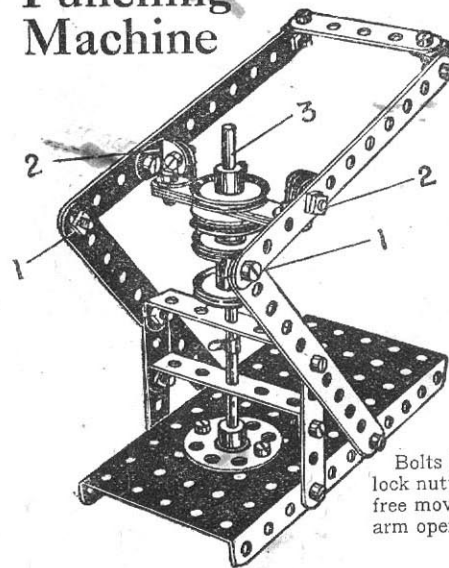


Parts Required:

- 4 of No. 2
- 7 " " 5
- 6 " " 12
- 1 " " 15A
- 4 " " 22
- 1 " " 24
- 1 " " 35
- 22 " " 37
- 1 " " 52
- 2 " " 60

Bolts 1—1 and 2—2 are lock nutted so as to permit free movement of the lever arm operating the punch 3.

Anchor

Model No. 101

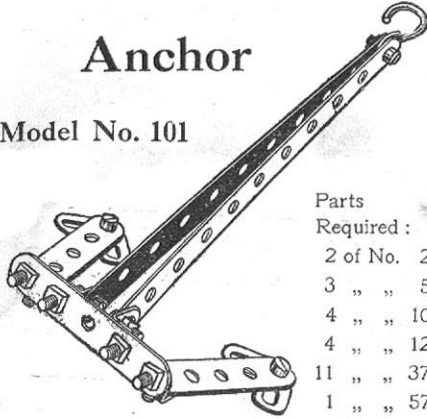

Parts Required:


2 of No. 2
3 " " 5
4 " " 10
4 " " 12
11 " " 37
1 " " 57

Model No. 102


Invalid Chair

Parts Required:

4 of No. 2	1 of No. 44
2 " " 5	2 " " 60
2 " " 15A	
1 " " 18	
3 " " 22	
1 " " 24	
2 " " 35	
13 " " 37	

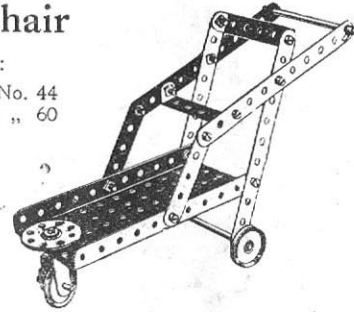


Model No. 105 Jib Crane

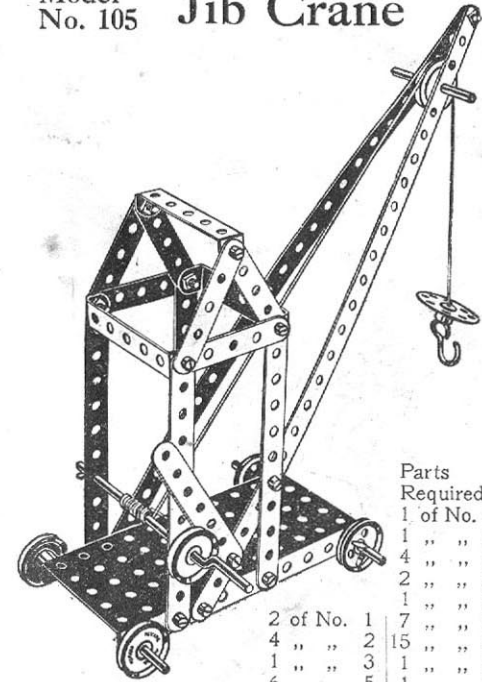

Parts Required:

1 of No. 17
1 " " 19
4 " " 22
2 " " 22A
1 " " 24
1 " " 35
2 of No. 1
4 " " 2
15 " " 37
1 " " 3
1 " " 52
6 " " 5
1 " " 57
2 " " 15A
3 " " 60

Model No. 103 Grill

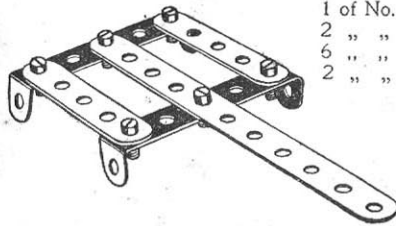


Parts Required:

1 of No. 2
2 " " 5
6 " " 37
2 " " 60

Model No. 104 Mountain Transport

Parts Required:

2 of No. 1	3 of No. 5	4 of No. 22
2 " " 2	4 " " 12	18 " " 37
	2 " " 15A	1 " " 52
		1 " " 54
		2 " " 60

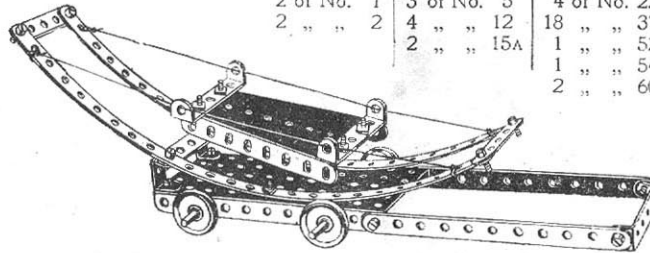

HOW TO CONTINUE

This completes the Models which may be made with Meccano Outfit No. 1. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 1A Accessory Outfit, the cost of which will be found in the Price List at the end of the Manual.

Model No. 106

Motor Van

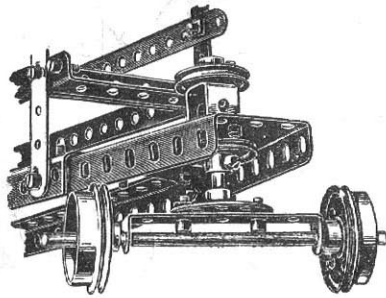
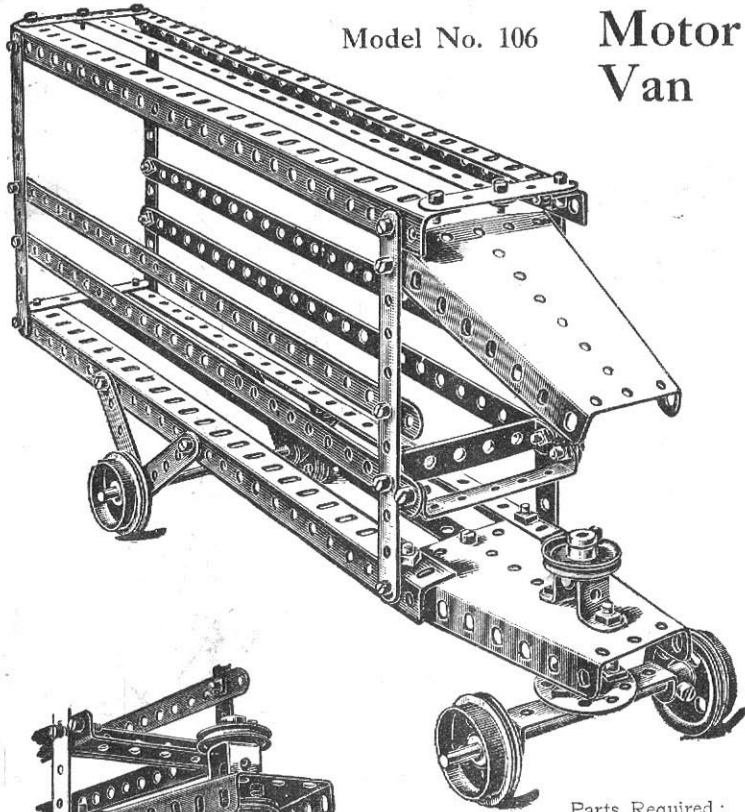



Fig. 106A

Parts Required :

6 of No. 1	2 of No. 22
4 " " 2	1 " " 24
7 " " 5	40 " " 37
4 " " 8	1 " " 45
1 " " 17	2 " " 54
4 " " 20	3 " " 60
2 " " 15	

Tipping Motor Wagon

Model No. 107

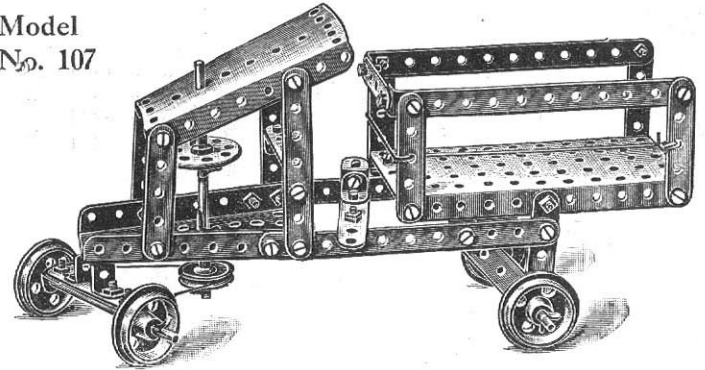

Parts Required :

4 of No. 2
2 " " 3
12 " " 5
5 " " 12
3 " " 15
4 " " 20
1 " " 22
1 " " 24
38 " " 37
1 " " 45
1 " " 52
2 " " 54
3 " " 60

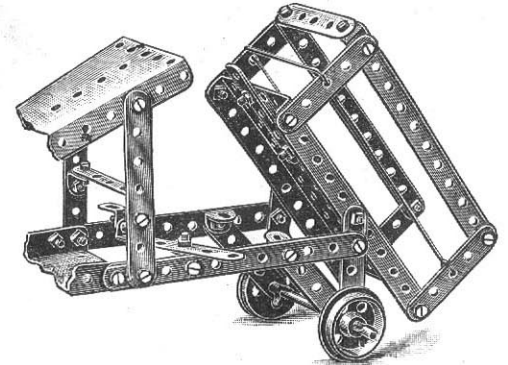


Fig. 107A

Model No. 108

Swing Bridge


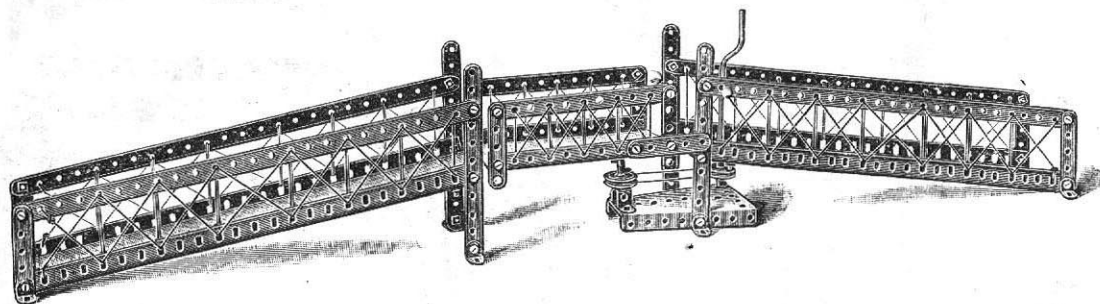


Fig. 108A

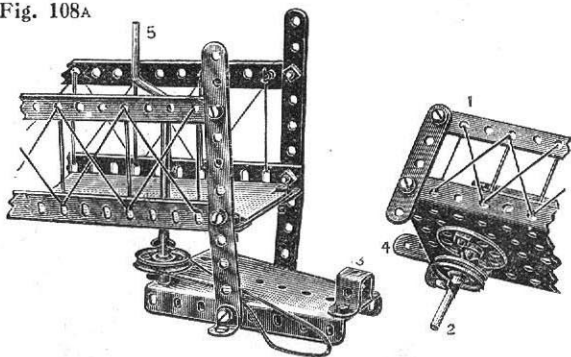

Parts Required :

4 of No. 1	1 of No. 24
6 " " 2	1 " " 35
9 " " 5	31 " " 37
4 " " 8	1 " " 45
8 " " 12	1 " " 52
1 " " 17	1 " " 54
1 " " 19	4 " " 60
2 " " 22	


The action for swinging the middle section of the Bridge will be made clearer by the detail Fig. 108A, the middle section 1 being fitted with a spindle 2 journaled in the double bent strip 3; the upper end of the spindle being secured to a bush wheel.

A short strip 4 acts as a stop against the middle section of the Bridge swinging past the central position.

The operating cord passes round pulleys on the spindles 2 and crank handle 5.

Ladder on Wheels


Model No. 109

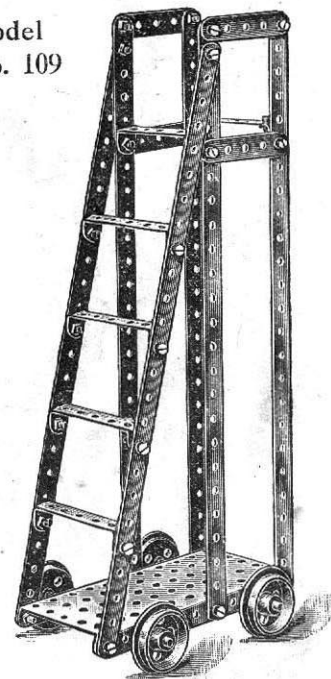

Parts Required :

6 of No. 1	24 of No. 37
4 " " 5	1 " " 52
2 " " 15	6 " " 60
4 " " 20	


Model No. 110
**Travelling
 Jib Crane**

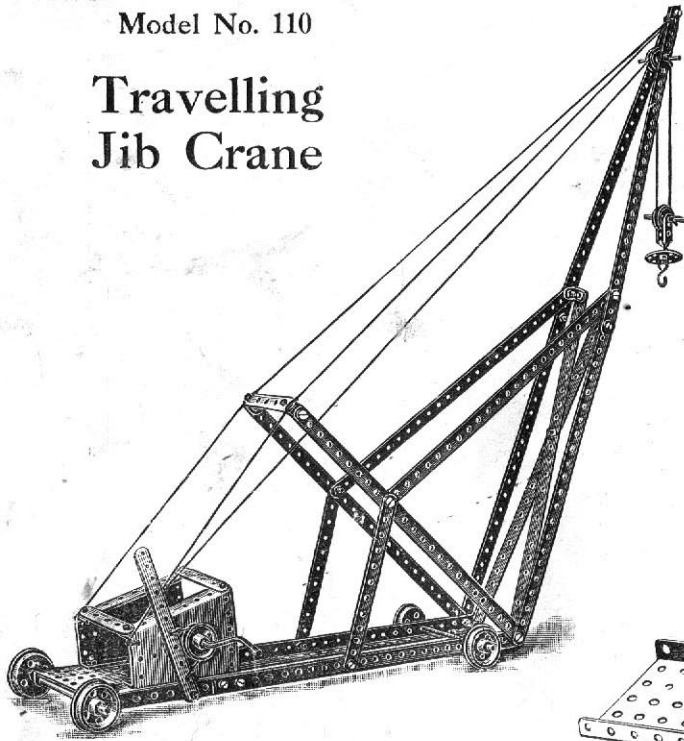

Parts Required :

10 of No. 1	2 of No. 15A	1 of No. 24
3 " " 2	2 " " 17	35 " " 37
3 " " 5	1 " " 19	1 " " 57
1 " " 60	4 " " 20	5 " " 35
2 " " 8	2 " " 22	1 " " 44
4 " " 12	1 " " 22A	1 " " 52
		2 " " 54


Model No. 111
**Roundabout
 Seesaw**

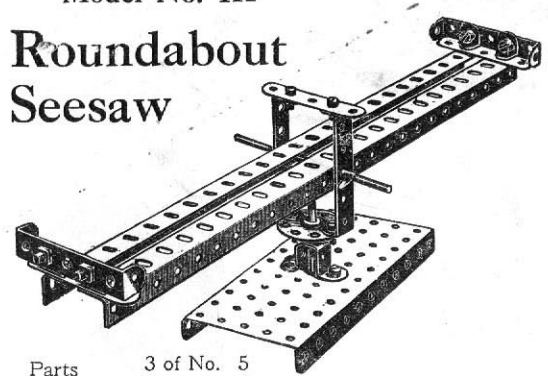

Parts Required :

3 of No. 5	
2 " " 8	
4 " " 12	14 of No. 37
1 " " 15	1 " " 45
1 " " 24	1 " " 52
2 " " 35	4 " " 60


Model No. 112 **Carrier Tricycle**

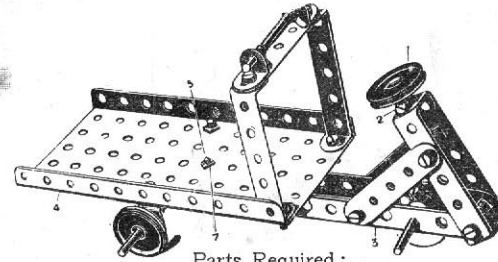

Parts Required :


2 of No. 2	3 of No. 22
3 " " 5	1 " " 24
1 " " 11	2 " " 35
2 " " 12	16 " " 37
1 " " 15	1 " " 52
2 " " 17	5 " " 60

Fig. 112A

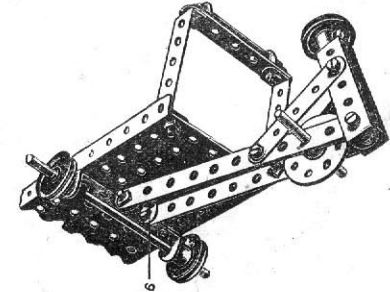

Model No. 113

Three-arm Signal

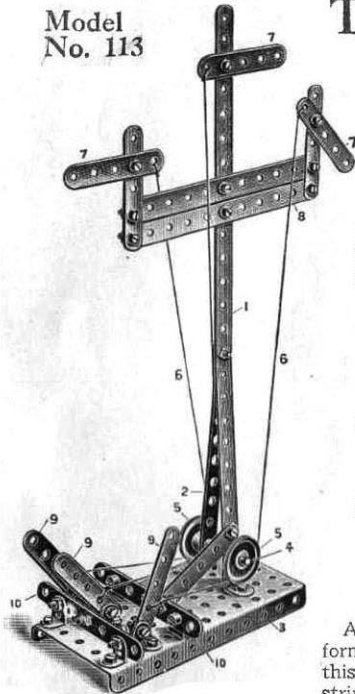

Parts Required:


1	of No. 1
3	" " 2
2	" " 3
9	" " 5
10	" " 12
1	" " 17
2	" " 22
37	" " 37
1	" " 52

A flanged plate forms the base of this model, a 12 $\frac{1}{2}$ " strip 1 being bolted

to a 5 $\frac{1}{2}$ " strip 2, the feet of both these strips being connected to the flanged plate 3 by angle brackets. A rod 4 is passed through the lower holes of the strips 1 and 2 and is fitted with guide pulleys 5 leading the actuating cords 6 to the signal arms 7. The cord operating the central arm is run under the rod 4. The signal arms 7 are carried from transverse strips 8. The operating cords 6 are led to three strips 9, pivoted to angle brackets bolted to the flanged plate, and transverse strips 10 are bolted to the perforated plate in the front and rear of the pivoted strips 9 to limit their movement.

Types of Windmills

Model No. 114

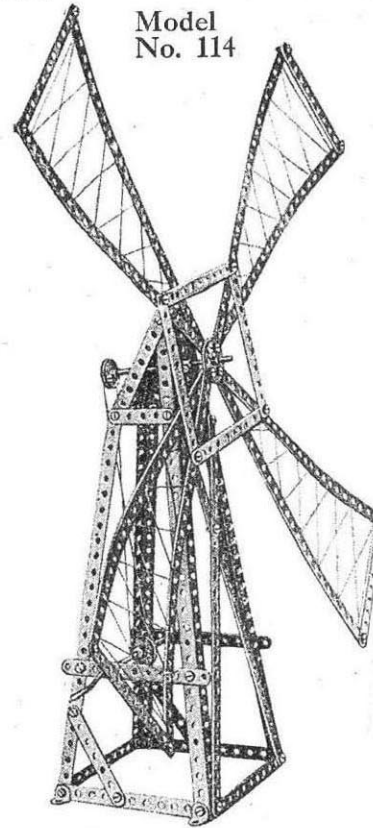


Parts Required:

10	of No. 1	1	of No. 19
13	" " 2	2	" " 22
2	" " 3	1	" " 24
2	" " 5	4	" " 35
4	" " 8	45	" " 37
4	" " 12	2	" " 54
1	" " 15		

Model No. 115

Parts Required:


4	of No. 2
2	" " 60
1	" " 15
1	" " 19
2	" " 22
1	" " 24
12	" " 37
3	" " 35
1	" " 52
4	" " 61

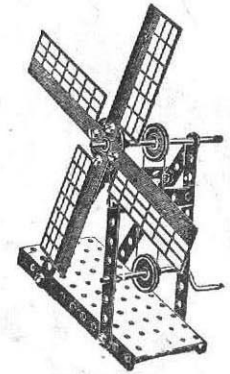

Model No. 116

Parts Required:

4	of No. 1
7	" " 5
2	" " 60
2	" " 12
1	" " 15
1	" " 19
2	" " 22
1	" " 24
20	" " 37
4	" " 35
1	" " 52
4	" " 61

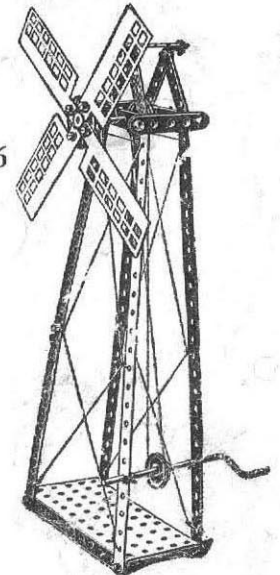

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A

Model No. 117 **Monoplane**


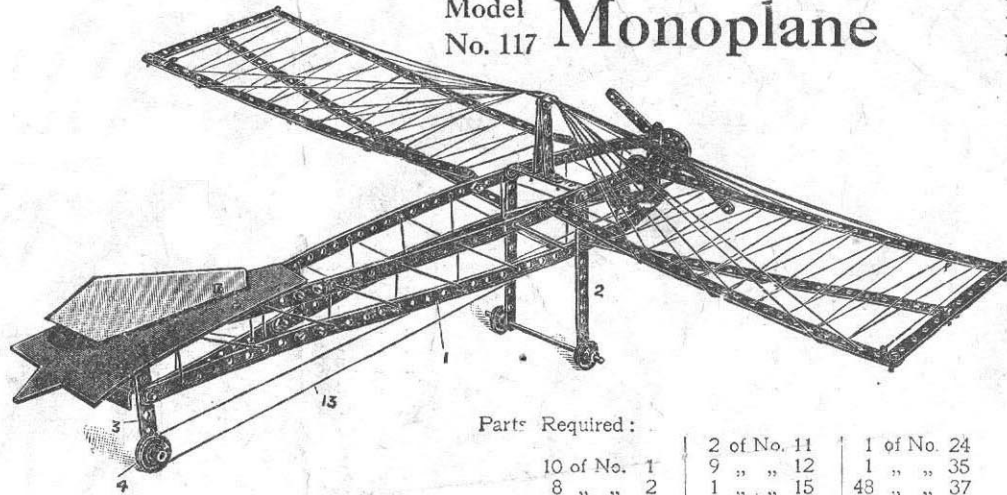


Fig. 117A

Parts Required:


10 of No. 1	2 of No. 11	1 of No. 24
8 " " 2	9 " " 12	1 " " 35
1 " " 3	1 " " 15	48 " " 37
7 " " 5	1 " " 17	1 " " 45
	4 " " 22	4 " " 60
	2 " " 22	

Model No. 119 **Wheel**

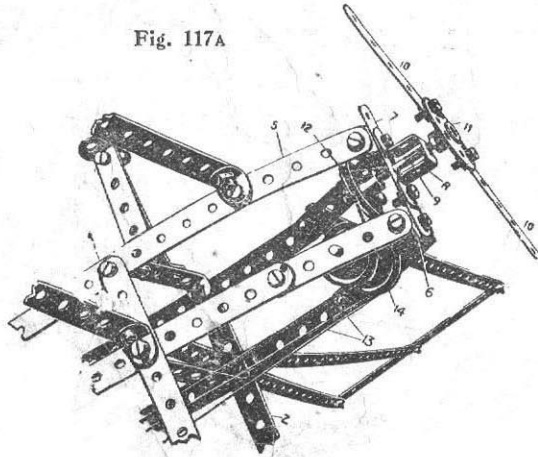


Parts Required:

5 of No. 1
12 " " 2
2 " " 5
4 " " 8
4 " " 11
2 " " 15
3 " " 20
2 " " 22
44 " " 37

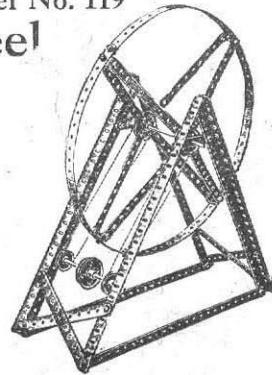

Model No. 118 **Ferry Gangway**

The vertical standard is built up from two angle girders, the slotted holes overlapped to form channel section girder.

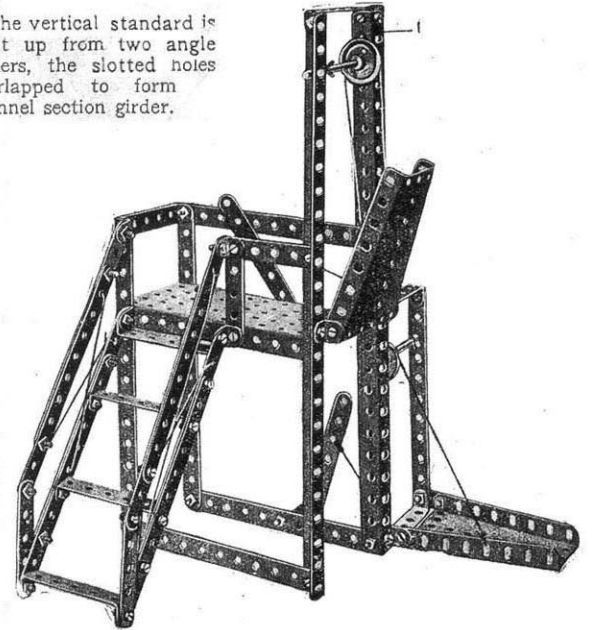


Parts Required:

14 of No. 2	2 of " 15	50 of No. 37
2 " " 3	2 " " 17	1 " " 45
6 " " 5	2 " " 22	1 " " 52
3 " " 8	2 " " 22A	2 " " 54
2 " " 10	6 " " 35	6 " " 60
7 " " 12		

Model No. 120


Roundabout

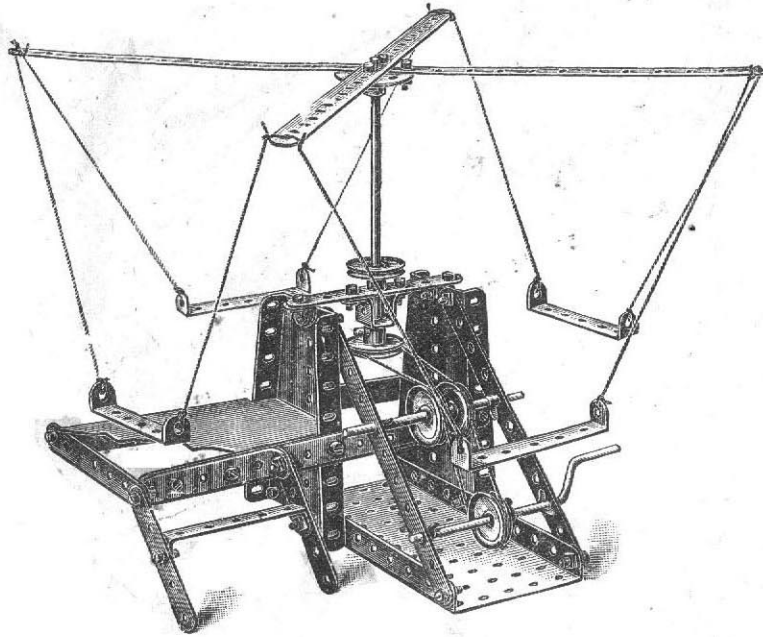

Parts Required :	2 of No. 1	2 of No. 22A
	4 " " 2	1 " " 24
	2 " " 3	4 " " 35
	4 " " 5	33 " " 37
	3 " " 12	1 " " 45
	1 " " 15	1 " " 52
	1 " " 16	2 " " 54
	1 " " 19	6 " " 60
	3 " " 22	

Railway Foot Bridge and Signals

Model No. 121

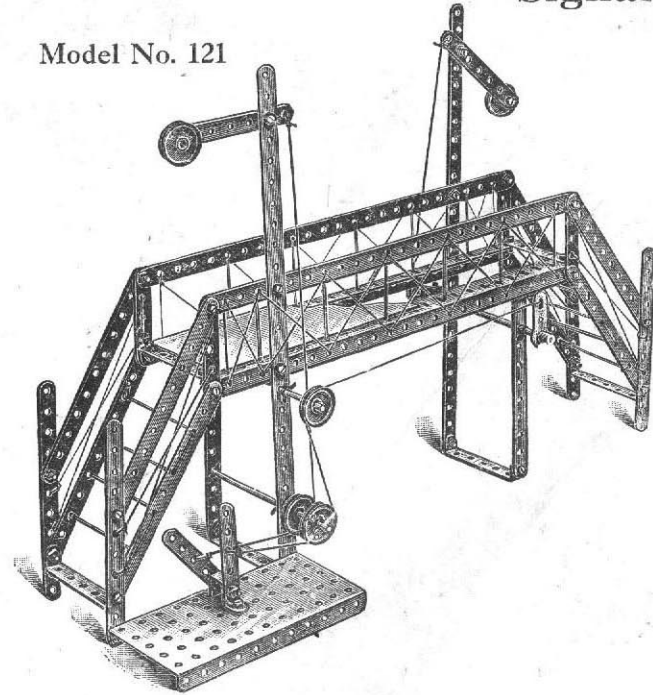

Parts Required :	4 of No. 1	2 of No. 8	6 of No. 35
	14 " " 2	2 " " 22A	1 " " 45
	2 " " 3	3 " " 22	4 " " 60
	8 " " 5	43 " " 37	2 " " 62
	3 " " 15	1 " " 52	

Model No. 122 Extending Ladder on Running Carriage

The bed of the lower carriage framework 1 is formed by bolting two 12½" strips to the sides of a large flanged plate 2, and two sector plates 3 bolted to the flanged plate by their flanges to form the sides, and a bearing for the spindle 4 carrying the operating cord 5 to raise the ladder from a horizontal position. The strips 6 form a support for the ladder when in this horizontal position. Angle brackets 7, Fig. 122A, form pivots for the lower part 8 of the ladder, and are carried from the supports 9. The upper part of the ladder 10, Fig. 122B, is slidably guided and retained on the lower ladder 8 by double brackets 11. The extension of the ladder is effected by the cranked spindle 12, round a pulley 13, on which and another 14, carried as shown in Fig. 122A, the cord 15 is passed, the ends of which are secured to the lower part of the movable ladder 10.

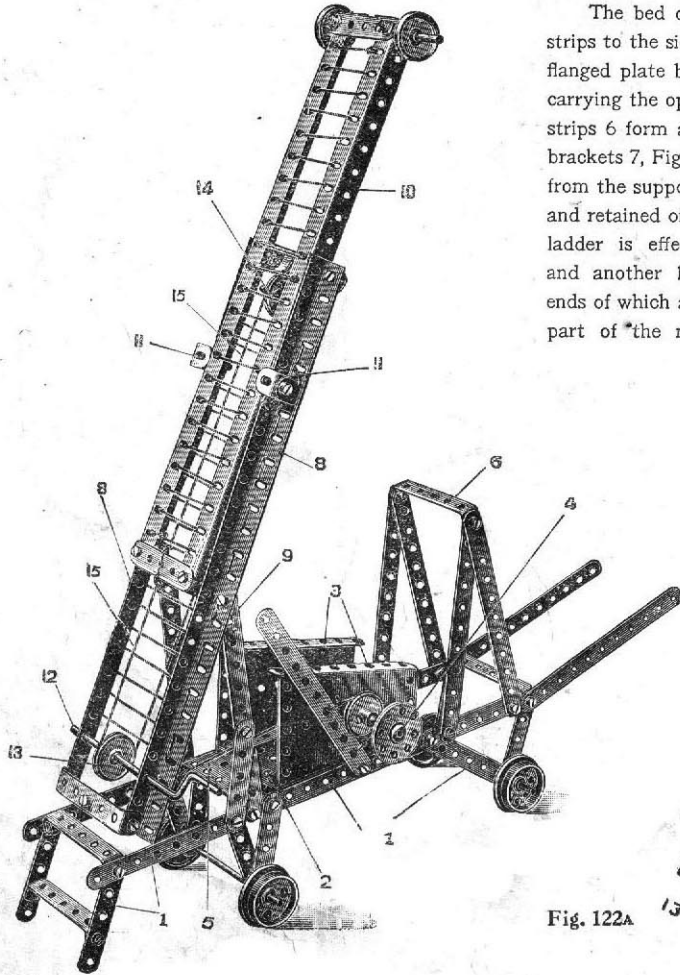


Fig. 122A


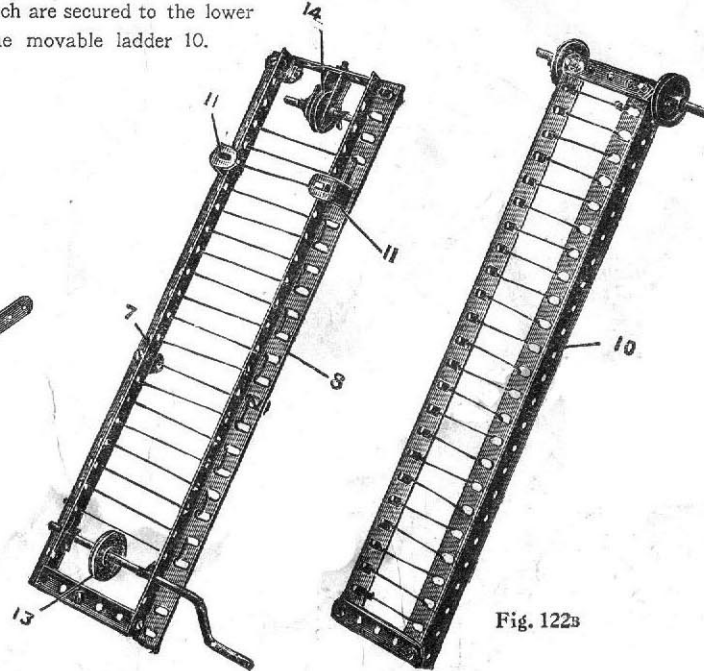


Fig. 122B


Parts Required:	
2 of No.	1
9 "	2
2 "	3
12 "	5
4 "	8
2 "	11
4 "	12
3 "	15
1 "	15A
1 "	19
4 "	20
4 "	22
1 "	22A
1 "	24
6 "	35
47 "	37
1 "	44
1 "	52
2 "	54
5 "	60

Model No. 123 Mat Frame




	1 of No. 1
Parts Required	4 " " 2
	4 " " 8
	2 " " 12
	14 " " 37

Model No. 124 Coaster




Parts Required:	
2 of No. 2	1 of No. 22
5 " " 5	1 " " 24
1 " " 15	12 " " 37
1 " " 16	1 " " 45
1 " " 17	2 " " 54
4 " " 20	1 " " 60

Model No. 125 Locomotive




Parts Required:		
4 of No. 2	1 of No. 16	46 of No. 37
2 " " 3	1 " " 17	1 " " 45
7 " " 5	4 " " 20	1 " " 52
2 " " 10	4 " " 22	1 " " 54
1 " " 11	1 " " 23	6 " " 60
8 " " 12	1 " " 24	2 " " 62
2 " " 15A	3 " " 35	

Model No. 126 Embossing Machine

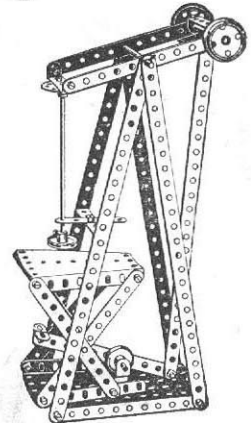


Parts Required:	
5 of No. 1	7 " " 2
	1 " " 5
	1 " " 15
	2 " " 15A
	1 " " 18
	2 " " 20
	2 " " 22
	1 " " 24
	4 " " 35
	23 " " 37
	1 " " 44
	1 " " 52
	2 " " 54
	3 " " 60

Model No. 127— Motor Van

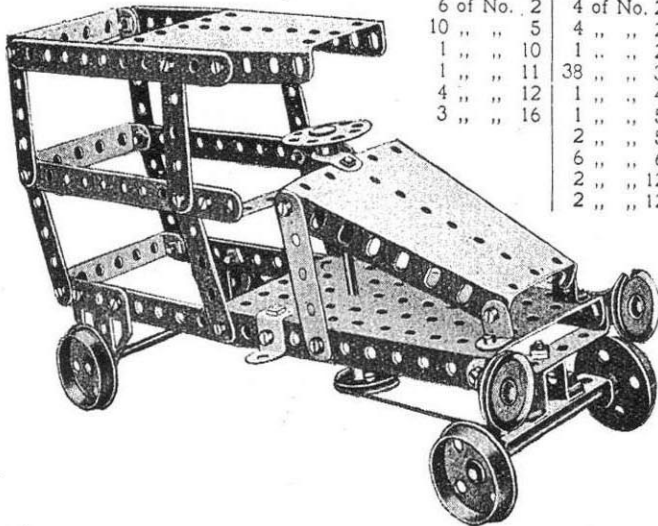


Parts required:	
6 of No. 2	4 of No. 20
10 " " 5	4 " " 22
1 " " 10	1 " " 24
1 " " 11	38 " " 37
4 " " 12	1 " " 44
3 " " 16	1 " " 52
	2 " " 54
	6 " " 60
	2 " " 125
	2 " " 126A

Model No. 128 Try-your-Strength Machine

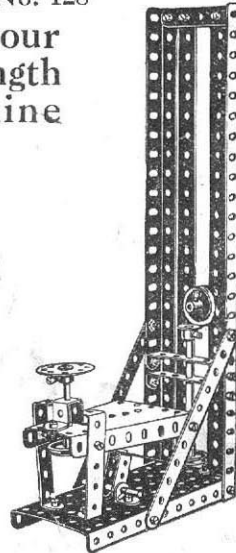


Parts Required:	
2 of No. 1	3 " " 2
	2 " " 5
	2 " " 8
	2 " " 12
	1 " " 16
	2 " " 17
	1 " " 18
	4 " " 22
	1 " " 24
	9 " " 37
	1 " " 44
	1 " " 45
	1 " " 52
	1 " " 54
	4 " " 60
	1 " " 62

Model No. 129 Mechanical Hammer

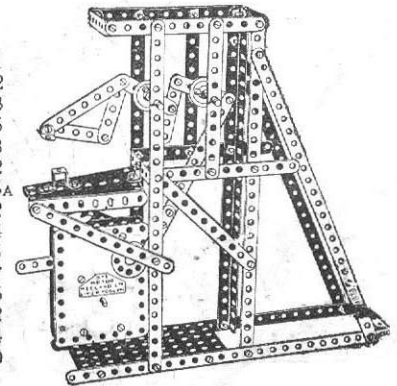


Parts Required:	
6 of No. 1	11 " " 2
	1 " " 3
	7 " " 5
	2 " " 8
	3 " " 12
	2 " " 15A
	4 " " 22
	1 " " 24
	4 " " 35
	48 " " 37
	1 " " 45
	1 " " 52
	1 " " 54
	2 " " 60

Model No. 130 Designing Machine

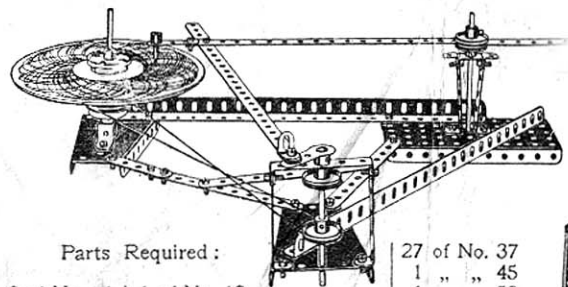


Parts Required:		27 of No. 37	
2 of No. 1	1 of No. 12	1	45
3 " " 2	2 " " 15A	1	52
2 " " 8	1 " " 16	4 of No. 22	5
1 " " 11	1 " " 20	1 " " 24	2 " " 54
		1 " " 35	5 " " 60
		2 " " 35	2 " " 62

Model No. 131 Crossbow

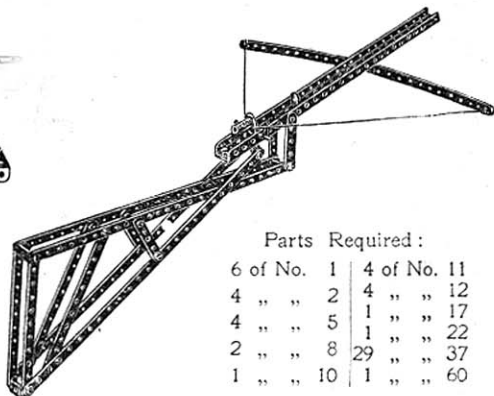


Parts Required:		4 of No. 11	
6 of No. 1	4 " " 12	4 " " 2	4 " " 17
4 " " 2	1 " " 22	4 " " 5	1 " " 29
2 " " 8	29 " " 37	1 " " 10	1 " " 60

Model No. 132 Lathe

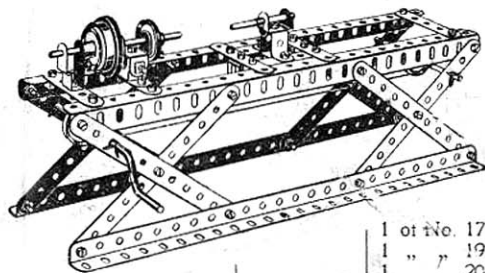

Parts Required:		1 of No. 17	
4 of No. 8	1 " " 19	1 " " 20	1 " " 22
3 " " 11	4 " " 35	6 " " 37	41 " " 44
4 " " 12	1 " " 44	1 " " 15A	1 " " 45
8 of No. 2	1 " " 16	7 " " 5	1 " " 16


Model No. 133

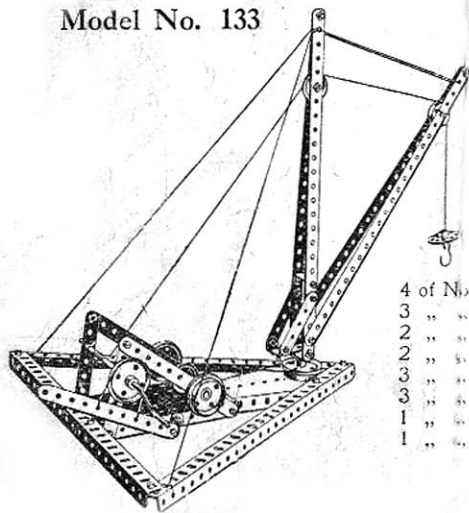

Dwarf Derrick

Parts Required:		1 of No. 19	
4 of No. 1	4 " " 20	4 " " 22	2 " " 22A
3 " " 2	1 " " 23	1 " " 24	3 " " 35
2 " " 3	1 " " 37	2 " " 5	1 " " 45
2 " " 5	1 " " 52	3 " " 8	1 " " 54
3 " " 8	1 " " 57	1 " " 15A	1 " " 62
1 " " 11	1 " " 62	1 " " 17	

Model No. 134

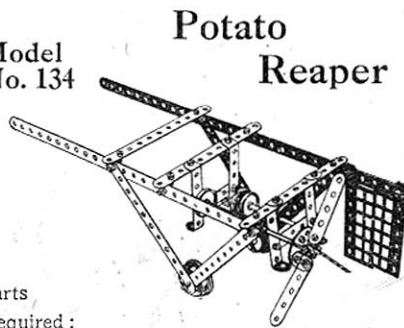


Potato Reaper

Parts Required:		1 of No. 15A		5 of No. 35	
2 of No. 1	1 of No. 20	2 " " 22	31 " " 37	10 " " 12	4 " " 60
8 " " 2	2 " " 22A	2 " " 24	2 " " 61	2 " " 15	


Model No. 135 Elevator

Parts Required:		2 of No. 22A	
1 of No. 1	2 of No. 35	10 " " 2	5 " " 37
10 " " 2	44 " " 44	1 " " 3	1 " " 52
1 " " 3	2 " " 54	10 " " 5	2 " " 54
4 " " 8	5 " " 60	4 " " 8	1 " " 17
4 " " 12		1 " " 15A	1 " " 19
1 " " 17		1 " " 19	1 " " 22

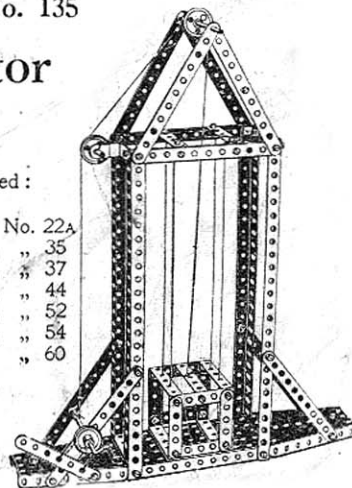

Model
No. 136

Maize Sheller

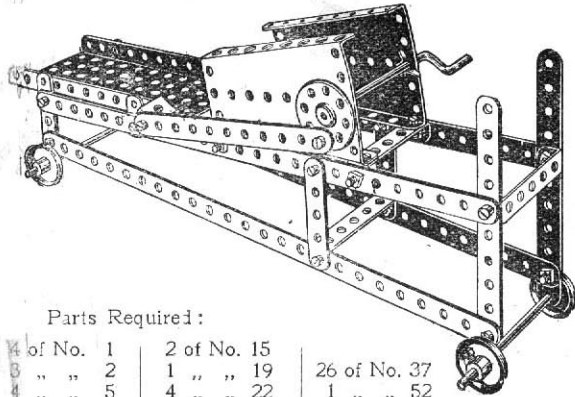


Parts Required:

4 of No. 1	2 of No. 15	26 of No. 37
8 " " 2	1 " " 19	1 " " 52
4 " " 5	4 " " 22	2 " " 54
2 " " 10	1 " " 24	4 " " 60
1 " " 11	2 " " 35	

Model No. 137

Hay Stacker

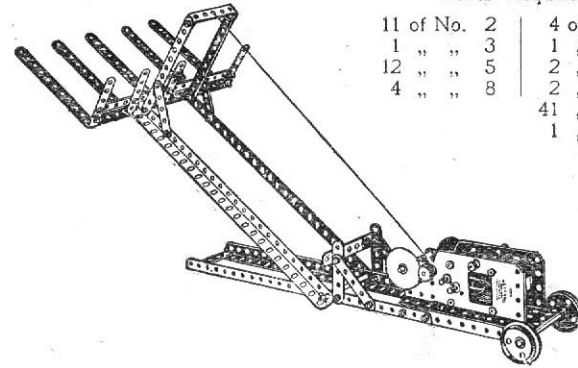


Parts Required:

11 of No. 2	4 of No. 12
1 " " 3	1 " " 16
12 " " 5	2 " " 20
4 " " 8	2 " " 35
	41 " " 37
	1 " " 52

Model
No. 139

Beam Scales

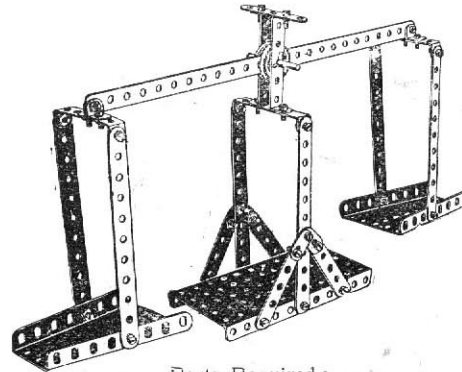


Parts Required:

1 of No. 1	4 of No. 12	32 of No. 37
6 " " 2	1 " " 17	1 " " 52
5 " " 5	2 " " 22A	2 " " 54
4 " " 10	2 " " 35	5 " " 60

Model No. 138

Candy Puller

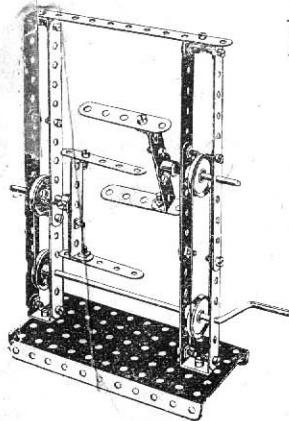

Parts
Required:


9 of No. 2
4 " " 5
4 " " 11
2 " " 17
1 " " 19
4 " " 22
2 " " 35
26 " " 37
1 " " 52
2 " " 60
2 " " 62

Model No. 140


Baby Chair

Parts
Required:

8 of No. 2
2 " " 3
10 " " 5
6 " " 12
2 " " 17
4 " " 22
32 " " 37
6 " " 60

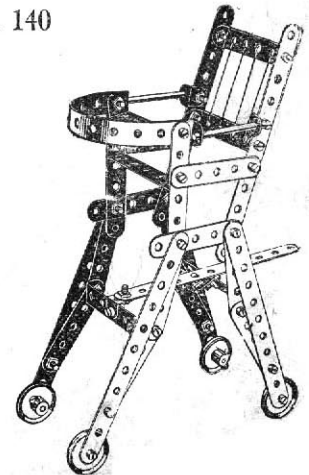

Hay Tedder

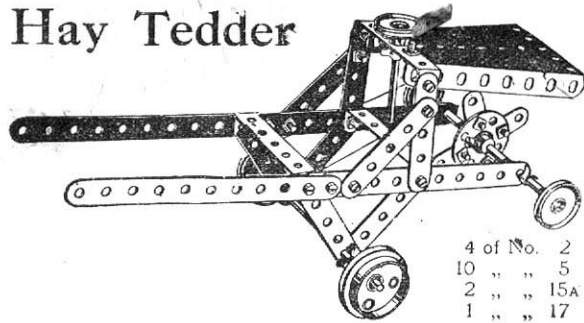


- 4 of No. 2
- 10 " " 5
- 2 " " 15A
- 1 " " 17

Model No. 141

Parts Required:

- 2 of No. 20
- 3 " " 22
- 1 " " 24
- 5 " " 35
- 18 " " 37
- 1 " " 54
- 3 " " 60


Model No. 142 Ducking Chair

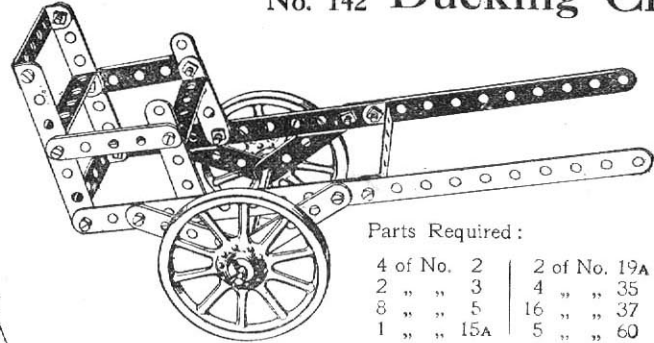

Parts Required:

- | | |
|------------|--------------|
| 4 of No. 2 | 2 of No. 19A |
| 2 " " 3 | 4 " " 35 |
| 8 " " 5 | 16 " " 37 |
| 1 " " 15A | 5 " " 60 |


Model No. 143 Needlework Basket

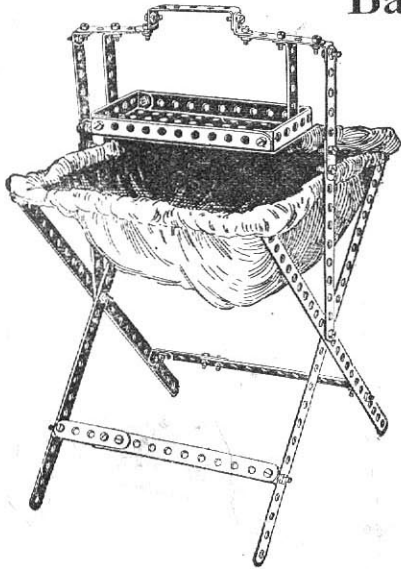

Parts Required:

- 4 of No. 1
- 6 " " 2
- 2 " " 3
- 6 " " 5
- 12 " " 12
- 46 " " 37
- 1 " " 52
- 3 " " 60

Model No. 144

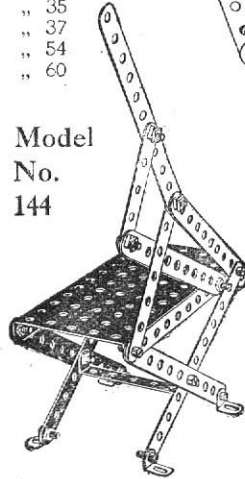

Cutting Machine


Parts Required:

- 8 of No. 2
- 1 " " 3
- 1 " " 5
- 4 " " 12
- 20 " " 37
- 1 " " 52

Model No. 145 Dinner Gong

Parts Required:

- 6 of No. 1
- 4 " " 2
- 2 " " 5
- 2 " " 8
- 2 " " 11
- 1 " " 15
- 1 " " 22
- 27 " " 37
- 1 " " 54

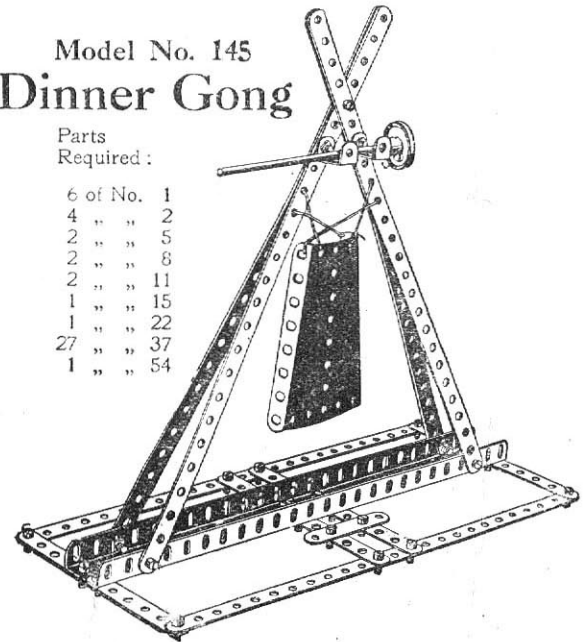


These Models Can be Made with MECCANO Outfit No. 2, or No. 1 and No. 1A


Model No. 146 Seashore Aeroplage

Parts
Required :

3 of No. 1	1
1 " " 2	2
3 " " 5	5
4 " " 12	12
2 " " 15	15
1 " " 16	16
4 " " 22	22
2 " " 22A	22A
1 " " 24	24
6 " " 35	35
15 " " 37	37
1 " " 44	44
1 " " 52	52
1 " " 54	54
2 " " 60	60

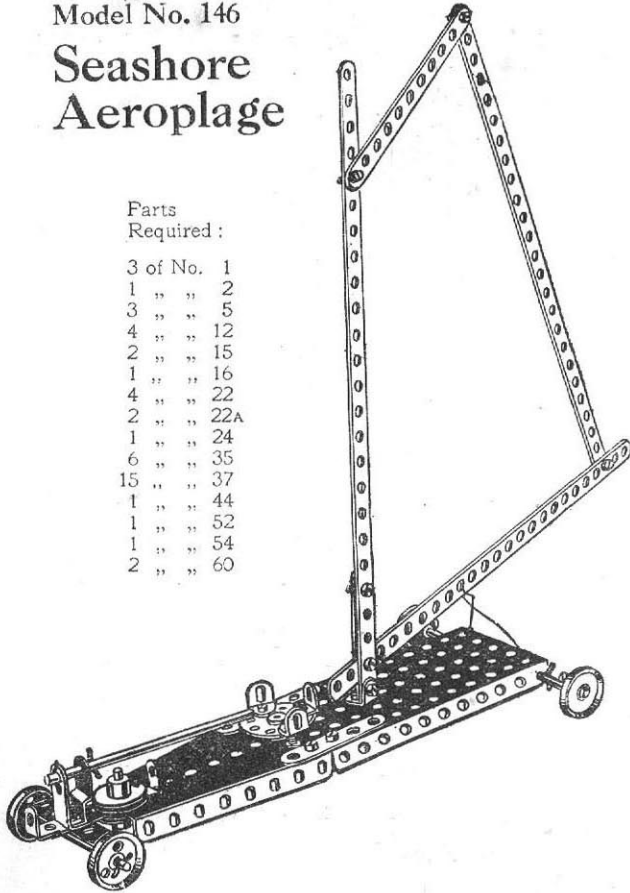

Model No. 147 Mechanical Hammer

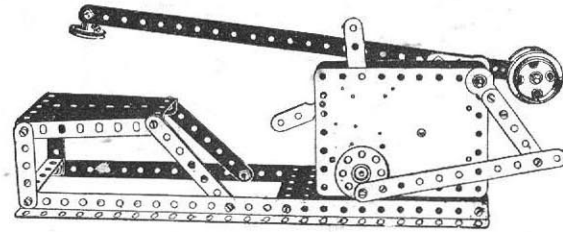


Parts
Required :

1 of No. 1	1	4 of No. 12	26 of No. 37
1 " " 2	2	1 " " 17	1 " " 52
2 " " 3	3	2 " " 20	1 " " 54
2 " " 5	5	1 " " 22	1 " " 60
2 " " 8	8	1 " " 24	2 " " 62

Model No. 148

Coal Shaker

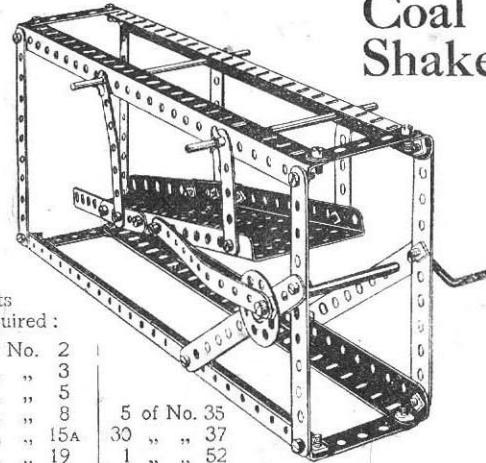


Parts
Required :

7 of No. 2	2		
2 " " 3	3		
8 " " 5	5		
4 " " 8	8	5 of No. 35	
2 " " 15A	15A	30 " " 37	
1 " " 19	19	1 " " 52	
1 " " 24	24	1 " " 54	

These Models Can be Made with MECCANO Outfit No. 2. or No. 1 and No. 1A


Model No. 149 Sifter

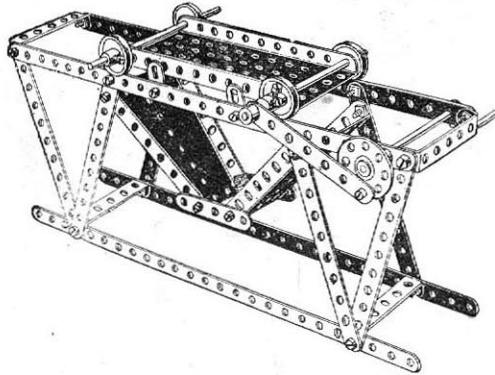

Parts Required:


4 of No.	1
6 " "	2
1 " "	3
2 " "	5
4 " "	10
2 " "	15A
1 " "	19
4 " "	22
1 " "	24
4 " "	35
26 " "	37
1 " "	52
2 " "	54
4 " "	60

Model No. 150 Spinning Top

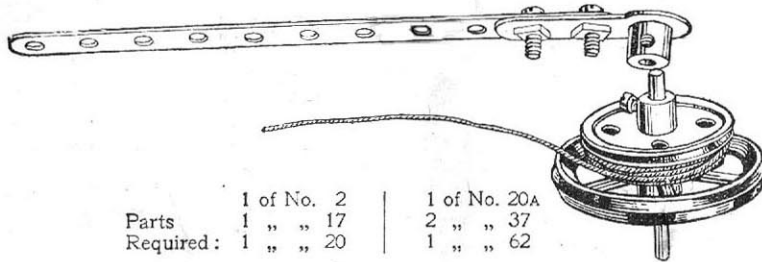

Parts	1 of No. 2	1 of No. 20A
Required:	1 " " 17	2 " " 37
	1 " " 20	1 " " 62

Model No. 151 Easel

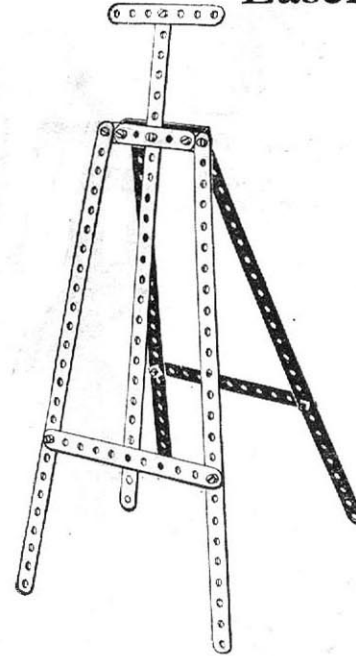


Parts Required:

5 of No.	1
2 " "	2
2 " "	3
1 " "	5
2 " "	12
14 " "	37
1 " "	60

HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 2. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 2A Accessory Outfit, the cost of which will be found in the Price List at the end of the Manual.

Model No. 152, Swing Bridge

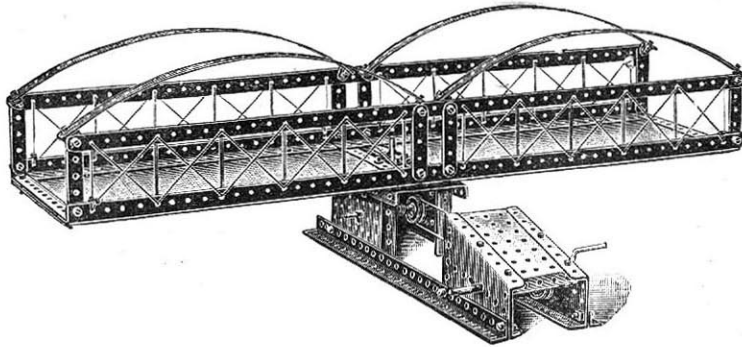

Parts Required:

8 of No. 1	1 of No. 19	60 of No. 37
4 " " 2	2 " " 22	1 " " 52
8 " " 5	1 " " 24	3 " " 53
6 " " 8	1 " " 26	2 " " 54
10 " " 12	1 " " 32	2 " " 59
2 " " 15	3 " " 35	1 " " 60

This is a fine engineering model of the highest value to the young student, and any thought and care expended on its construction will be well repaid.

The base portion containing the perpendicular axle actuated by the worm and pinion should be constructed first. This, as will be seen by the illustration, Fig. 152A, is formed by connecting a small flanged plate to an angle girder three holes from one end and a sector plate at the other end to form one side of the base. The other side is constructed in a similar manner. These two sides are then connected together at one end by a large flanged plate containing the spindle, upon which the bridge swings, and at the other by a small flanged plate. A $2\frac{1}{2}$ " bent strip is connected to the angle girders to carry the lower portion of the perpendicular axle upon which the bridge swings. A $\frac{1}{2}$ " pinion is secured to this axle, which is operated by the horizontal spindle upon which is secured a worm wheel. A pulley wheel is also secured to this spindle around which a driving rope passes from the pulley at the other end of the base secured to a crank handle, as shown in the illustration.

The platform is constructed by connecting two angle girders in the third holes. Two $2\frac{1}{2}$ " strips are attached to these in the centre and one at each end, with two $12\frac{1}{2}$ " strips along the top. Two $12\frac{1}{2}$ " strips are curved and connected by four angle brackets to form one side of the bridge. The other side is formed in a similar manner, and both are connected together by $5\frac{1}{2}$ " strips at the end and in the centre. Attached to the two $5\frac{1}{2}$ " strips in the centre is a bush wheel upon which the platform rotates.

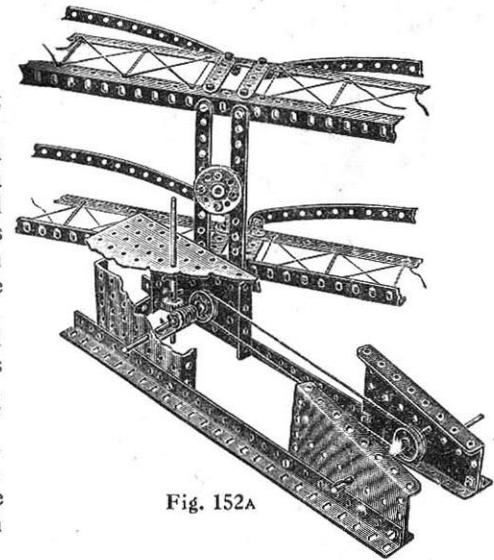


Fig. 152A

Model No. 153 Cake Walk

Parts Required:

8 of No. 1	1 of No. 32
12 " " 2	8 " " 35
9 " " 5	62 " " 37
6 " " 8	2 " " 52
8 " " 12	2 " " 53
4 " " 15	3 " " 59
2 " " 15A	6 " " 60
1 " " 22	2 " " 62
1 " " 25	



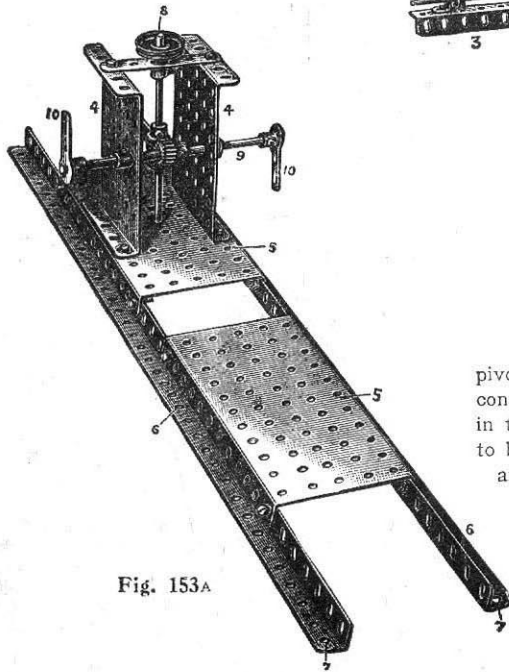


Fig. 153A

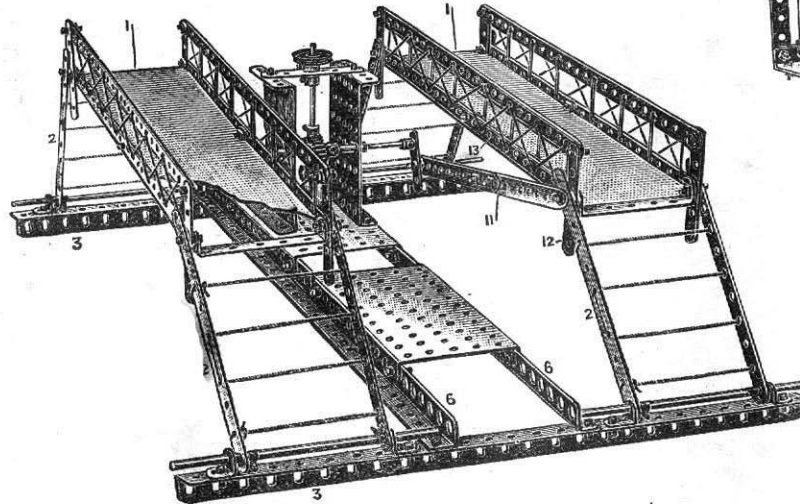

This model comprises two side platforms 1 carried upon $5\frac{1}{2}$ " strips 2 pivoted to angle brackets bolted to angle girders 3. The gear box, Fig. 153A, consists of small flanged plates 4 bolted to a large flanged plate 5, which in turn is bolted to angle girders 6 overlapped 14 holes. It is necessary to bolt the flanges to the flanged plate 5 outside the vertical parts of the angle girders 6 so that the end holes 7 shall register with the holes in the angle girders 3. The platforms 1 are rocked from a vertical shaft 8 gearing with a shaft 9 by a worm and pinion, the ends of the shaft 9 being fitted with cranks 10 pivotally bolted to connecting rods 11 formed of two $5\frac{1}{2}$ " strips overlapped two holes. The strips 11 are also pivotally bolted to the end strips 2, a vertical $2\frac{1}{2}$ " strip 12, and the lower end hole of the lower strip 13 of each side platform, so as to give free rocking movement.

Tower Wagon

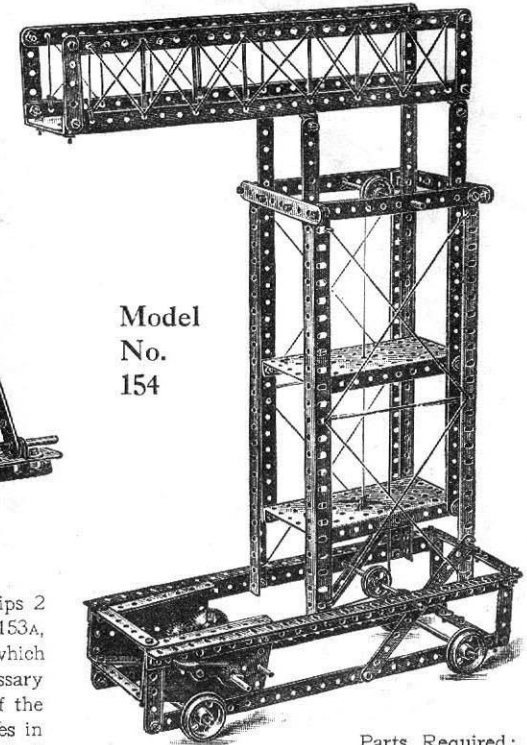

Model
No.
154

Parts Required:

8 of No. 1	4 of No. 15	1 of No. 33
4 " " 2	1 " " 15A	6 " " 35
6 " " 3	1 " " 19	69 " " 37
2 " " 4	4 " " 20	2 " " 52
11 " " 5	2 " " 22	2 " " 54
8 " " 8	2 " " 26	2 " " 60
14 " " 12	1 " " 27A	

Model No. 155 Level Crossing Gate

Parts Required:		
9 of No. 2	6 of No. 8	4 of No. 22
4 " " 3	16 " " 12	54 " " 37
2 " " 4	4 " " 15	2 " " 52
6 " " 5		4 " " 60

This Model, if constructed with care, is a most admirable one, as the gates are opened simultaneously by the operation of one lever.

To construct it, commence by taking two angle girders and connecting them together in the second hole from each end with a $3\frac{1}{2}$ " strip placed perpendicularly between them to form the supports of one pair of gates as shown in Fig. 155. The supports for the other pair of gates are arranged in a similar manner. These two structures are connected by two other angle girders and two flanged plates, as shown in the illustration.

The gates are formed by connecting two $5\frac{1}{2}$ " strips with a $2\frac{1}{2}$ " strip at the outer end of the gate and a $2\frac{1}{2}$ " bent strip at the inner end, to permit the axle rods to pass through upon which the gates swing.

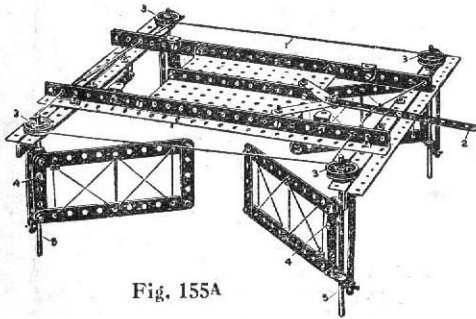


Fig. 155A

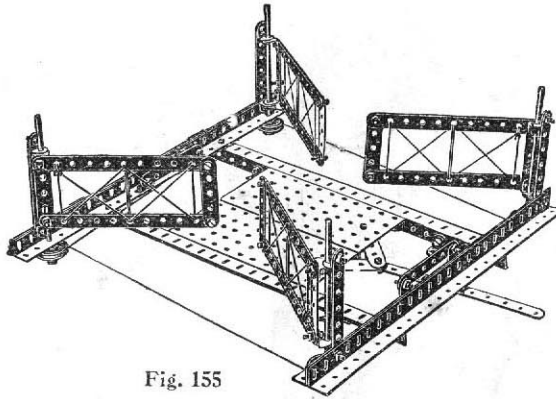


Fig. 155

Fig. 155A is an inverted view showing the arrangement of operating cord 1 which is passed from the operating lever 2, around the corner pulleys 3, and back to the lever 2. In order to obtain a better grip on the pulleys it is desirable to wind the operating cord twice around them. It is to be noted that the cord 1 is wound in opposite directions around the diagonal pairs of pulleys 3.


Pinching screws 4 are fitted in the inner sides of the gates to grip them to the spindles 5 so that all rotate together.

Pile Driver

Model No. 156

Parts Required:

2 of No. 1	
1 " " 3	
2 " " 4	
8 " " 5	
2 " " 8	
4 " " 12	
4 " " 15	
1 " " 19	
4 " " 20	
1 " " 21	
1 " " 22	
1 " " 26	
1 " " 27A	
4 " " 35	
40 " " 37	
1 " " 45	
1 " " 52	
1 " " 53	
2 " " 60	

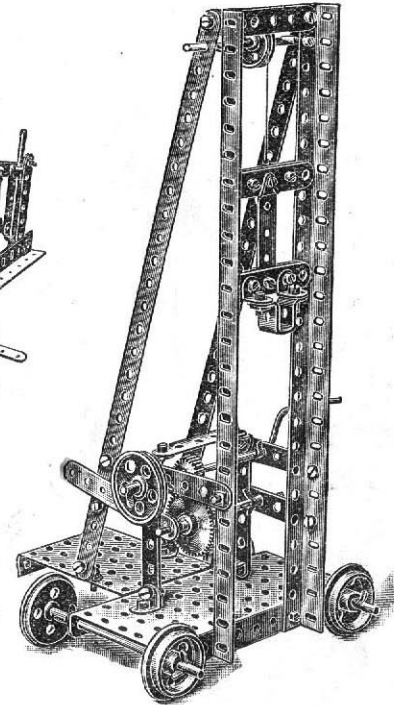


This illustration shows a model pile driver in which the pile head is guided on the two vertical angle girders. The raising of the pile head is controlled from the main driving shaft through the pinion and gear wheel. This latter is mounted on the end of the pivoted lever, and in order to drop the pile head the lever is raised to free the gear wheel. A grooved pulley is fitted on the pinion shaft to enable the model to be driven from an engine.

Model No. 157 Rotating Crane

Parts Required:

10 of No.	1	2 of No.	20	1 of No.	44
13 " "	2	1 " "	21	1 " "	45
3 " "	3	1 " "	22	2 " "	52
1 " "	4	1 " "	24	1 " "	57
5 " "	5	2 " "	26	4 " "	59
8 " "	8	1 " "	27A		
1 " "	11	1 " "	33		
12 " "	12	4 " "	35		
3 " "	15	61 " "	37		
2 " "	17				
1 " "	19				

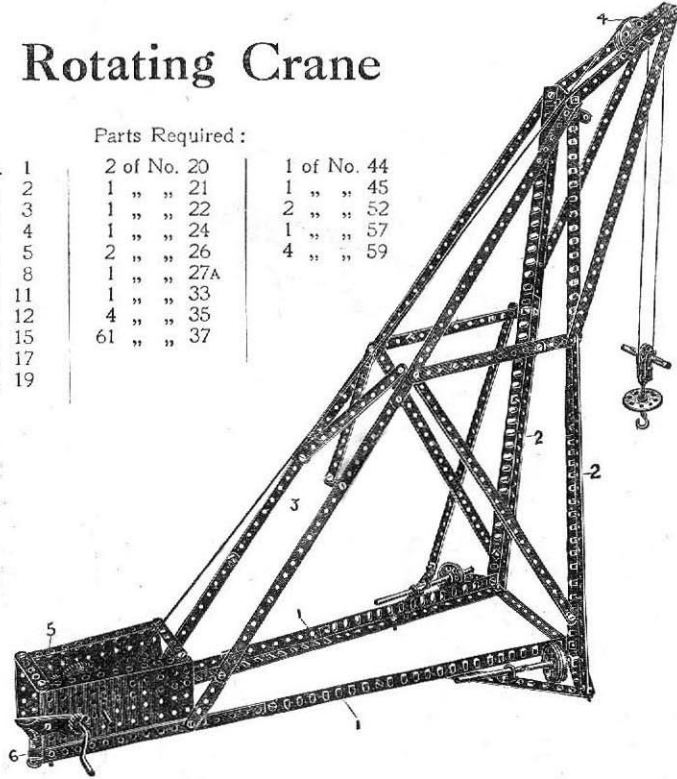


The lower horizontal ribs 1 and main vertical members 2 are made of angle girders overlapping nine holes; and the diagonal ties 3 of two $12\frac{1}{2}$ " strips and one $5\frac{1}{2}$ " strip, the $12\frac{1}{2}$ " strips being overlapped three holes, and the lower $5\frac{1}{2}$ " strip seven holes.

The pulley 4 is carried in a nosing made of two $5\frac{1}{2}$ " strips and two $12\frac{1}{2}$ " strips connected at their apex by angle brackets. The rear swivel point of the crane is made by bolting the gear box 5 to a double bent strip 6 secured to the floor. The crane runs on the flanged wheels 7, the spindles of which are secured in their position by collars and set-screws.

Inclined Delivery Chute

Model No. 158

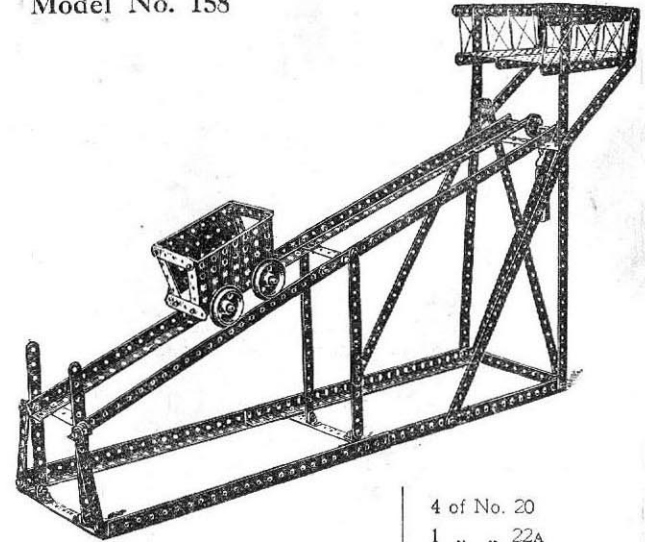

Parts	2 of No.	4	4 of No.	20	
Required:	8 " "	5	1 " "	22A	
	8 " "	8	2 " "	35	
6 of No.	1	8 " "	8	70 " "	37
16 " "	2	16 " "	12	2 " "	52
4 " "	3	3 " "	15	2 " "	53
				1 " "	57

This model furnishes an illustration of the inclined plane. The loading platform at the extreme right delivers a load into the truck, which being now heavier than the balance weight, runs down the incline, and when at the bottom discharges its load by tipping. The weight immediately overcoming the empty truck returns it quickly to the loading platform.

Model No. 159 Fire Escape

Parts Required :

2 of No. 1	1 of No. 15A
4 " " 2	2 " " 19
3 " " 3	4 " " 20
2 " " 4	3 " " 22
4 " " 5	1 " " 23
4 " " 8	2 " " 26
2 " " 11	2 " " 33
18 " " 12	8 " " 35
4 " " 15	48 " " 37
	1 " " 60

In constructing this model, take two angle girders 1 and tie these together with $3\frac{1}{2}$ " strip 2 at top and bottom. $5\frac{1}{2}$ " strips 3 are then attached at right angles to one end of the frame, diagonal stays 4 tying these short strips to the angle brackets attached to the frame. The sliding ladder, Fig. 159B, is constructed from two angle girders reversed to those of the main frame, the angle girders of the sliding ladder being tied together by two $2\frac{1}{2}$ " strips, and being retained and guided in the main carriage by the short angle brackets 5 which act as clips. The framework of the running truck, Fig. 159A, is very simply constructed, and is pivotally attached by angle brackets 6 to the main frame.

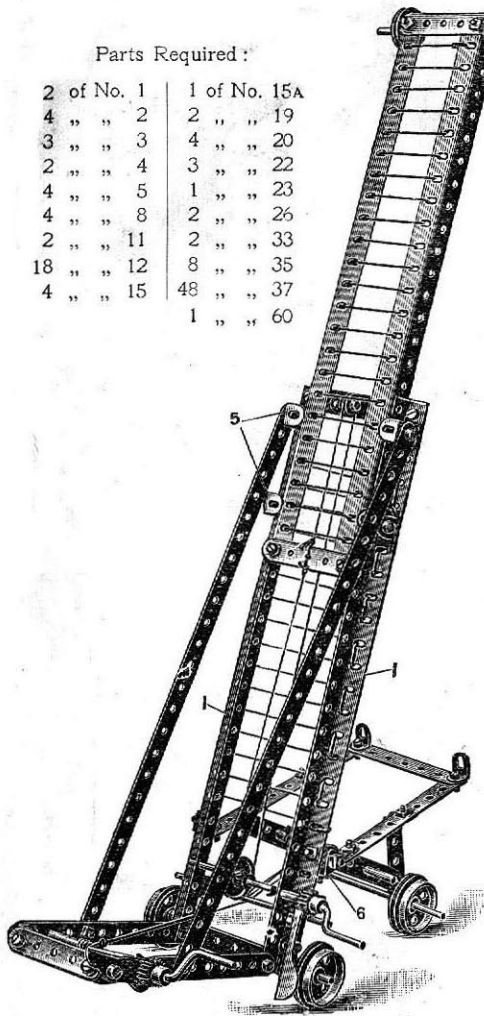


Fig. No. 159A


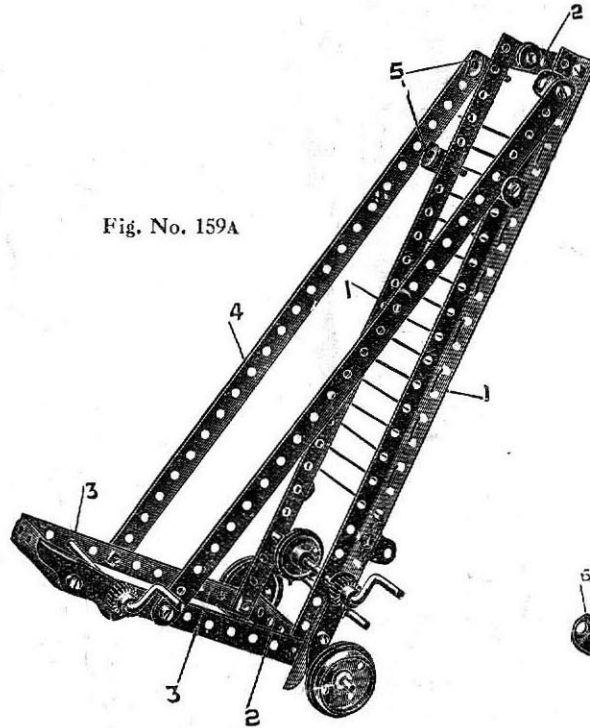



Fig. No. 159B

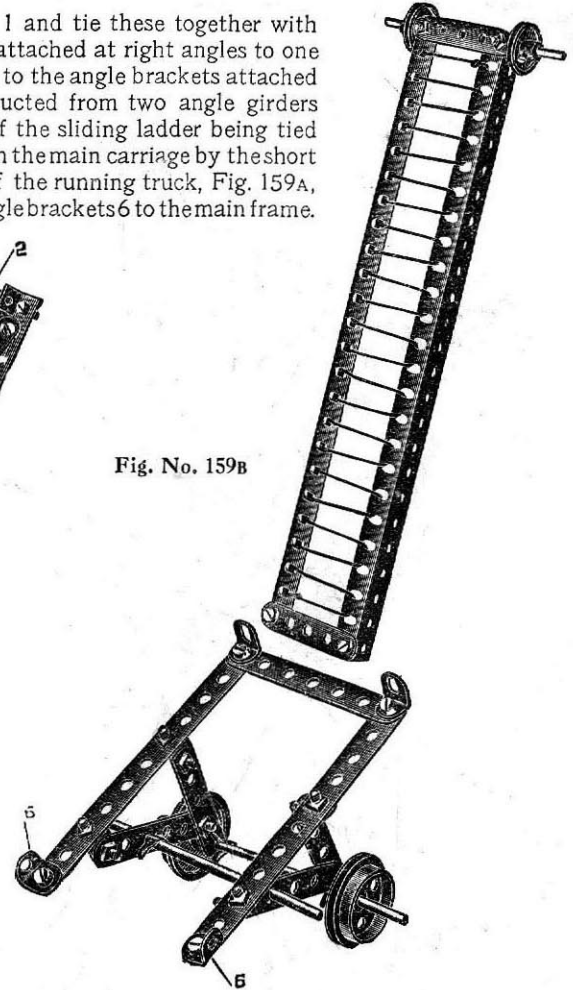

Model No. 160

Railway Wagon Swivel Crane

The swivelling action of this model is obtained as follows: The spindle 1 is fixed against rotation in a bush wheel 2 bolted to a cross $2\frac{1}{2}$ " bent strip 3 beneath the wagon. The pinion 4 on the spindle 1 is therefore fixed, and when the worm 5 is rotated by the cranked handle the whole crane rotates about the pinion.

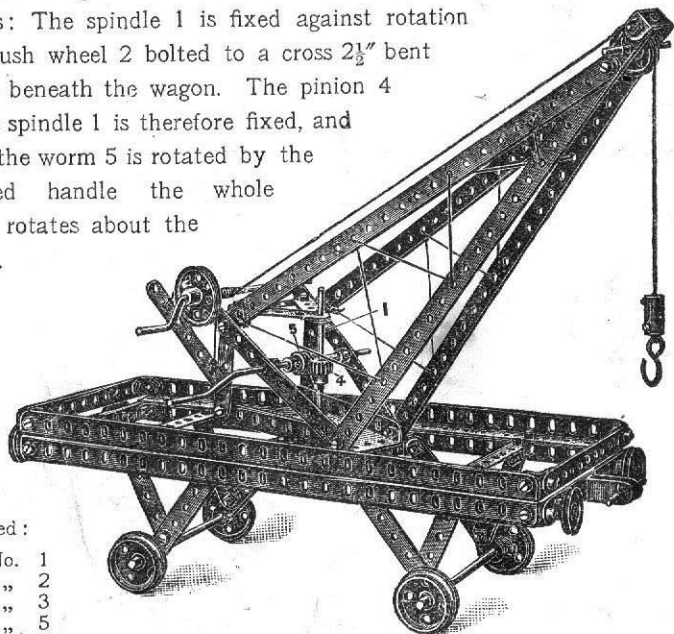

Parts Required:

- 4 of No. 1
- 8 " " 2
- 5 " " 3
- 9 " " 5
- 4 " " 8
- 1 " " 11
- 16 " " 12
- 3 " " 15
- 2 " " 17
- 2 " " 19
- 4 " " 20
- 4 " " 21
- 4 " " 22
- 1 " " 22A
- 1 " " 24
- 1 " " 26
- 1 " " 32

Parts Required:

- 5 of No. 35
- 69 " " 37
- 1 " " 44
- 1 " " 45
- 1 " " 52
- 1 " " 54
- 1 " " 57
- 2 " " 59
- 2 " " 60


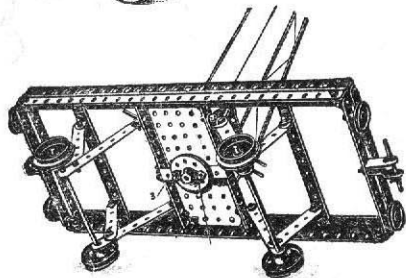


Fig. 160A

Model No. 161

Travelling Swivel Crane

The steering mechanism of this model is the same as in Model No. 127. The swivelling action of the jib is controlled by a handwheel 1 on an axle rod, at the foot of which is another 1" pulley 2, round which passes the operating cord to a $1\frac{1}{2}$ " pulley 3, on a 2" rod to which is secured a bush wheel 4 bolted to $2\frac{1}{2}$ " bent strips 5, Fig. 161A. Bolts are inserted in four holes of the bush wheel, the heads of which keep the crane from tilting sideways as it swivels.

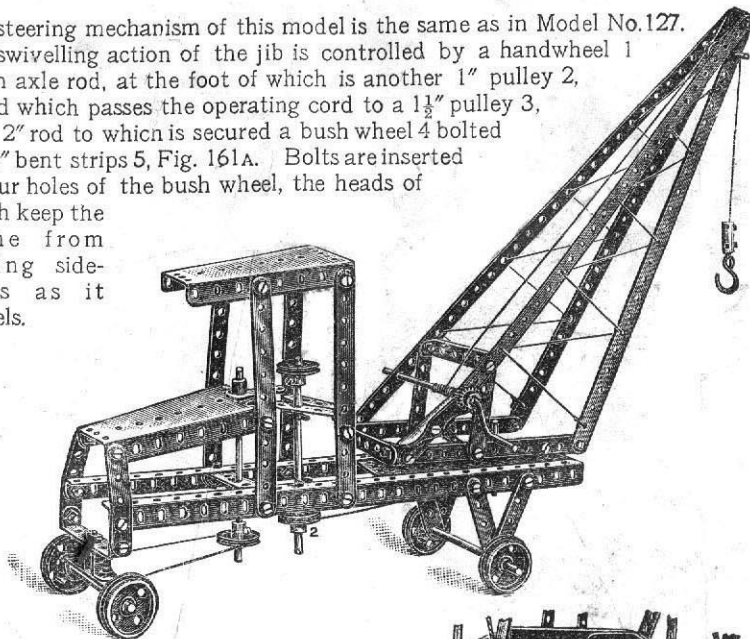

Parts Required:

- | | | |
|------------|-------------|-------------|
| 4 of No. 1 | 2 of No. 17 | 6 of No. 35 |
| 6 " " 2 | 1 " " 19 | 51 " " 37 |
| 2 " " 3 | 4 " " 20 | 1 " " 45 |
| 11 " " 5 | 1 " " 21 | 1 " " 52 |
| 2 " " 8 | 3 " " 22 | 2 " " 54 |
| 1 " " 11 | 1 " " 22A | 1 " " 57 |
| 2 " " 12 | 1 " " 24 | 6 " " 60 |
| 3 " " 15 | 1 " " 26 | 1 " " 62 |
| 1 " " 16 | 1 " " 33 | 1 " " 63 |

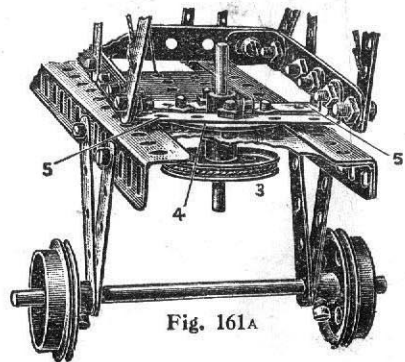


Fig. 161A

Model No. 162 Pile Driver

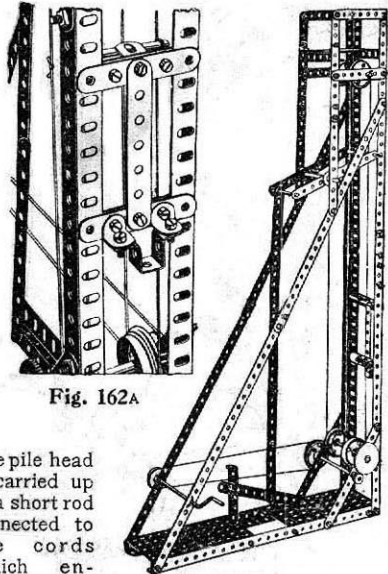



Fig. 162A

The pile head is carried up by a short rod connected to the cords which engages a catch on the head formed by an angle bracket. The short rod is disengaged from the angle bracket, being drawn away by a fixed cross rod as the short rod travels upward, and the pile head is thus released.

Parts Required:

5 of No. 1	3 of No. 15A	6 of No. 35
10 " " 2	2 " " 17	69 " " 37
6 " " 3	1 " " 19	1 " " 45
2 " " 4	4 " " 20	2 " " 52
4 " " 5	1 " " 21	1 " " 53
6 " " 8	1 " " 22	1 " " 60
6 " " 12	1 " " 26	2 " " 62
2 " " 15	1 " " 27A	

Model No. 163 Bob Sleigh



Parts Required:

7 of No. 2	1 of No. 24
6 " " 3	59 " " 37
12 " " 5	1 " " 45
2 " " 8	2 " " 52
2 " " 11	3 " " 53
1 " " 17	2 " " 54
1 " " 21	1 " " 63





Fig. 163A

Tip Wagon

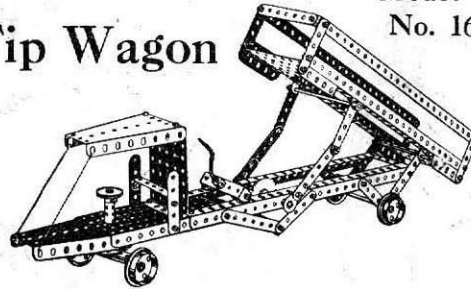


Model No. 165

Parts Required:

2 of No. 1	2 of No. 16	1 of No. 32	4 of No. 59
6 " " 3	1 " " 17	2 " " 35	4 " " 60
2 " " 4	1 " " 19	54 " " 37	2 " " 62
12 " " 5	4 " " 20	1 " " 45	1 " " 63
4 " " 8	1 " " 22	1 " " 52	
6 " " 12	1 " " 24	3 " " 53	
3 " " 15A	1 " " 27	2 " " 54	

Model No. 164 Tower Wagon

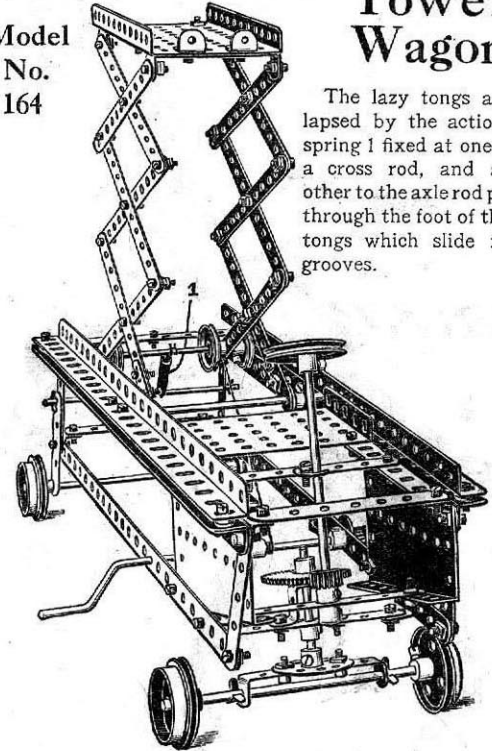

The lazy tongs are collapsed by the action of a spring 1 fixed at one end to a cross rod, and at the other to the axle rod passing through the foot of the lazy tongs which slide in the grooves.


Parts Required:

2 of No. 1	3 of No. 15	4 of No. 22	1 of No. 45
12 " " 2	2 " " 15A	1 " " 24	1 " " 52
6 " " 3	1 " " 17	2 " " 26	1 " " 53
2 " " 4	1 " " 19	1 " " 27	2 " " 54
4 " " 8	4 " " 20	1 " " 33	4 " " 56
1 " " 10	1 " " 21	65 " " 37	2 " " 62
4 " " 12			

Model No. 166

Parts Required:

1 of No.	2
2 " "	3
8 " "	8
3 " "	15
3 " "	15A
4 " "	20
1 " "	21
1 " "	22
1 " "	24
1 " "	26
1 " "	27

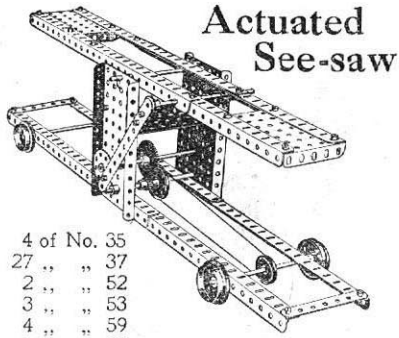


4 of No.	35
27 " "	37
2 " "	52
3 " "	53
4 " "	59
1 " "	62

Model No. 167 Coffee Grinder

Parts Required:

1 of No.	1	2 of No.	17
2 " "	2	1 " "	24
6 " "	3	2 " "	26
2 " "	4	26 " "	37
4 " "	5	2 " "	54
4 " "	12	4 " "	59
1 " "	15	2 " "	62
1 " "	16		




Demonstration Scales

Model No. 168


Parts Required:

5 of No.	1
10 " "	2
6 " "	3
12 " "	5
2 " "	8
2 " "	11
5 " "	12
1 " "	16
2 " "	20
1 " "	24
49 " "	37
2 " "	52
3 " "	53
2 " "	54

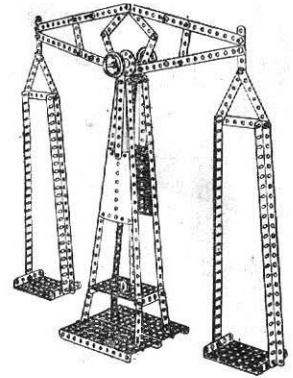

Model No. 169

Ice Boat

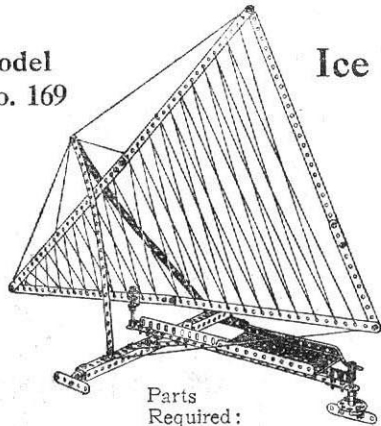


Parts Required:

7 of No.	1	3 of No.	11	39 of No.	37
1 " "	2	6 " "	12	1 " "	52
2 " "	3	2 " "	17	3 " "	59
3 " "	5	1 " "	19	2 " "	62
2 " "	8	1 " "	24	1 " "	63
2 " "	10				

Model No. 170

Motor Dump Truck

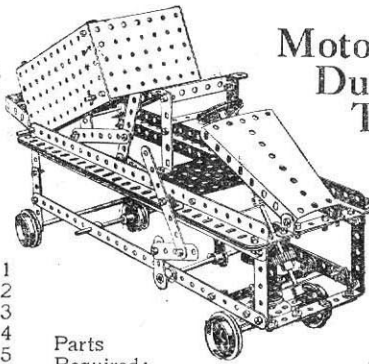


2 of No.	1
1 " "	2
6 " "	3
2 " "	4
11 " "	5
4 " "	8
9 " "	12
4 " "	15
2 " "	15A
1 " "	16
1 " "	17
4 " "	20
1 " "	21

Parts Required:

3 of No.	22	1 of No.	45
1 " "	23	2 " "	52
1 " "	24	3 " "	53
1 " "	26	1 " "	54
1 " "	27	4 " "	59
4 " "	35	6 " "	60
65 " "	37	2 " "	62

Model No. 171


Lawn Swing

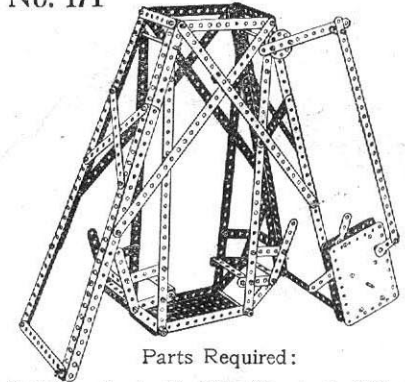

Parts Required:

9 of No.	1	2 of No.	15A	1 of No.	52
9 " "	2	2 " "	16	4 " "	59
6 " "	3	1 " "	24	6 " "	60
12 " "	5	6 " "	35	2 " "	62
8 " "	8	65 " "	37	1 " "	63

Model No. 172 **Letter Balance**

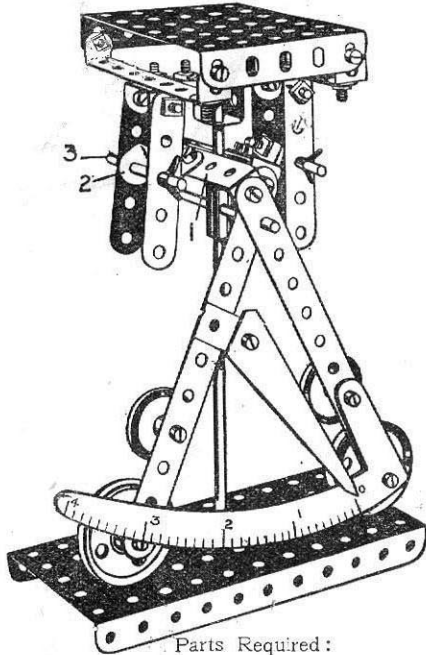


Parts Required:

2 of No. 2	2 of No. 20
1 " 3	2 " 22
5 " 5	8 " 35
2 " 10	40 " 37
4 " 11	1 " 45
4 " 12	1 " 52
1 " 15	1 " 53
1 " 16	4 " 60
2 " 17	1 " 63

Strip 1 is bolted by an angle bracket to a double bent strip 2, which forms the pivot round the rod 3.


Model No. 173 **Flax Cleaner**

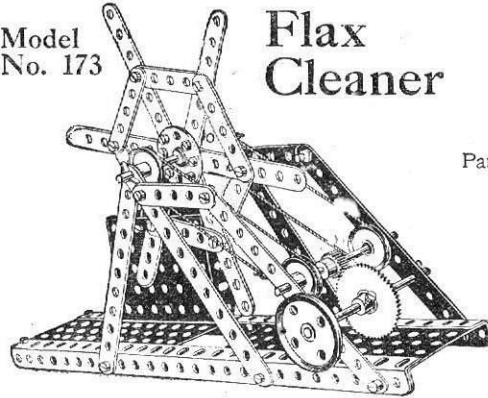

Parts Required:

6 of No. 2	3
6 " 3	5
8 " 5	8
2 " 8	15A
1 " 16	21
2 " 21	22
1 " 22	24
1 " 24	26
1 " 26	27A
1 " 27A	35
3 " 35	37
28 " 37	52
2 " 52	


Model No. 175 **Lace Jennie**

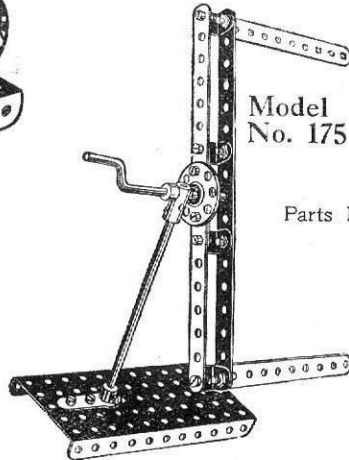

Parts Required:

8 of No. 2	
4 " 11	
1 " 15	
1 " 19	
1 " 24	
14 " 37	
1 " 52	
1 " 59	
1 " 62	
1 " 63	

Model No. 174 **Oscillating Steam Engine**

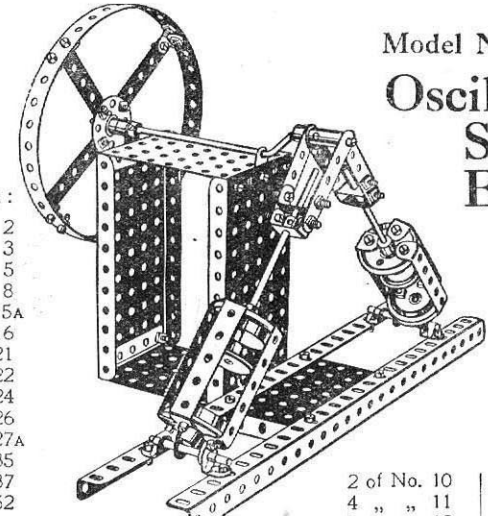

Parts Required:

4 of No. 20	
2 " 22	
1 " 24	
54 " 37	
2 " 52	
3 " 53	
4 " 59	
6 " 60	
1 " 63	
2 of No. 10	
4 " 11	
8 " 12	
2 " 15	
2 " 17	
1 " 19	
4 of No. 2	
8 " 5	
2 " 8	

Model No. 176 **Perambulator**


Parts Required:

3 of No. 1	1 of No. 16
10 " 2	4 " 19A
12 " 5	2 " 22
2 " 10	10 " 35
12 " 12	45 " 37
3 " 15A	1 " 52
	3 " 60



See Notice page 3

Model No. 177 "Drop the Nigger"

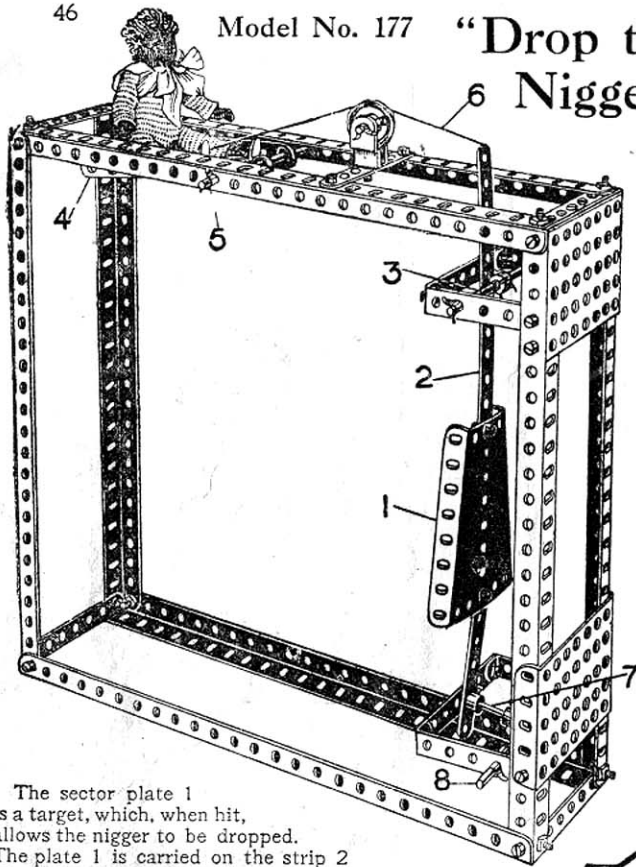


Parts Required:

1 of No.	1
6 "	3
8 "	8
1 "	12
3 "	15A
1 "	17
1 "	22
6 "	35
33 "	37
1 "	44
2 "	53
2 "	54
3 "	59
4 "	60
1 "	63

The sector plate 1 is a target, which, when hit, allows the nigger to be dropped. The plate 1 is carried on the strip 2 pivoted at 3, and the weight of the nigger supported on another sector plate 4 pivoted at 5 by means of the cord 6 keeps the lower end of the strip 2 hard against a short rod 7 pivoted at 8. When the target is hit and knocked back the rod 7 is released and falls about its pivot, allowing the sector plate 4, with the nigger, to drop.

Model No. 178 Newton's Disc

This is a model to show that white light is made up of the three primary colours—red, yellow, blue. Sectors of these three colours are mounted or painted on the disc, which, if then quickly rotated, shows as white.

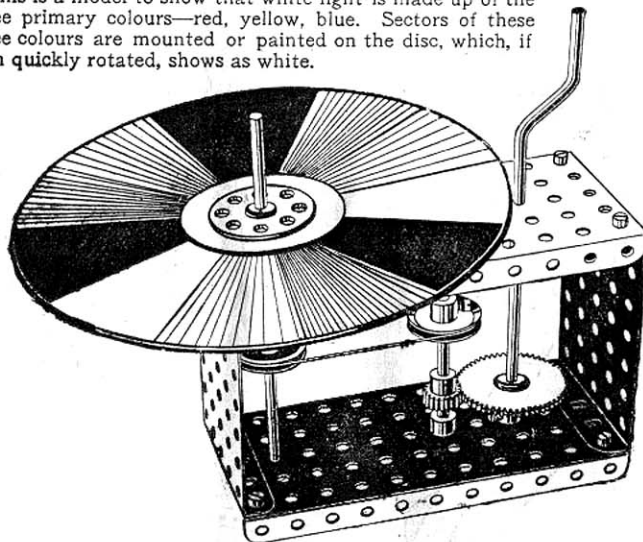

Parts Required:

1 of No.	15
1 "	15A
1 "	19
2 "	22
1 "	24
1 "	26
1 "	27
2 "	35
8 "	37
2 "	52
2 "	53
4 "	59


Model No. 179

Parts Required:

2 of No.	2
1 "	3
10 "	5
3 "	11
10 "	12


Wire Rope Maker

3 of No.	15	2 of No.	26	2 of No.	52
2 "	15A	1 "	27A	3 "	53
2 "	19	2 "	35	4 "	59
4 "	20	38 "	37	2 "	60
1 "	24	1 "	45	2 "	62

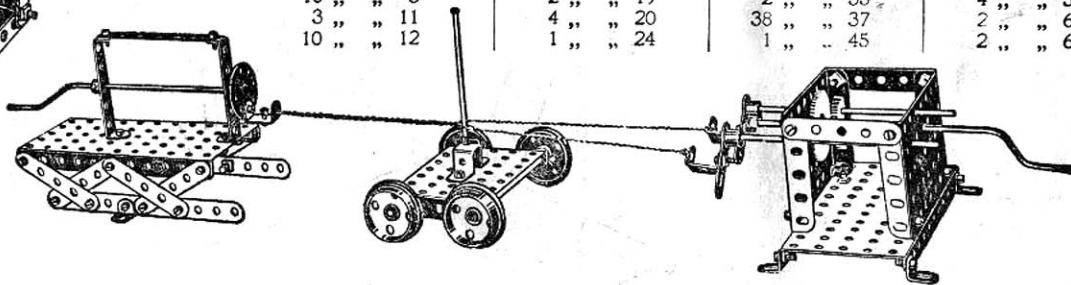

Model
No. 180

Roundabout

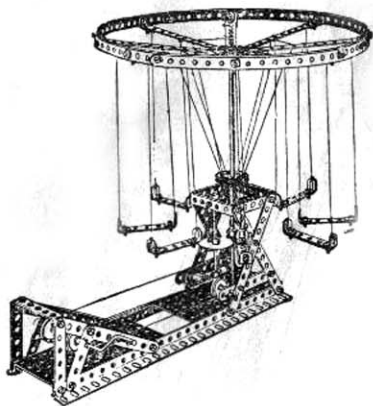


Parts Required:

3 of No. 1	4 of No. 22
14 " " 2	2 " " 26
2 " " 3	1 " " 27
2 " " 4	1 " " 32
12 " " 5	68 " " 37
2 " " 8	2 " " 52
24 " " 12	4 " " 59
3 " " 15	4 " " 60
1 " " 16	1 " " 63
1 " " 19	12 " " 38
1 " " 21	

Model No. 182

Field Gun and Carriage

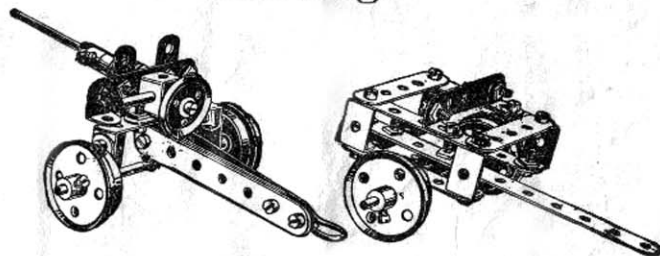


Parts Required:

1 of No. 2	2 of No. 15A	27 of No. 37
5 " " 3	1 " " 16	1 " " 45
12 " " 5	1 " " 17	1 " " 57
2 " " 10	4 " " 20	2 " " 59
4 " " 11	1 " " 22	2 " " 60
5 " " 12	1 " " 32	1 " " 63

Model
No. 183

Rattle




Parts Required:

2 of No. 4	2 of No. 26
3 " " 5	6 " " 37
4 " " 12	2 " " 59
1 " " 15	1 " " 63

Model No. 184


Scarifier

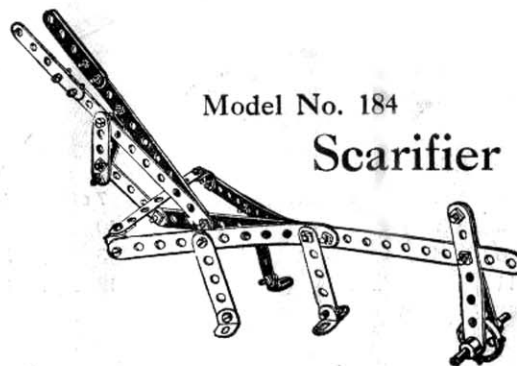

Parts Required:

6 of No. 2
3 " " 3
10 " " 5
6 " " 12
1 " " 17
1 " " 22
22 " " 37
2 " " 59


Model
No. 185 **Swing**

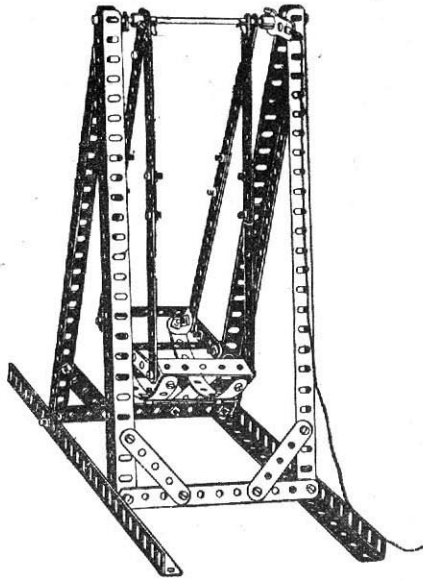

Parts Required :

12 of No. 2	1 of No 15
10 " " 5	45 " " 37
6 " " 8	4 " " 60
2 " " 11	2 " " 62
4 " " 12	


Model
No. 186 **Automatic
Swing Boat**

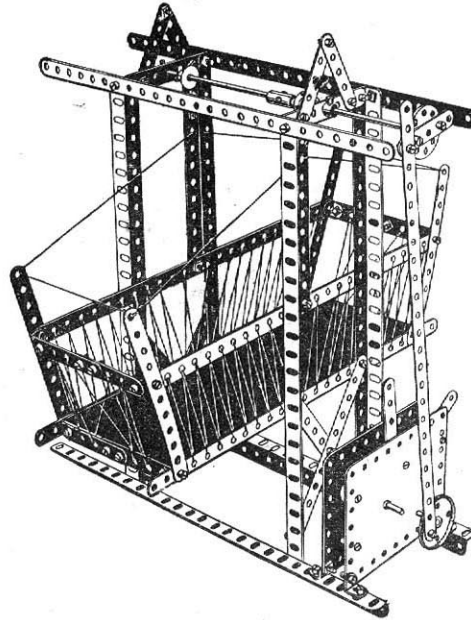

Parts Required :

7 of No. 1	1 of No. 21
10 " " 2	1 " " 24
3 " " 3	66 " " 37
12 " " 5	2 " " 59
4 " " 8	2 " " 62
12 " " 12	1 " " 63
2 " " 15	


Model
No. 187 **Swing**

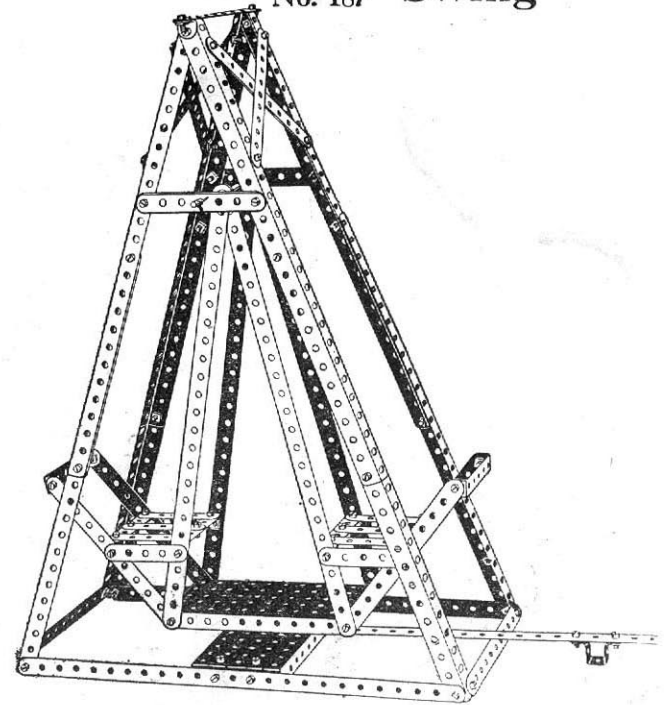

Parts Required :

7 of No. 1	1 of No. 15
11 " " 2	6 " " 35
2 " " 3	67 " " 37
10 " " 5	1 " " 45
8 " " 8	2 " " 52
6 " " 12	6 " " 60


Model No. 188 Pit Head Gear

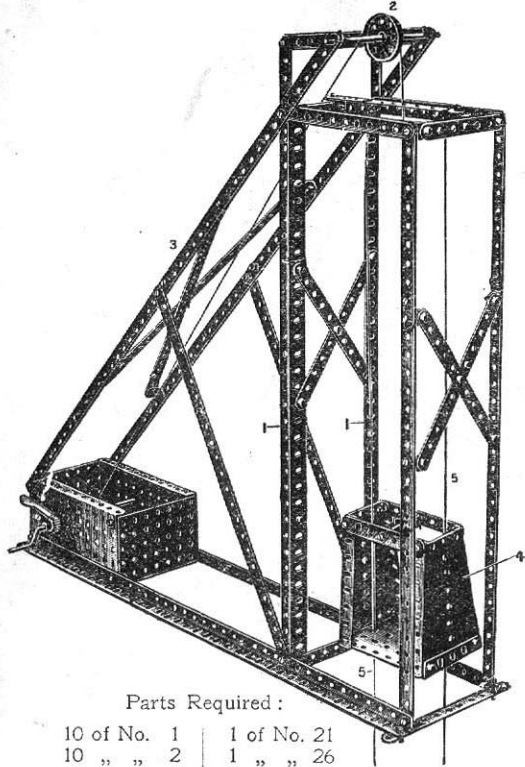

Parts Required :

10 of No. 1	1 of No. 21
10 " " 2	1 " " 26
6 " " 3	1 " " 33
4 " " 5	6 " " 35
8 " " 8	76 " " 37
1 " " 11	2 " " 52
14 " " 12	3 " " 53
1 " " 15	2 " " 54
1 " " 17	1 " " 59
1 " " 19	


Model No. 189 Locomotive Crane

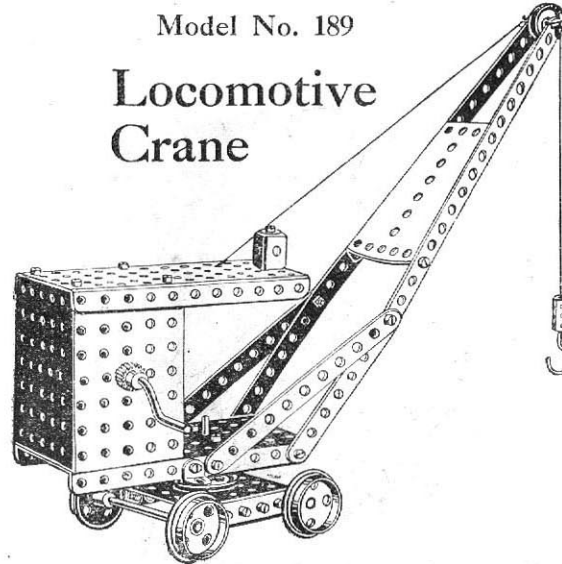

Parts Required :


2 of No. 1	1 of No. 24
2 " " 2	1 " " 26
2 " " 3	1 " " 33
3 " " 11	2 " " 35
2 " " 12	38 " " 37
2 " " 15A	2 " " 52
1 " " 17	3 " " 53
1 " " 18	1 " " 54
1 " " 19	1 " " 57
4 " " 20	2 " " 59
1 " " 21	5 " " 60
1 " " 22	1 " " 63

Model No. 190 Crane

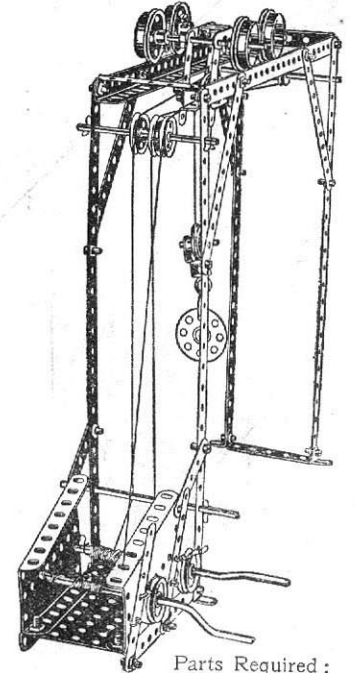


Parts Required :

4 of No. 1	4 of No. 20
6 " " 2	1 " " 21
2 " " 3	4 " " 22
10 " " 5	2 " " 22A
2 " " 8	1 " " 23
3 " " 11	1 " " 24
4 " " 12	12 " " 35
1 " " 15	32 " " 37
3 " " 15A	1 " " 44
1 " " 16	1 " " 52
1 " " 17	2 " " 54
1 " " 18	1 " " 57
2 " " 19	3 " " 60

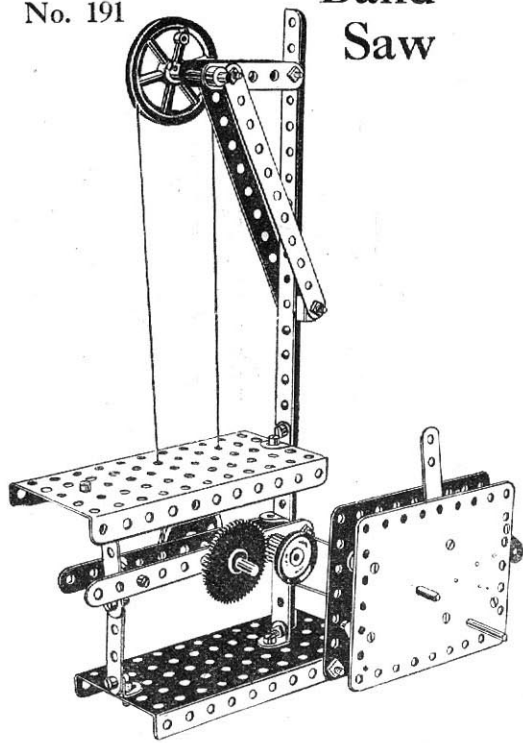Model
No. 191**Band
Saw**


Parts Required :

4 of No. 2	2 of No. 17	1 of No. 27A
4 " " 5	1 " " 20A	21 " " 37
1 " " 8	1 " " 21	2 " " 52
3 " " 11	1 " " 22	2 " " 59
3 " " 12	1 " " 26	1 " " 60
1 " " 16		

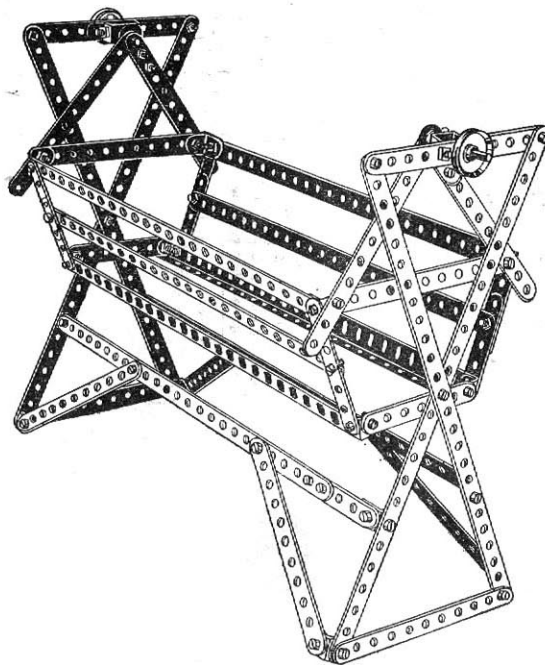Model No. 192 **Swing Cot**

Parts Required :


10 of No. 1	20 of No. 12
14 " " 2	2 " " 17
2 " " 3	2 " " 22
8 " " 5	62 " " 37
2 " " 8	2 " " 62
2 " " 11	

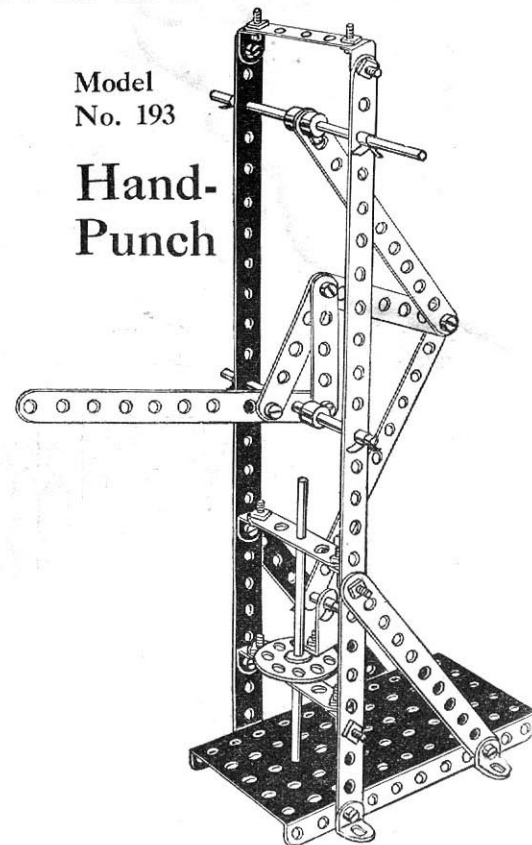Model
No. 193**Hand-
Punch**

Parts Required :

2 of No. 1	1 of No. 15	23 of No. 37
5 " " 2	2 " " 16	1 " " 44
1 " " 3	1 " " 18	1 " " 52
2 " " 5	1 " " 24	4 " " 59
8 " " 12	6 " " 35	3 " " 60


Model
No. 194 **Hand Car**

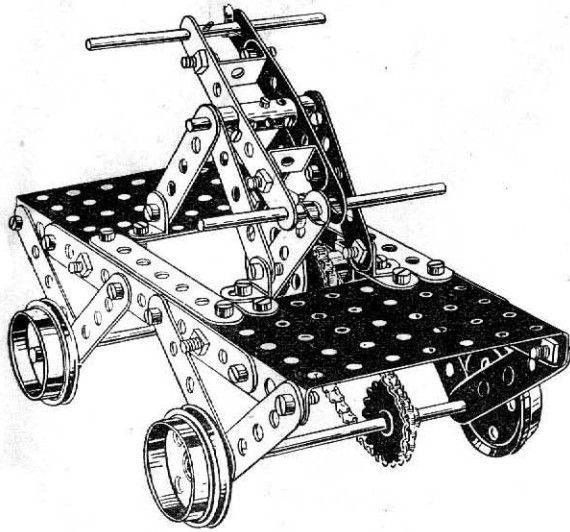

Parts Required :

2 of No. 2	2 of No. 15A	34 of No. 37
5 " " 3	2 " " 16	1 " " 45
12 " " 5	2 " " 17	2 " " 53
2 " " 10	4 " " 20	4 " " 59
2 " " 11	1 " " 24	1 " " 63
4 " " 12	4 " " 35	2 " " 96


Model
No. 195 **Oil Cake
Chopper**

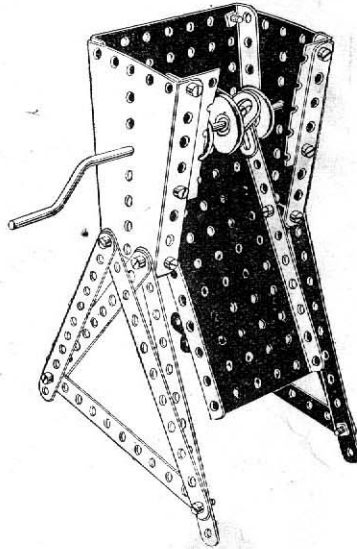

Parts Required :

10 of No. 2	20 of No. 37
4 " " 10	1 " " 52
4 " " 12	2 " " 53
1 " " 19	2 " " 54
4 " " 22	

Model
No. 196 **Rocking
Chair**

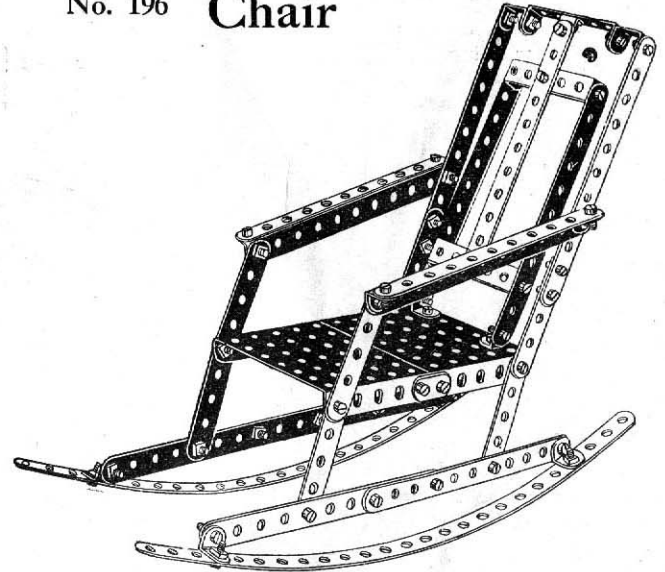

Parts Required :


2 of No. 1	2 of No. 10	48 of No. 37
13 " " 2	2 " " 11	2 " " 53
8 " " 5	11 " " 12	3 " " 60

HOW TO CONTINUE


This completes the Models which may be made with MECCANO Outfit No. 3. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 3A Accessory Outfit, the cost of which will be found in the Price List at the end of the Manual.

Standard Details for use in the Construction of Models on the Meccano Principle


A—A Brake Mechanism suitable for controlling winding or similar spindles.

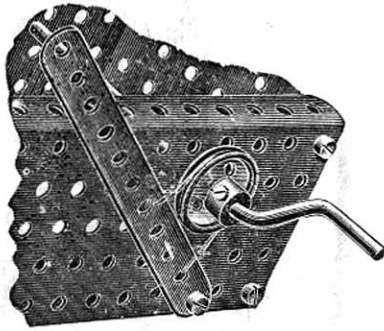


B—Type of Reversing Gear.

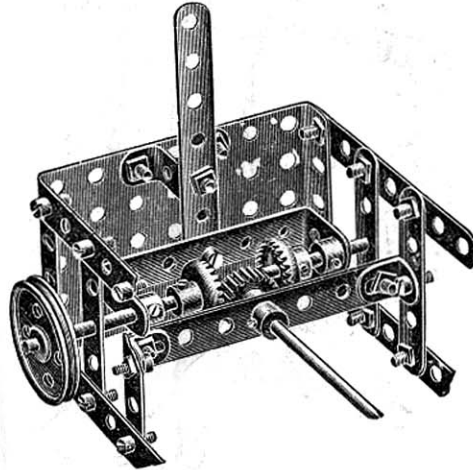


C—Worm and Worm Gear.

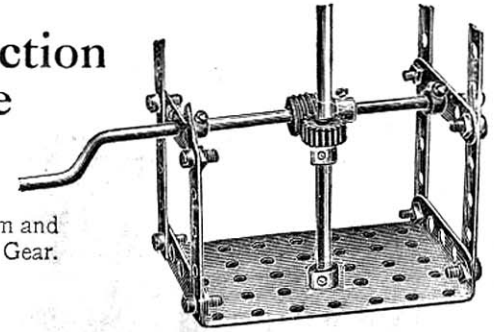


G—Method of operating a fast and loose pulley with a belt drive, one of the flanged wheels on the main shaft being secured whilst the other runs freely.

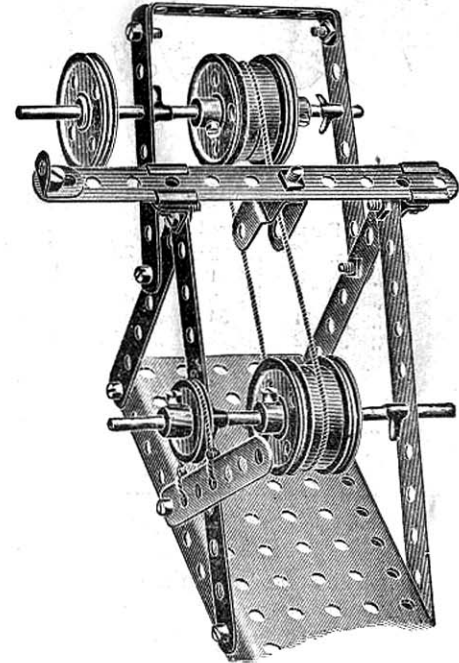


D—Method of locking swivelling connections with double nuts.




E—Pawl and Pinion or Ratchet Gear; used also as a brake.




F—Spring controlled Band Friction Brake.




H—Simple Extended Bearing suitable for longitudinal or rotary movement of spindles.

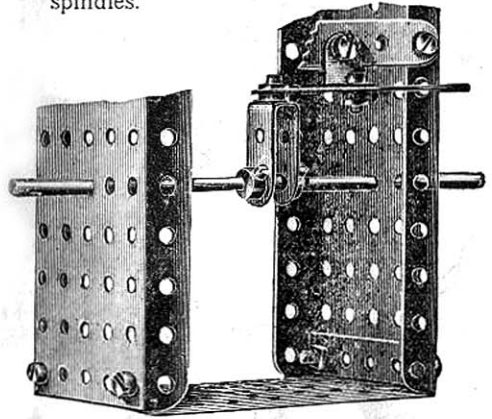


I—Gear Connection for coupling two shafts at right angles.

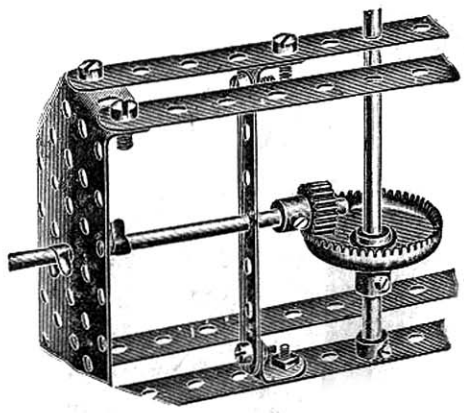


J—Purchase Pulley.

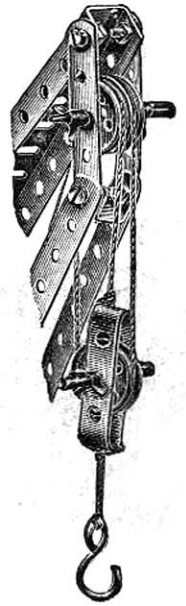



K—Swivel Bearing providing for combined sliding and oscillating movement of a strip.

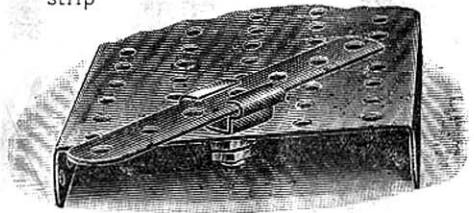

L—Jockey Pulley Arrangement for increasing grip in a driving band.

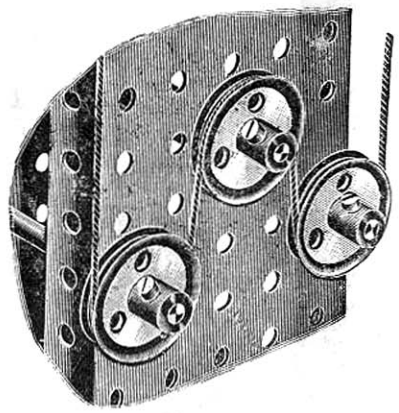


N—Crank formed with 1 1/2" pulley wheel and strip, lock-nutted. (See detail D.)

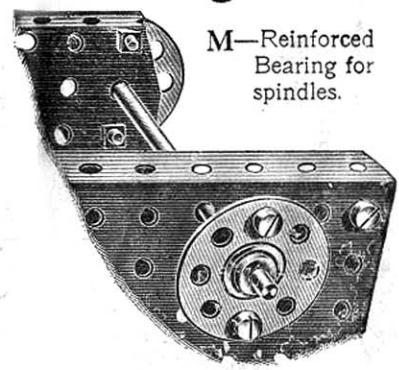


M—Reinforced Bearing for spindles.

O—Extended bearing for a spindle formed by a double bent strip bolted to a perforated plate.



P—Footstep bearing for a vertical spindle formed by bolting a double bent strip to a perforated plate.




Q—Overhung support for $\frac{1}{2}$ " pulley. The bolt spindle for the pulley is nipped on each side of the angle bracket.



R—Overhung support for larger pulley. The screwed end of the bolt is entered in the wheel boss and nipped by the set screw.




The Meccano Clockwork Motor



THE MECCANO CLOCKWORK MOTOR is a splendid piece of mechanism, simple, powerful, and reliable. It has been specially designed for use with Meccano models into which it may be built, thus becoming part of the model itself. It is simple in construction, and powerful and reliable in use. It is fitted with stopping and starting levers, and has a reversing movement. With extra gearing made from Meccano parts, a greater lifting power may be obtained. The Meccano Clockwork Motor is easy to understand and all its movements are fully explained in the instructions which accompany it. Price 12/6

The Meccano Electric Motor



THE MECCANO ELECTRIC MOTOR is strongly built, and has been specially designed to build into Meccano models. Elevators, Cranes, Sawmills, and Tool-shops are set in motion and rendered even more realistic. This greatly adds to the fun and fascination of building Meccano models. It is the most reliable and powerful toy electric motor made, and when properly geared will lift over 30 lbs. dead weight. It may be run by a 4-volt accumulator or, by employing a suitable transformer, direct from the main. The drive is taken up, either direct by shaft, or by transmission, and thus a positive and powerful drive is obtained. The Meccano Electric Motor is fitted with a reversing motion, provided with stopping and starting controls, and the gearing is interchangeable. Price 17/6



The Meccano Electrical Outfit

The application of Electricity to the Meccano system adds a further and wonderful charm. The joys of model building are now increased by the fascinating pastime of carrying out delightful electrical experiments.

THE MECCANO ELECTRICAL OUTFITS contain a number of specially designed electrical accessory parts, and, used in conjunction with any of the regular outfits, enable the user to construct models for making interesting and instructive experiments. These include the Electric Railway, Morse Key, Tapper Key, Buzzer, Electric Lamps, Electric Crane, Induction Coil, Electric Iron, Motor-Starter, etc.

Prices:

X1 (containing electrical parts, without motor or accumulator)	12/6
X2 (containing a Meccano Electric Motor, 4-volt accumulator, and electrical parts)	50/-

The Meccano Inventor's Accessory Outfit "A"

THE INVENTOR'S OUTFITS contain a selected assortment of valuable parts, which from time to time have been added to the Meccano system. By the aid of an Inventor's Outfit many Meccano Models in the Manual of Instructions can be much improved. ACCESSORY OUTFIT "A" contains four large 3 inch Pulley Wheels, new Gear Wheels, a supply of Washers, Sprocket Wheels and Sprocket Chain (for giving a positive drive) and a supply of the popular Meccano Braced Girders, which give a fine finish to Meccano Models. Price 10/-


The Meccano Inventor's Accessory Outfit "B"

By adding either or both of the Inventor's Accessory Outfits, the possessor of one of the main Meccano Outfits, from No. 0 to No. 6 is enabled to construct a very large number of further models thereby deriving a great deal of extra enjoyment. They make a splendid addition to any Meccano Outfit.


ACCESSORY OUTFIT "B" contains a magnificent assortment of new parts, including Bevel Gears, 1 inch Gear Wheels, Flat Plates, Octagonal and Strip Couplings, Triangular Plates, Screwed Rods, Curved Strips, Rack Strips, Hinges, Buffers and Couplings for constructing trains. Every boy who is interested in engineering subjects will find this outfit of the greatest service to him, not only providing him with new movements, but also considerably extending the scope of his experiments.

Price 25/-

Particulars and Prices of Meccano Parts




No.	Description	s.	d.
1.	Perforated Strips, 12½" long ½ doz.	1	3
1A.	" " 9½" " "	1	0
2.	" " 5½" " "	0	9
2A.	" " 4½" " "	0	7
3.	" " 3½" " "	0	5
4.	" " 3" " "	0	4
5.	" " 2½" " "	0	4
6.	" " 2" " "	0	4
6A.	" " 1½" " "	0	3




No.	Description	s.	d.
7.	Angle Girders, 24½" long ..each	0	9
7A.	" " 18½" " ..	0	7
8.	" " 12½" " ½ doz.	2	3
8A.	" " 9½" " "	1	9
9.	" " 5½" " "	1	3



No.	Description	s.	d.
10.	Flat Brackets .. ½ doz.	0	3




No.	Description	s.	d.
11.	Double Bracketseach	0	1




No.	Description	s.	d.
12.	Angle Bracketsdoz.	0	6




No.	Description	s.	d.
12A.	Angle Brackets, 1" ..each	0	2



No.	Description	s.	d.
13.	Axle Rods, 11½" long ..each	0	5
13A.	" " 8" " ..	0	3
14.	" " 6" " ..	0	2
15.	" " 5" " ..	0	2
15A.	" " 4½" " ..	0	2
16.	" " 3½" " ..	0	1
17.	" " 2" " ..	0	1
18A.	" " 1" " ..	0	1




No.	Description	s.	d.
19.	Crank Handleseach	0	3





No.	Description	s.	d.
19A.	Wheels, 3" diam. with set screws each	0	9



No.	Description	s.	d.
20.	Flanged Wheelseach	0	9



No.	Description	s.	d.
19B.	Pulley Wheels, 3" diam. with centre boss and set screw, each	1	0
20A.	2" " " " " " " " " "	0	9

No.	Description	s.	d.
21.	Pulley Wheels, 1½" diam. with centre boss and set screw, each	0	9
22.	1" " " " " " " " " "	0	6
22A.	1" " " without " " " " " "	0	3
23.	½" " " " " " " " " "	0	2
23A.	½" " " with " " " " " "	0	6



No.	Description	s.	d.
24.	Bush Wheelseach	0	8



No.	Description	s.	d.
25.	Pinion Wheels, ¾" diam. each	1	3
26.	" " ½" " " " "	0	9



No.	Description	s.	d.
27.	Gear Wheels, 50 teeth to gear with ¾" pinion, each	0	10
27A.	56 " " " ½" " " "	1	0



No.	Description	s.	d.
28.	Contrate Wheels, 1½" dia. each	1	3
29.	" " 1" " " " " "	1	0




No.	Description	s.	d.
30.	Bevel Gears ..each	1	6



No.	Description	s.	d.
31.	Gear Wheels, 1", 40 teeth, each	1	9




No.	Description	s.	d.
32.	Worm Wheels ..each	0	10




No.	Description	s.	d.
33.	Pawls (complete) each	0	5
33A.	Pivot Bolts with nuts, " "	0	2




No.	Description	s.	d.
34.	Spannerseach	0	3



No.	Description	s.	d.
35.	Spring Clips per box (doz.)	0	6



No. 36. Screw Driverseach 0 3
36A. " " (Special) 1 9



37. Nuts and Bolts per box (doz.) 0 6
37A. Nuts " " 0 3
37B. Bolts " " 0 4
38. Washers " " 0 2
40. Hanks of Cord2 for 0 3



41. Propeller Blades .. per pair 0 6




43. Springs each 0 2



44. Cranked Bent Strips .. each 0 2




45. Double Bent Strips .. each 0 2



No. 46. Double Angle Strips, $2\frac{1}{2}'' \times 1''$ each 0 3



50. Eye Pieces each 0 2




52. Perforated Flanged Plates, $5\frac{1}{2}'' \times 2\frac{1}{2}''$ each 0 6
52A. Flat Plates See No. 70.




53. Perforated Flanged Plates, $3\frac{1}{2}'' \times 2\frac{1}{2}''$ each 0 5
53A. Flat PlatesSee No. 70



54. Perforated Flanged Sector Plates each 0 5
56. Instruction Manuals, No. 1. .. 2 6
56A. " " No. 2. .. 1 3




No. 57. Hookseach 0 1
57A. " (scientifico) 0 1




58. Spring Cord .. per length 1 0




59. Collars with Set Screws each 0 3



60A. Double Angle Strips, $1\frac{1}{2}'' \times \frac{1}{2}''$ 0 1
60. " " " $2\frac{1}{2}'' \times \frac{1}{2}''$ 0 1 $\frac{1}{2}$
60B. " " " $3\frac{1}{2}'' \times \frac{1}{2}''$ 0 2
60C. " " " $5\frac{1}{2}'' \times \frac{1}{2}''$ 0 3




61. Windmill Sails each 0 3




62. Crankseach 0 6
62A. Threaded Cranks, each 0 6



No. 63. Couplings.. ..each 0 9



63A. Octagonal Couplings, ea. 0 9




63B. Strip Couplings ..each 0 9




64. Threaded Bosses .each 0 3

65. Centre Forks 0 3
66. Weights, 50 gramme, .. 0 6
67. " 25 " .. 0 4
68. Woodscrews, $\frac{1}{2}''$.. doz. 0 3
69. Set Screws 0 4
69A. Grub Screws 0 4



70. Flat Plates, $5\frac{1}{2}'' \times 2\frac{1}{2}''$ ea. 0 5
72. " $2\frac{1}{2}'' \times 2\frac{1}{2}''$ " 0 3
52A. " $5\frac{1}{2}'' \times 3\frac{1}{2}''$ " 0 5
53A. " $4\frac{1}{2}'' \times 2\frac{1}{2}''$ " 0 4

Particulars and Prices of Meccano Parts (continued)



No.	Description	Quantity	s.	d.
76.	Triangular Plates, 2½"	..each	0	2
77.	" " 1"	.. " "	0	1½



80.	Screwed Rods, 5"	..each	0	6
80A.	" " 3½"	.. " "	0	5
81.	" " 2"	.. " "	0	3



89.	Curved Strips, 5½"	..each	0	2
90.	" " 2½"	.. " "	0	1



94.	Sprocket Chain	.. per yard	1	0
-----	----------------	-------------	---	---




95.	Sprocket Wheels, 2" diam.	each	0	6
95A.	" " 1½"	" "	0	5
96.	" " 1"	" "	0	4
96A.	" " ¾"	" "	0	3



97.	Braced Girders, 3½" long	½ doz.	0	9
98.	" " 2½"	" "	0	6
99.	" " 12½"	" "	1	9


No.	Description	Quantity	s.	d.
99A.	Braced Girders 9½" long	½ doz.	1	6
100.	" " 5½"	" "	1	0
101.	Healds .. for Looms..	doz.	0	9
102.	Single Bent Strips	.. each	0	2
103.	Flat Girders, 5½" long	.. " "	0	2
103A.	" " 9½"	" "	0	3
103B.	" " 12½"	" "	0	4
104.	Shuttles	.. " "	4	0
105.	Reed Hooks	.. " "	0	3
Rollers for Looms.				
106.	Cloth Rollers	.. each	1	3
106A.	Sand Rollers.	.. " "	1	6
107.	Tables for Designing Machines	.. " "	1	0



108.	Architraves	.. each	0	3
------	-------------	---------	---	---



109.	Face Plates, 2½" diam.	..each	0	6
------	------------------------	--------	---	---




110.	Rack Strips, 3½"	..each	0	3
------	------------------	--------	---	---




111.	Bolts, ¾"	.. each	0	1
------	-----------	---------	---	---



112.	Double Angle Strips,	2½" × 1½"	each	0	3
112A.	Double Angle Strips,	3" × 1½"	each	0	3



No.	Description	Quantity	s.	d.
113.	Girder Frames	..each	0	4




114.	Hinges	.. per pr.	0	7
------	--------	------------	---	---




115.	Threaded Pins	.. each	0	2
------	---------------	---------	---	---



120.	Buffers	.. each	0	2
------	---------	---------	---	---




121.	Train Couplings	.. each	0	6
122.	Miniature Loaded Sacks	.. " "	0	2




123.	Cone Pulleys	.. each	1	6
------	--------------	---------	---	---



No.	Description	Quantity	s.	d.
124.	Reversed Angle Brackets, 1"	½ doz.	0	10
125.	Reversed Angle Brackets, ½"	½ doz.	0	7



126.	Trunnions	..each	0-4	3d.
------	-----------	--------	-----	-----



127.	Simple Bell Cranks	each	0	3
128.	Boss Bell Cranks	each	0	6




129.	Rack Segments,	3" dia.	each	0	6
------	----------------	---------	------	---	---

As new parts are frequently added to the Meccano System, the foregoing list is not necessarily complete. The latest illustrated list should be obtained from your dealer, or from Meccano, Ltd., Liverpool.

Contents of Outfits

No.	DESCRIPTION OF PARTS.	0	0A	1	1A	2	2A	3	3A	4	4A	5	5A	6
1	Perforated Strips, 12 $\frac{1}{2}$ " ..	—	4	4	6	10	—	10	4	14	—	14	34	48
2	" " 5 $\frac{1}{2}$ " ..	4	2	6	10	16	2	18	4	22	4	26	34	60
3	" " 3 $\frac{1}{2}$ " ..	—	1	1	1	2	4	6	2	6	11	17	19	36
4	" " 2 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
5	" " 2" ..	9	—	9	3	12	2	12	2	20	24	44	4	48
6	" " 2" ..	—	—	—	4	4	—	8	—	8	6	6	18	24
8	Perforated Angle Cirders, 12 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
9	" " 5 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
10	Flat Brackets ..	4	—	4	—	4	—	4	4	8	—	8	8	16
11	Double Brackets ..	—	1	1	3	4	—	4	4	4	—	—	8	16
12	Angle Brackets ..	8	4	12	12	12	12	24	12	36	17	53	6/	120
13	Rods, 1 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	2	2	—	2	2	4
13A	" " 8" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
14	" " 6" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
15	" " 5" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
15A	" " 4 $\frac{1}{2}$ " ..	2	1	3	1	3	1	3	—	3	—	3	1	4
16	" " 3 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
17	" " 2" ..	2	—	2	1	2	1	2	2	4	—	4	3	7
18	" " 1" ..	—	1	1	—	1	1	2	2	2	—	2	2	2
19	Crank Handles ..	1	—	1	—	1	—	1	1	2	—	2	2	4
20	Flanged Wheels ..	—	—	—	4	4	—	4	4	8	—	8	8	16
21	Pulley Wheels, 1 $\frac{1}{2}$ " ..	4	2	4	—	4	—	4	4	8	—	8	8	16
22	" " 1" (fast) ..	—	—	—	—	—	—	—	—	—	—	—	—	—
22A	" " 1" (loose) ..	1	—	1	—	1	—	1	—	2	—	2	2	4
23	" " 1" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
24	Bush Wheels ..	1	—	1	—	1	—	1	—	2	—	2	2	4
25	Pinion Wheels, $\frac{3}{4}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
26	" " 1" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
27	Gear Wheels, 50 teeth ..	—	—	—	—	—	—	—	—	—	—	—	—	—
27A	" " 56 teeth ..	—	—	—	—	—	—	—	—	—	—	—	—	—
28	Contrate Wheels, 1 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
29	" " 3" ..	—	—	—	—	—	—	—	—	—	—	—	—	—
32	Worm Wheels ..	—	—	—	—	—	—	—	—	—	—	—	—	—
33	Pawls ..	—	—	—	—	—	—	—	—	—	—	—	—	—
34	Spanners ..	—	1	1	—	—	—	2	1	2	—	2	—	—
35	Spring Clips ..	4	2	6	—	6	6	12	6	18	—	18	6	24
36	Screwdrivers ..	—	5	30	25	55	25	80	50	130	45	175	290	465
37	Nuts and Bolts ..	1	—	1	1	1	—	1	1	4	—	4	6	12
40	Hanks of Cord ..	1	—	1	—	—	—	—	—	—	—	—	—	—
41	Propeller Blades ..	—	—	—	—	—	—	—	—	—	—	—	—	—
43	Springs ..	—	—	—	—	—	—	—	—	—	—	—	—	—
44	Cranked Bent Strips ..	1	—	1	—	1	—	1	1	1	—	1	1	2
45	Double Bent Strips ..	—	—	—	—	—	—	—	—	—	—	—	—	—
46	Large Bent Strips ..	—	—	—	—	—	—	—	—	—	—	—	—	—
50	Eye Pieces ..	1	—	1	—	1	—	2	1	2	—	2	3	4
52	Perforated Flanged Plates, 5 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " ..	1	—	1	—	1	—	2	1	2	—	2	3	4
53	" " 3 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " ..	—	—	—	—	—	—	—	—	—	—	—	—	—
54	" " Sector Plates ..	1	1	2	—	2	3	3	1	4	—	4	4	8
56	Manual of Instructions ..	1	1	1	—	1	—	1	—	3	—	3	3	8
57	Hooks ..	1	—	1	—	1	—	1	—	1	—	1	1	2
58	Spring Cord ..	—	—	—	—	—	—	—	—	—	—	—	—	—
59	Collars with Set Screws ..	—	—	—	—	—	—	—	—	—	—	—	—	—
60	Bent Strips, 2 $\frac{1}{2}$ " ..	2	2	4	2	6	4	6	4	8	—	8	10	18
61	Windmill Sails ..	—	—	—	—	—	—	—	—	—	—	—	—	—
62	Cranks ..	—	—	—	4	4	—	4	2	4	—	4	7	16
63	Couplings ..	—	—	—	—	—	—	—	—	—	—	—	—	—
65	Centre Fork ..	—	—	—	2	2	—	2	1	2	—	2	2	3
94	Sprocket Chain (length) ..	—	—	—	—	—	—	—	5	6	—	6	6	8
		—	—	—	—	—	—	—	1	1	—	1	1	1

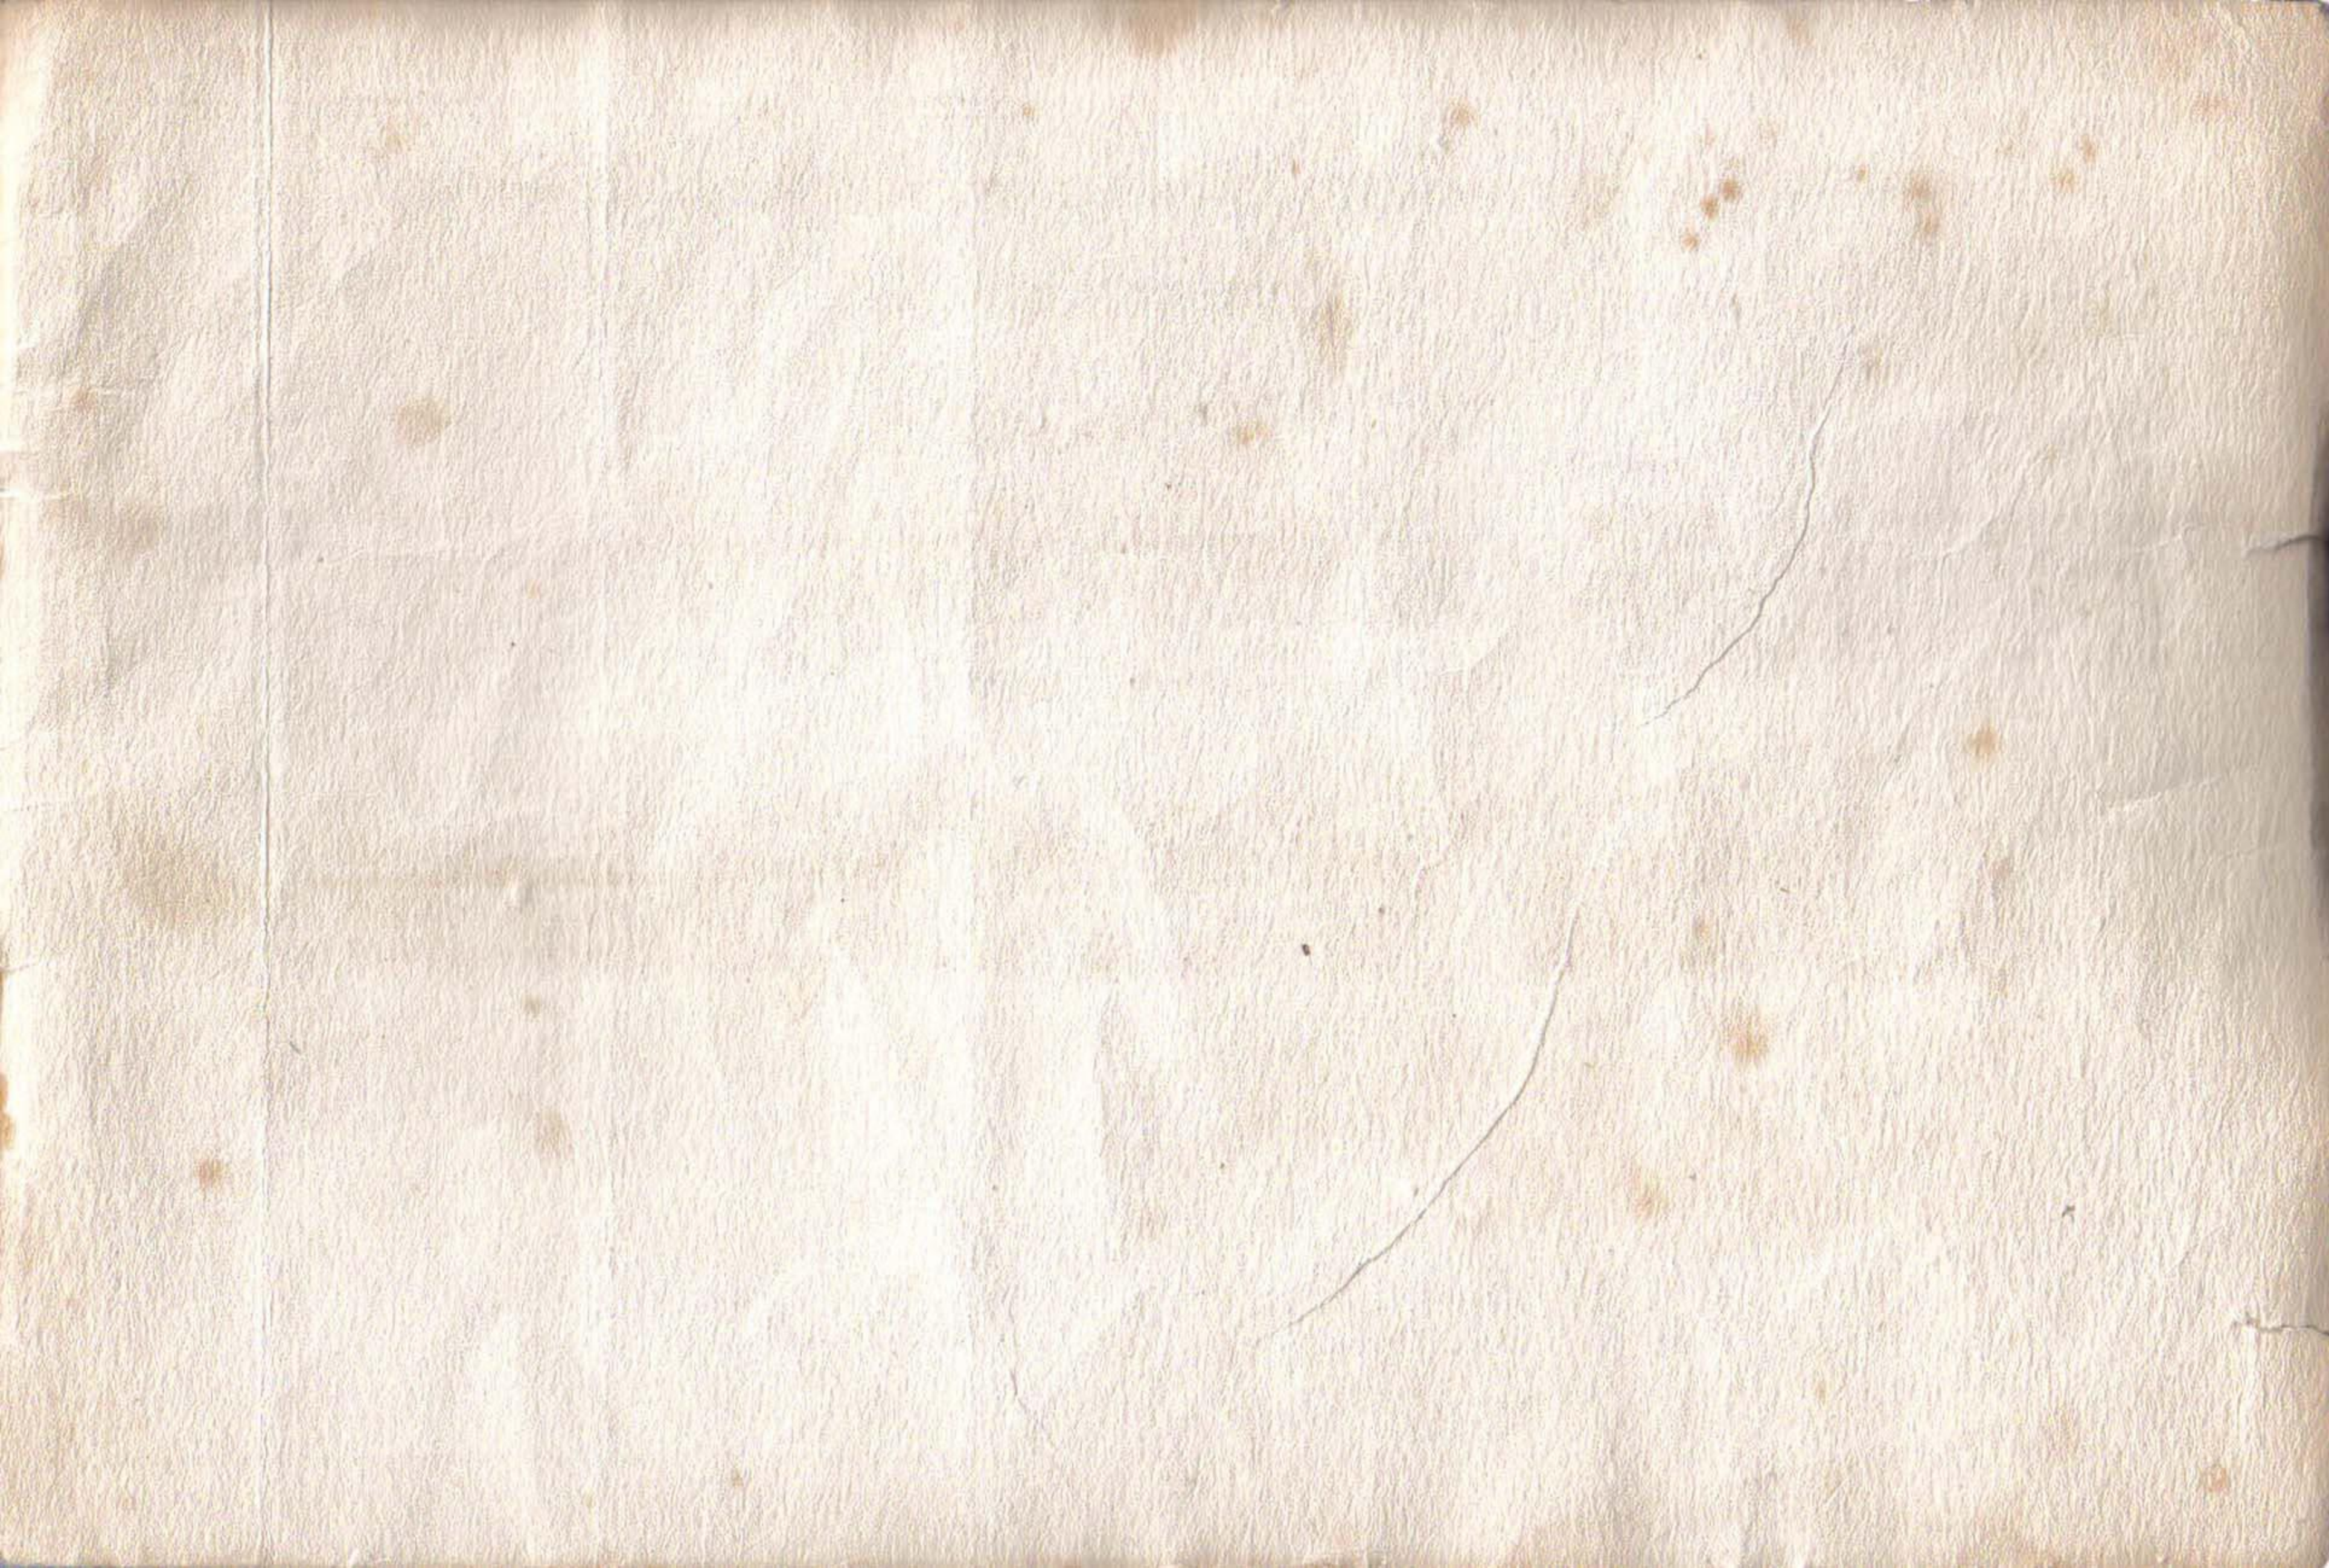

MECCANO IS MORE THAN A TOY

IT is important to remember that when a boy is playing with Meccano he is using engineering parts in miniature, and that these parts act in precisely the same way as the corresponding engineering elements would do in actual practice. No other system of model construction could, therefore, be correct. Other toys which attempt the same object by other methods must avail themselves of other constructive elements which are not correct engineering elements. Consequently, though a boy may succeed in building playthings with them, they are merely toys, and nothing else, and his mind, as regards proper mechanical construction and methods, is distorted instead of instructed. He thus learns wrong principles, and when his ambition tempts him to invent or construct more elaborate models he will be stopped by the deficiencies of his non-mechanical system.

No Outfit is genuine unless it bears the
trade mark **MECCANO**